

TECHNICAL DATA SHEET

BRISTAN

BEELINE


BEELINE MONOBLOC SINK MIXER WITH PULL OUT NOZZLE

Product Specification

Product Code:	BE SNK C
Finish:	Chrome
Product Type:	Contemporary
Construction:	Body is of brass construction and is designed to conform to BS EN 200
Valve Type:	¼ turn ½" ceramic disc valves
Supply:	Suitable for high pressure supplies only.
Inlet Connections:	2 x 10mm Flexible Connecting Tails
Water Pressure:	Min. 1.0 bar, Max. 8.0 bar



© Bristan Group 2009

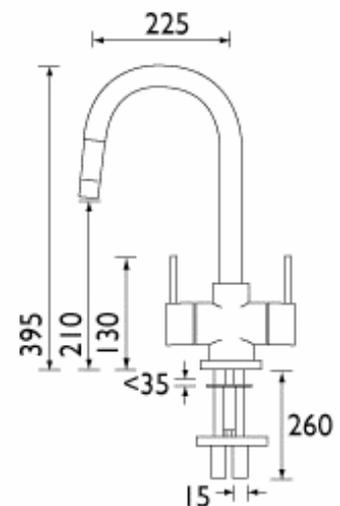

Additional Information

- Supplied with pull out nozzle with 600mm flexible hose.
- Supplied with check valves (pre-fitted to flexible tails & pull out spray).
- Supplied with metal handles.
- Particular attention should be paid to this product which will need to be installed in accordance with your local Water Authority/Water Regulations.
- Chrome plated to BS EN 248.

Technical Advice: For further information please call 0844 7016273 or email customercare@bristan.com.
Guarantee: 5 years covering manufacturing faults.

Compliance / Approvals

WRAS: Manufactured to comply with WRAS

Flow Rates (litres per minute)

System Pressure	1bar	1.5bar	2bar	3bar	4bar	5bar
BE SNK C (mixed)	9.6	11.9	13.9	17.0	19.6	21.9



AFTERCARE INSTRUCTIONS

Your fitting has a high quality finish and should be treated with care to preserve the visible surfaces.

All surface finishes will wear if not cleaned correctly, the only safe way to clean your mixer is to wipe with a soft damp cloth. Stains can be removed using washing up liquid. All bath cleaning powders and liquids will damage the surface of your fitting, even the non-scratch cleaners. **NOTE: Never use abrasive detergents or disinfectants or those containing alcohol, hydrochloric acid or phosphoric acid.**

Bristan recommend E-Cloth for cleaning all of our bathroom & kitchen products. Using just water, E-cloth gives a smear free, deep clean by breaking up and holding dirt, which normal cloths leave behind. Order through your Bristan stockist. (ORDER CODE: ECLOTH)



GUARANTEE

All products are manufactured to the highest standards and a 5 year guarantee covers any defect in manufacture.

NOTE: All products must have access for servicing or replacement during the life of the product.

In the interests of continuous product development we reserve the right to alter specification as necessary

TELEPHONE HELPLINE: 0844 701 6273

Bristan Group Limited
Birch Coppice Business Park
Dordon
Tamworth
Staffordshire
B78 1SG
UK
A Masco Company
Website: www.bristan.com
Telephone: 0844 701 6274
Facsimile: 0844 701 6275
Email: enquire@bristan.com

BRISTAN

Beeline Monobloc Kitchen Mixer

Fitting Instructions & Contents List

Before starting any installation project please consider:

Prior to drilling into walls, check there are no hidden electrical wires, cables or water supply pipes with the aid of an electronic detector. If you use power tools do not forget:

- Wear eye protection
- Unplug equipment after use



Please keep these instructions for future reference and request of replacement part

WATER PRESSURE

This mixer requires a 1.0 bar minimum supply pressure to perform satisfactorily

Operating Pressures: Min 1.0 bar, Max 8.0 bar.


This mixer should be installed in compliance with the Water Regulations. Where the supplies are unbalanced, i.e. hot water from cylinder tank / cold from the mains, approved check valves must be fitted in the supply pipes.

For further details contact your Local Water Authority.

N.B. This mixer is supplied with a check valve fitted in the pull out spray, as well as two additional check valves, fitted to the flexi tails. The check valves have been fitted in order to prevent backflow i.e. Cold from the mains and hot via a hot water cylinder, in order to comply with Water Regulations. For further details contact your Local Water Authority.

CONTENTS

1. Mixer
2. Locating stud
3. Plinth
4. Rubber Washer
5. Triangular fixing bracket
6. C-shaped rubber washer
7. C-shaped metal washer
8. Nut
9. Threaded rod
10. Small washer
11. Flexi Tails (Check Valves Fitted)
12. Hose weight

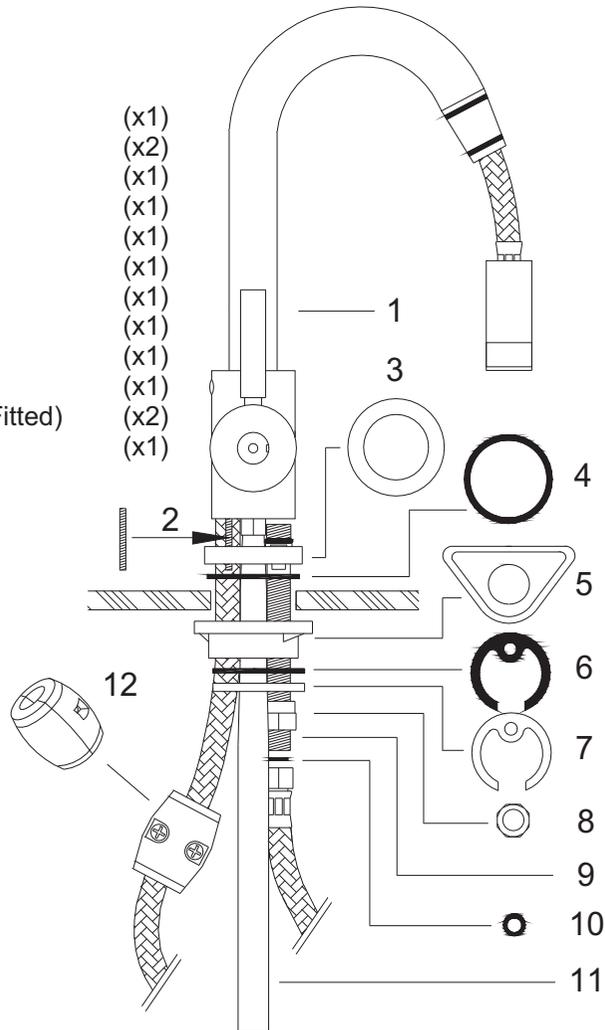


INSTALLATION

1. Identify all components and check for completeness, particularly before arranging fitting.
2. Screw locating studs (2) into mixer (1). Place plinth (3) and rubber washer (4) at the base of the mixer (1). Then position the base on the sink.
3. Offer up the triangular spacer (5), C-shaped rubber washer (6) and C-shaped metal washer (7), securing in position with nut (8) and (hollow) threaded rod (9).
4. Screw the tail pipes (11) into the mixer and connect the hot and cold supplies.
5. Connect the flexible hose to the hollow threaded rod (9) with the small washer (10) provided.
6. Fix the hose weight (12) to the flexible pipe.
7. Fully open both valves, letting them run for a few minutes to flush out the system and check all joints and connections for leaks.
8. See over the page for aftercare instructions.

CD VALVE



CLEAN WASHER AND SEAT



MAINTENANCE

If the fitting begins to drip

1. Turn off the water supply.
2. Prise out cap from handle, and unscrew handle screw and remove handle. Unscrew valve.
3. Carefully clean seating and rubber washer and ceramic disc.
4. Replace components, then turn on the water supply.
5. Contact our helpline if problem persists quoting the product code.