

# SHIRE

BUILT AROUND OUR REPUTATION



## PLEASE NOTE

Wood is a natural product and is therefore prone to changes in appearance, including some warping, movement and splitting, particularly during unusual climatic conditions (long hot or wet spells of weather). As a natural occurrence this is not covered by a guarantee.

## Assembly of Corner Arbour

### Tools Required

- Posidrive screwdriver (electric is best)
- Drill, 6mm drill bit
- Sandpaper (to smooth any rough edges)
- Tape measure
- Step ladder
- Pencil

## IMPORTANT!

PLEASE READ PRIOR TO ASSEMBLY OF THE BUILDING

EVERY PRECAUTION IS TAKEN TO ENSURE THAT YOUR BUILDING HAS NO ELEMENT INCORRECTLY PLACED OR POSSIBLY HAZARDOUS, HOWEVER PRIOR TO USE PLEASE CHECK ALL SURFACES FOR THE FOLLOWING:

- 1 RAISED GRAIN, SPLINTERS: sand down timber to smooth finish.
- 2 NAIL/SCREW/PIN HEADS PROUD: tap home to be flush with surface of timber.
- 3 DAMAGED SCREW HEADS: RESULTING IN SHARP SPLINTERS OF METAL: replace.
- 4 SHARP ENDS OF NAILS/ SCREWS/PINS PROTRUDING THROUGH THE PANEL: remove and reposition.
- 5 ENSURE ALL PARTS ARE SECURED AGAINST REASONABLE FORCE: remove and refit.
- 6 ENSURE THERE ARE NO LOOSE PARTS: remove and refit/discard.

**WE RECOMMEND THAT PROTECTIVE GLOVES BE WORN THROUGHOUT**

NOTE: ASSEMBLY INSTRUCTIONS SHOW PANEL 'A' WITH SHIPLAP BOARDING. ACTUAL PANELS ARE BOARDED WITH TONGUE AND GROOVED MATCHING.

## Preparation of Base

We recommend that the base onto which your building will stand should be at least 75mm larger in each direction than the total floor size of the building.

Actual floor area of the building: 1250 x 1250mm

Total height clearance: 2500mm

The chosen position in your garden for the siting of the building should be excavated to a depth of 75mm to allow a base of sand, on to which paving slabs can be evenly laid - **THEY MUST BE LEVEL AND FIRM.**

## Treatment/Care of your Garden Building

Treat with a suitable decorative wood finish immediately. We recommend that all timber pieces be treated again prior to assembly and again within 3 months of assembly. We further recommend that all pieces are treated again at least annually or as frequently as the instructions on the product used recommends.


We would suggest that all wall panels be treated in an upside-down position to allow the finish/treatment to ingress into the tongue and groove jointing.

We would also remind you that you would rarely (if ever) be able to re-treat the underside of the floor following assembly. We strongly recommend that the underside of the floor is treated an absolute minimum of twice (not including pre-treatment).

**Garden buildings are not waterproof, therefore on assembling building we recommend using a silicon based sealant between wall panels and between wall panels and floor.**

## Parts List


PLEASE LAY OUT PARTS AND CHECK OFF AGAINST CHECK LIST BELOW:

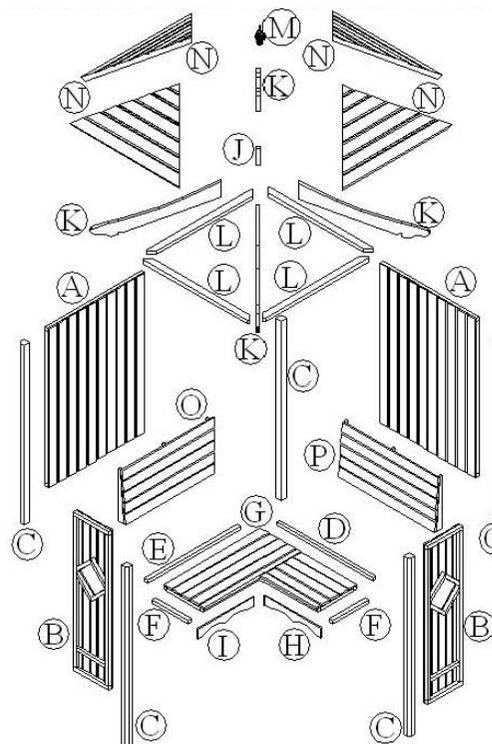

EXPLODED VIEW OF PANELS



### QTY DESCRIPTION

QTY	DESCRIPTION	Label
2	Back Panels - 1583 x 1118 mm	A
2	Side Panels - 1583 x 408 mm	B
5	Corner Posts - 65 x 65 mm (Bevelled)	C
1	Seat Panel Support - 34x34x1118 mm	D
1	Seat Panel Support - 34x34x1084 mm	E
2	Seat Panel Supports - 34x34x420 mm	F
1	SeatPanel	G
1	Seat Facia - 653mm Long	H
1	Seat Facia - 645mm Long	I
1	Roof Bearer Centre Piece - 34x34x165	J
4	Roof Bearers	K
4	Roof Braces	L
1	Roof Finial	M
4	Roof Panels	N
1	Seat Back - Left Hand	O
1	Seat Back - Right Hand	P

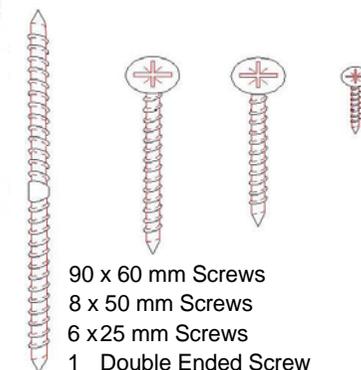


- 90 x 60 mm Screws
- 8 x 50 mm Screws
- 6 x 25 mm Screws
- 1 Double Ended Screw




ASSEMBLE ON LEVEL SURFACE

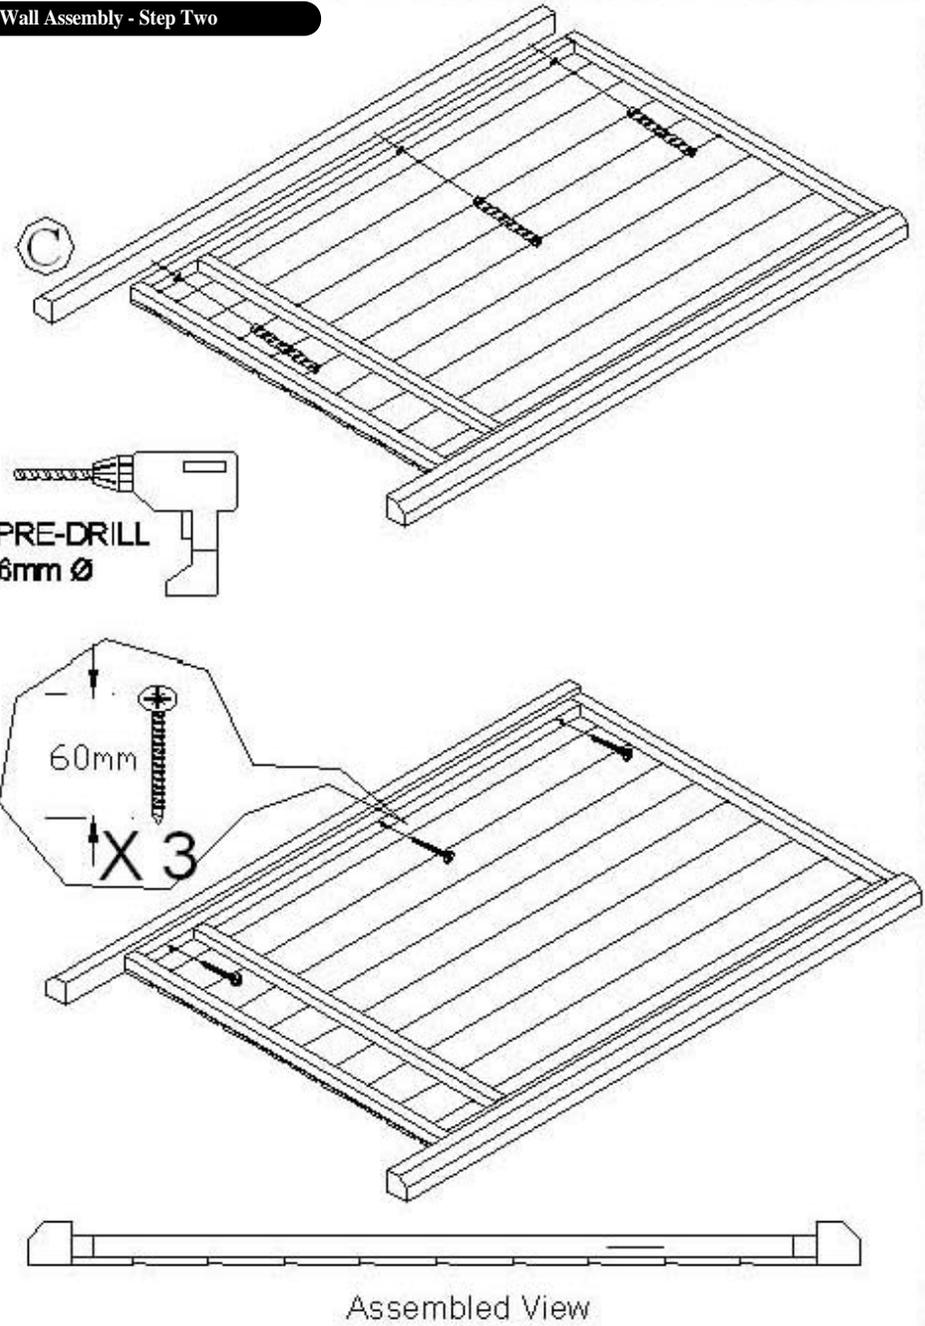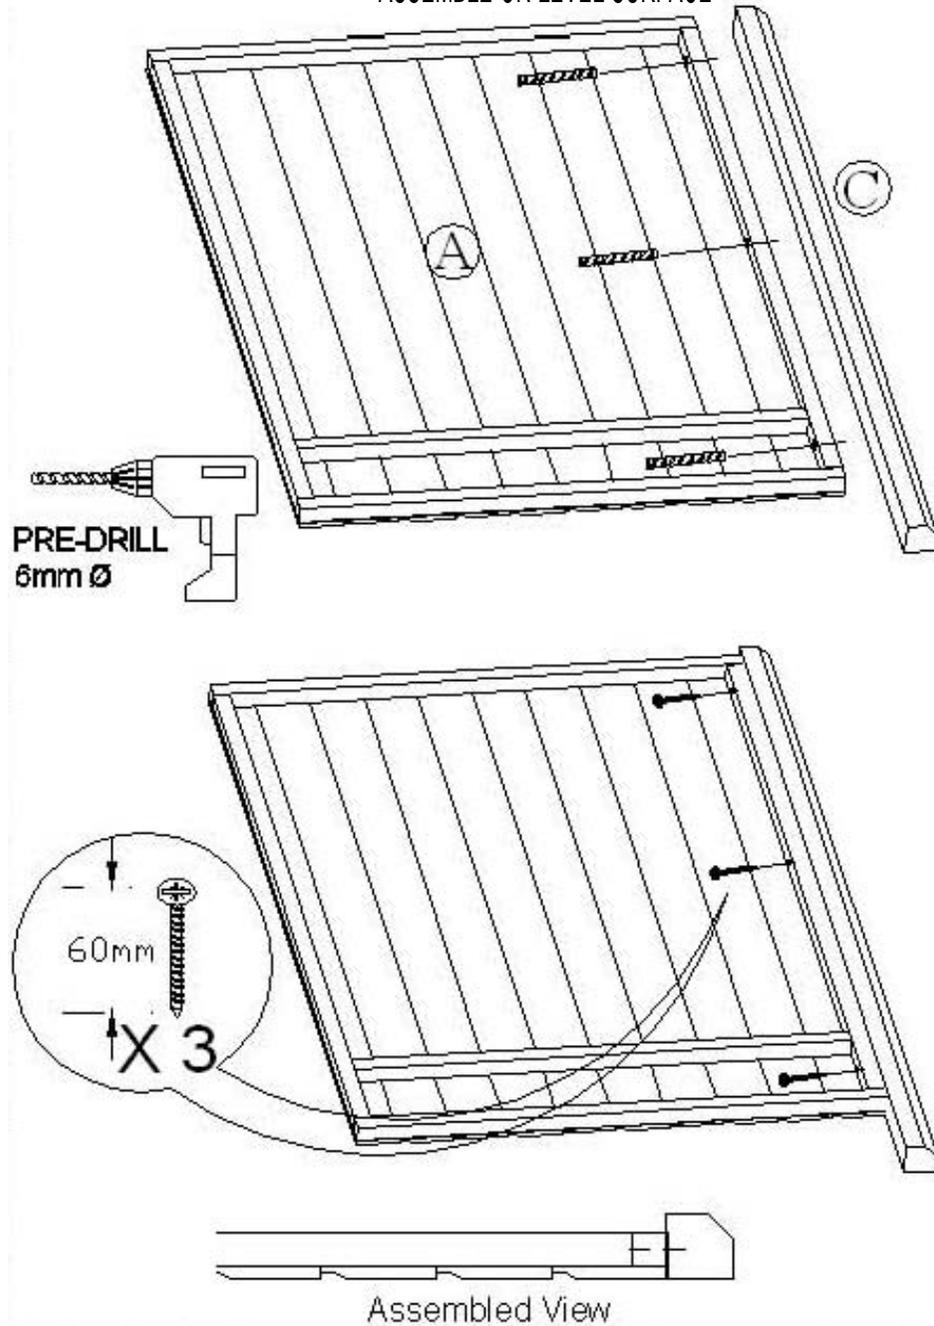



TURN COMPLETED ASSEMBLY OVER







A - Wall Assembly - Step Three

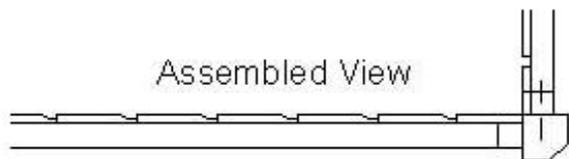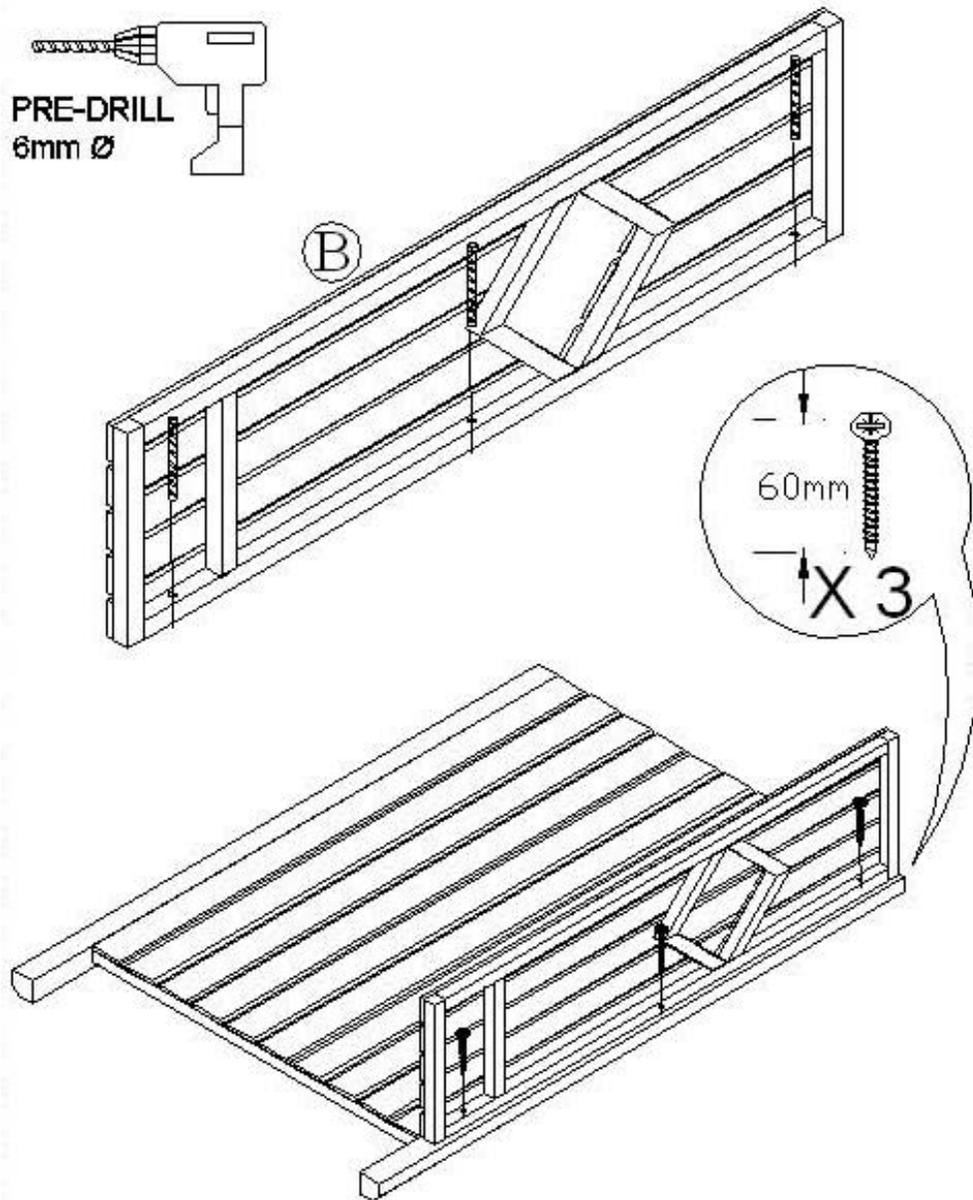

A - Wall Assembly - Step Four

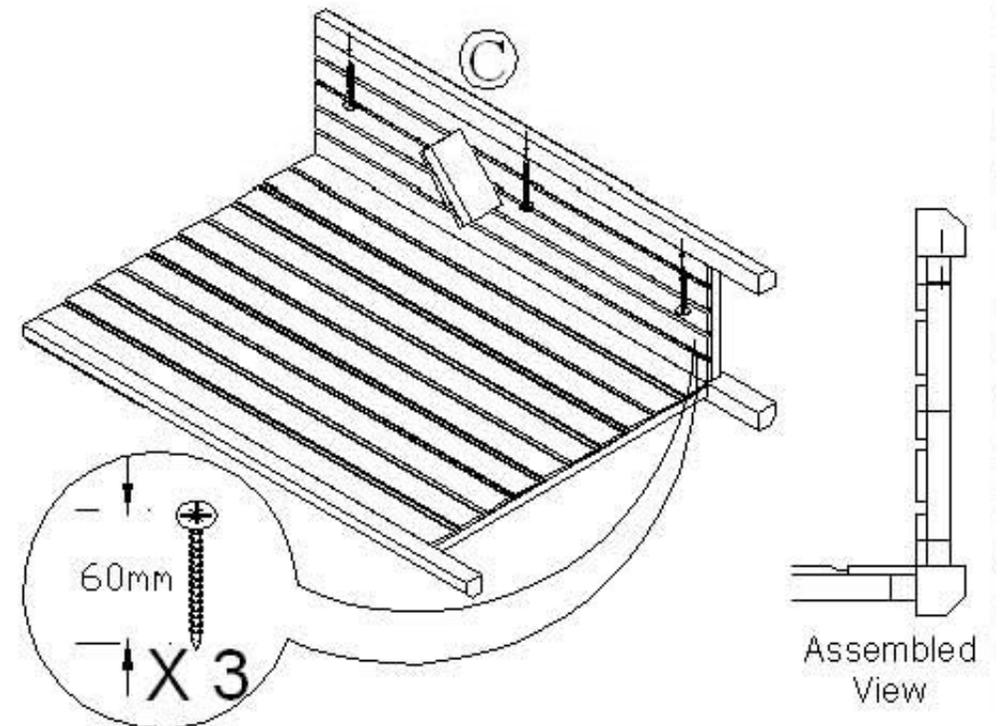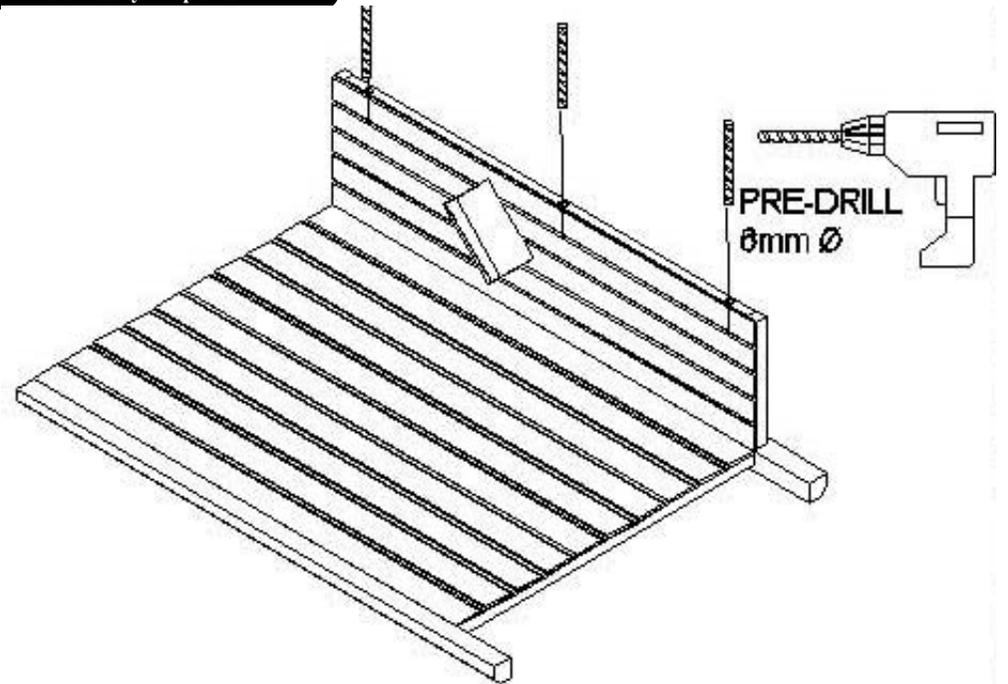





A - Wall Assembly - Step Five

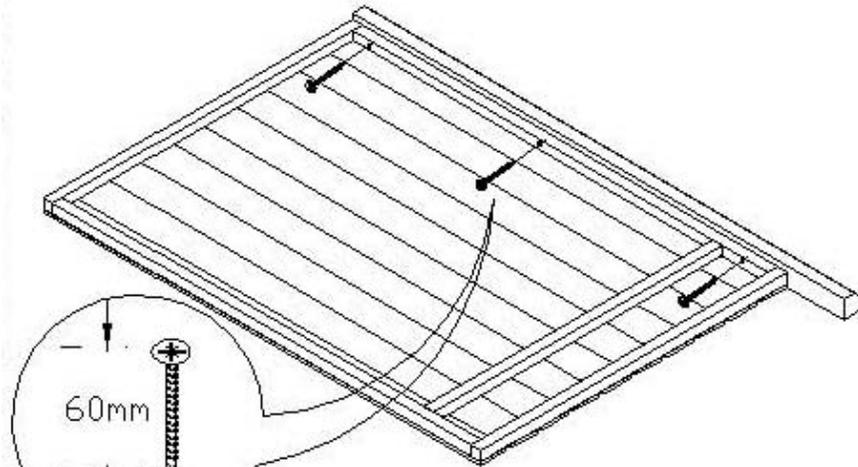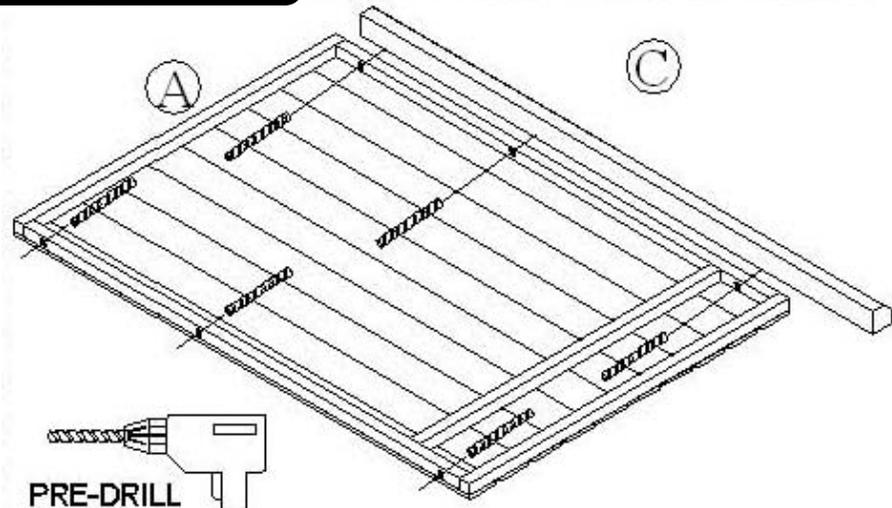

Assembled View


TURN COMPLETED ASSEMBLY OVER

A - Wall Assembly - Step Six

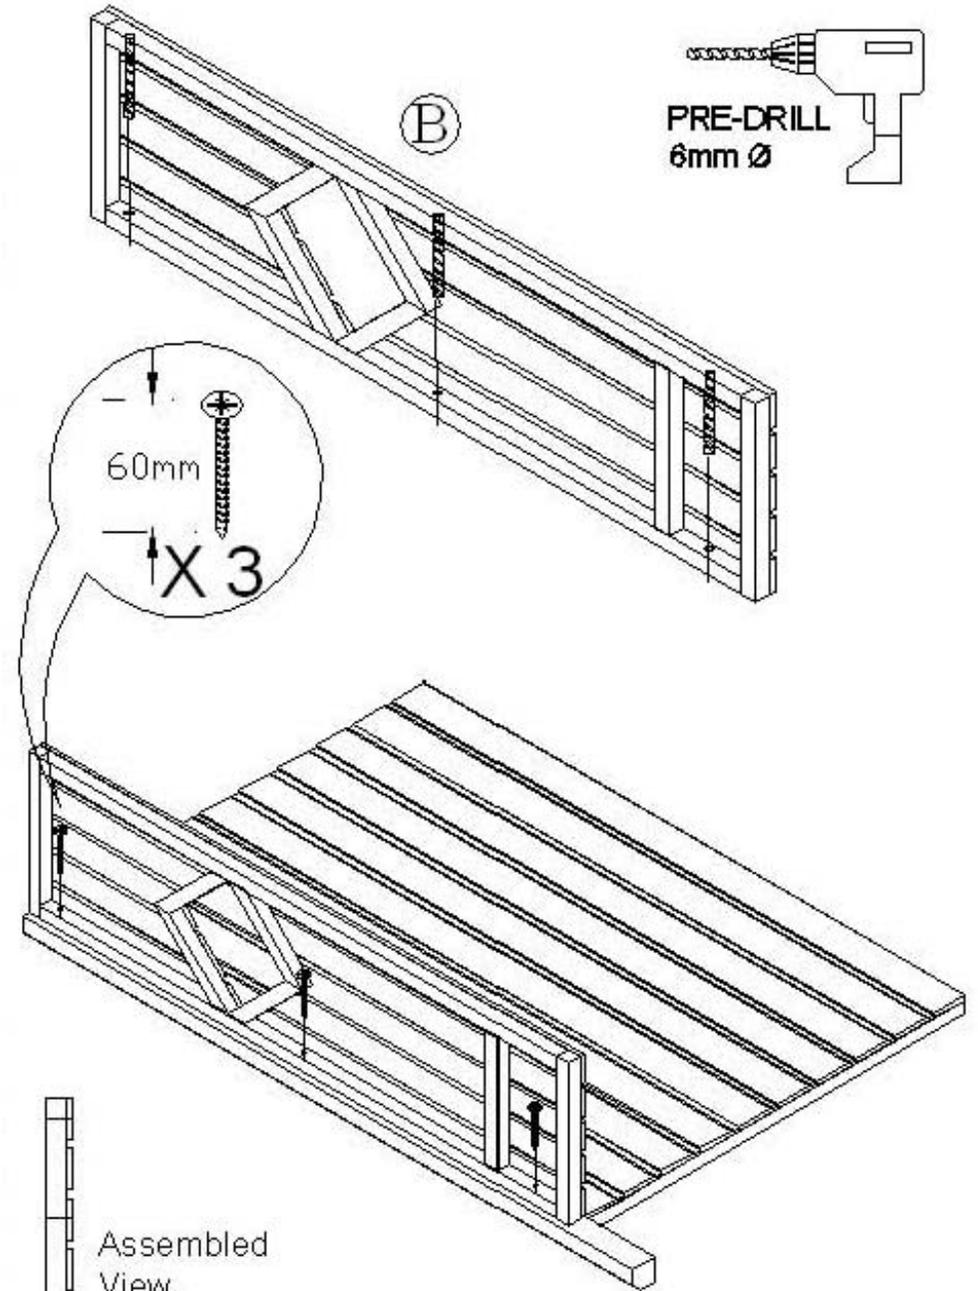


Assembled View

A - Wall Assembly - Step Seven


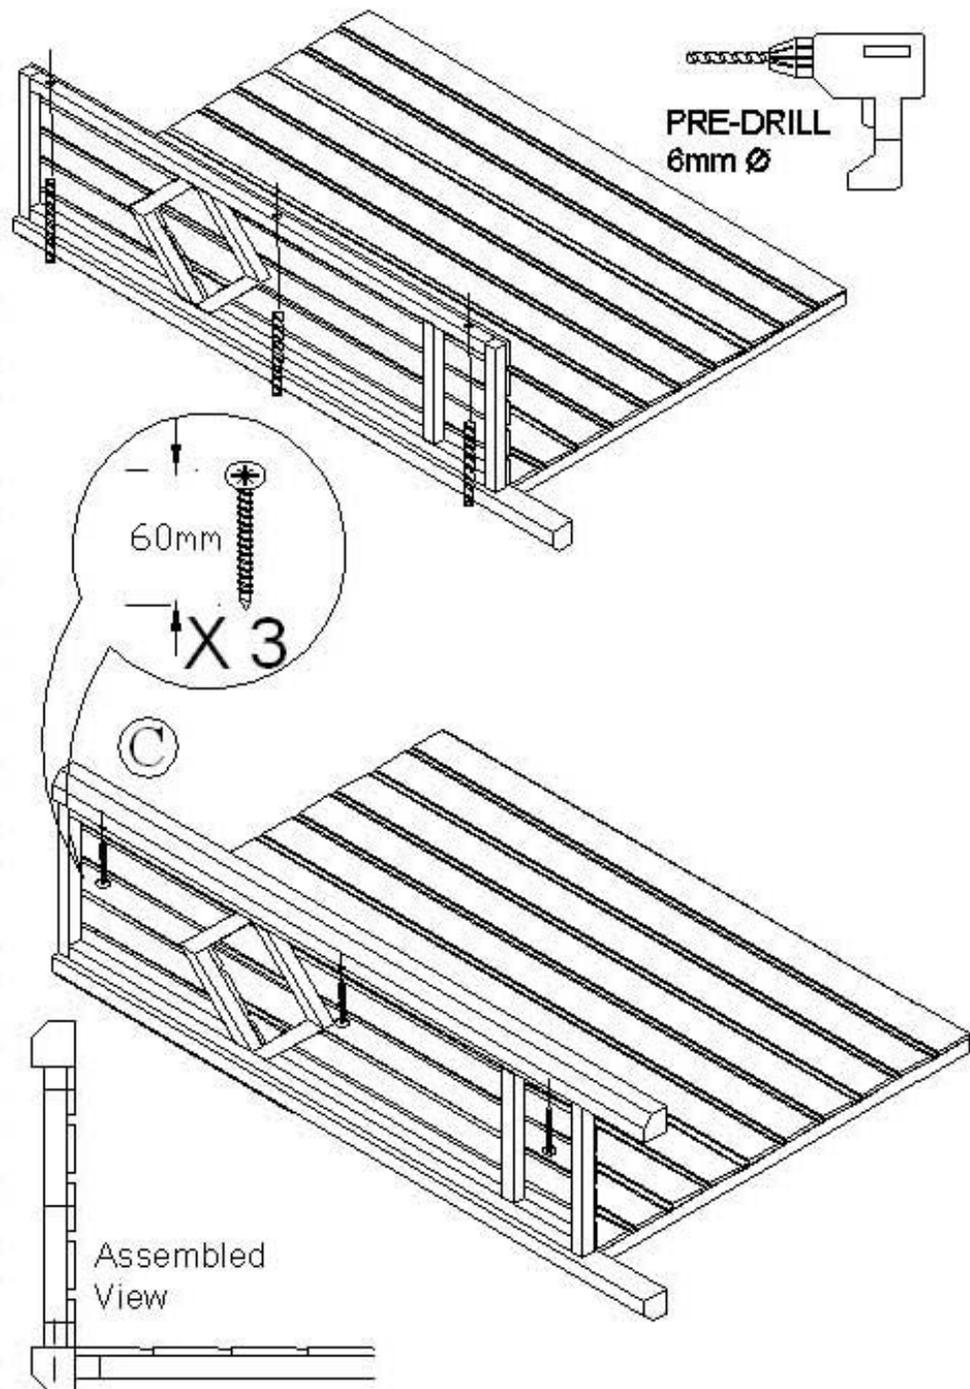


A - Wall Assembly - Step Eight


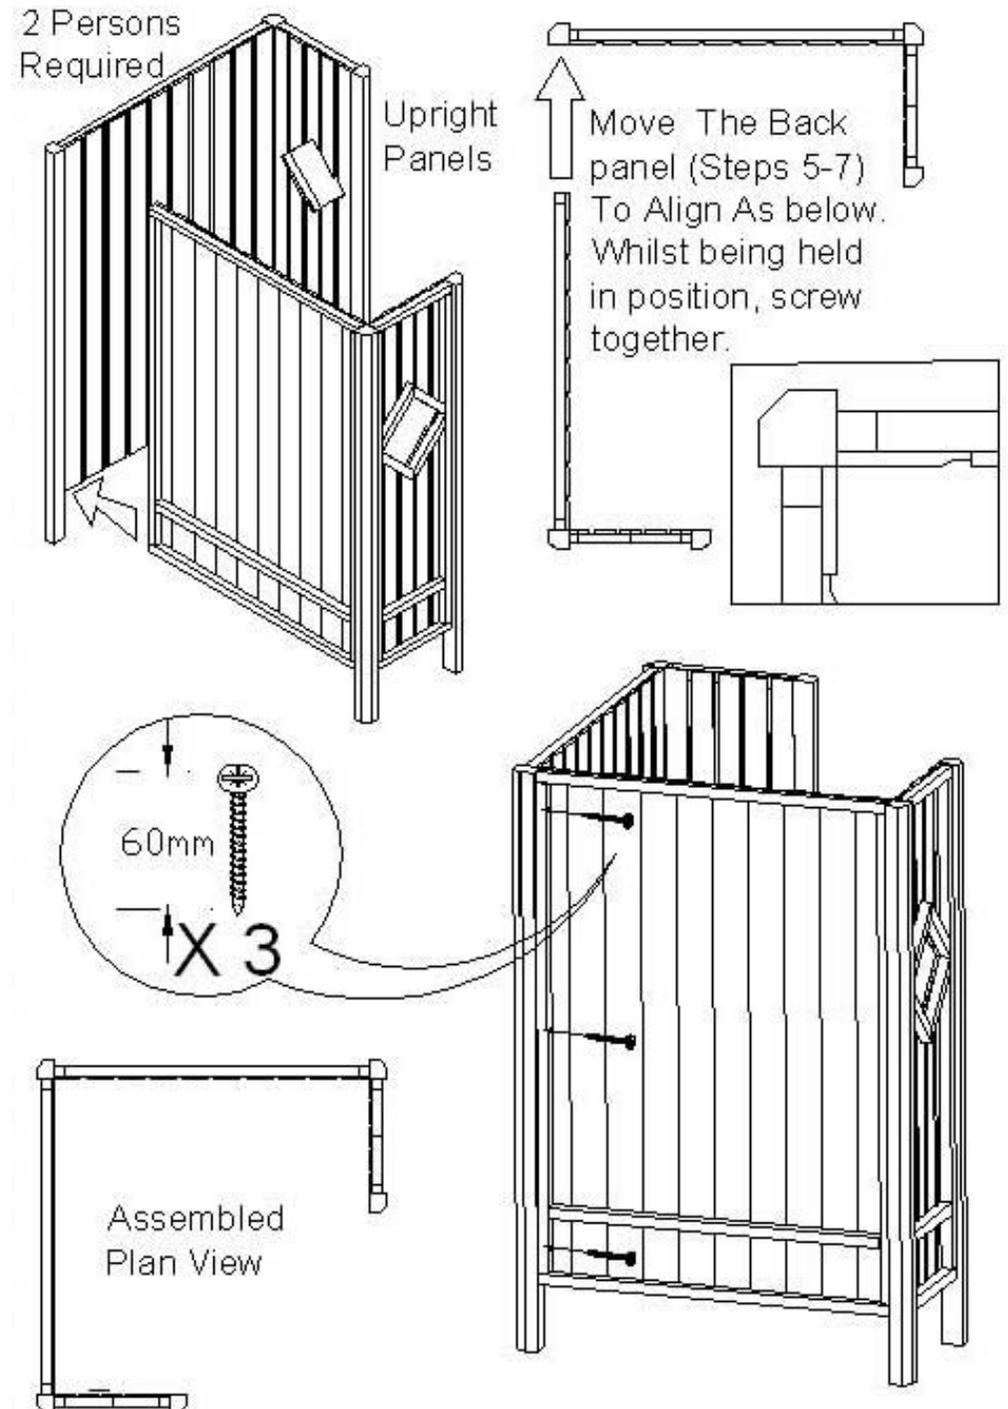






B - Seat Assembly - Step Three

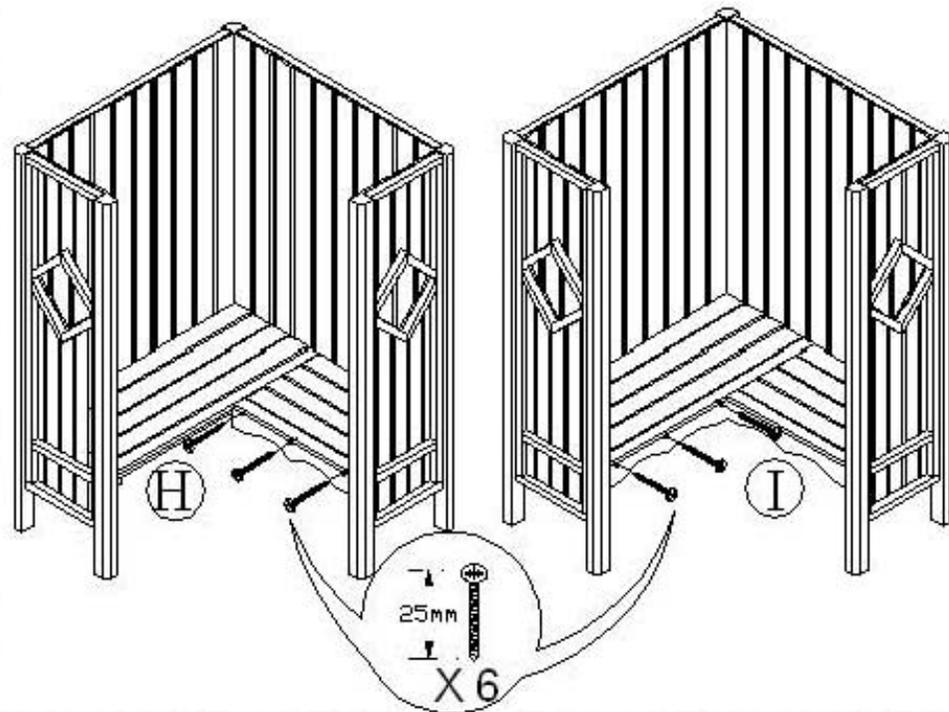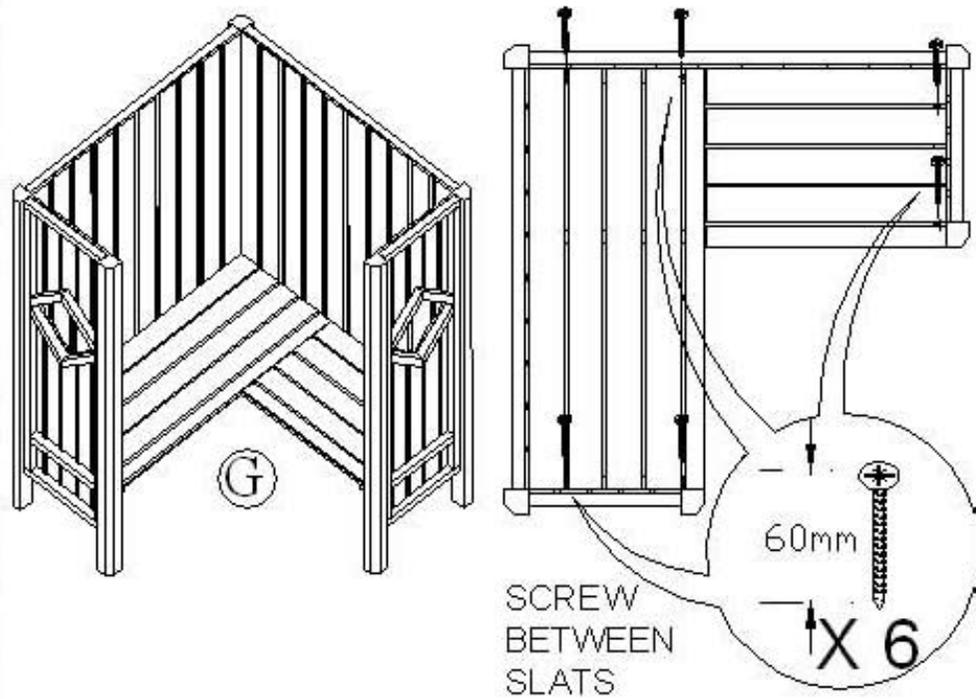



B - Seat Assembly - Step Four

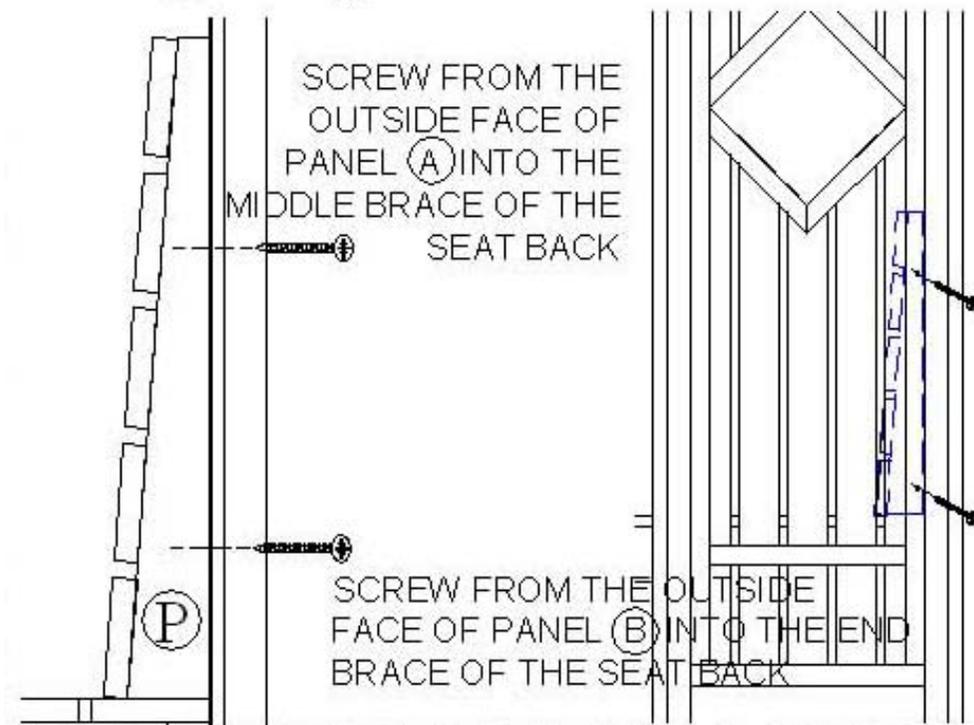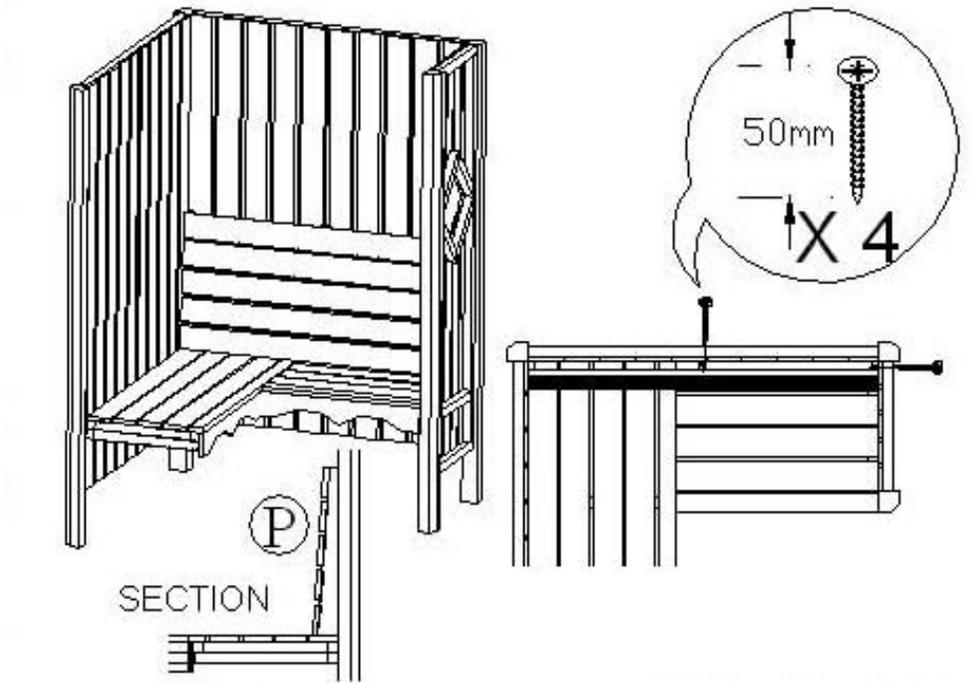




B - Seat Assembly - Step Five

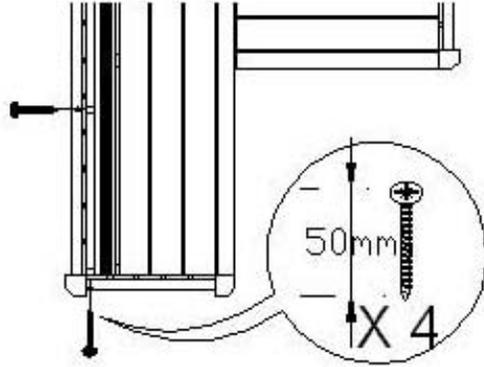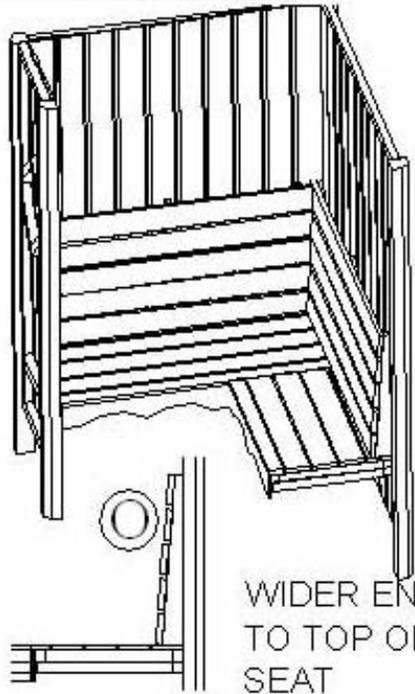

SCREW FROM THE OUTSIDE FACE OF PANEL (B) INTO THE END BRACE OF THE SEAT BACK

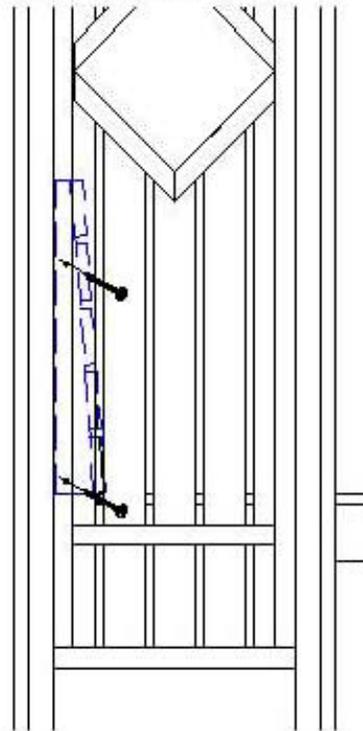
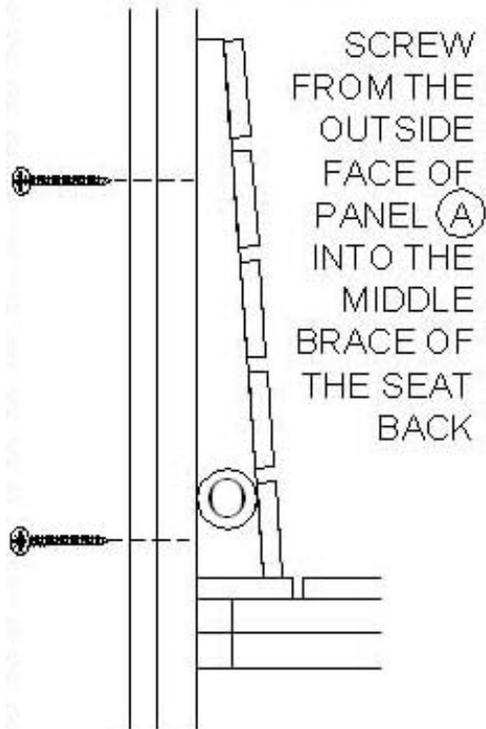


C - Roof Assembly - Step One

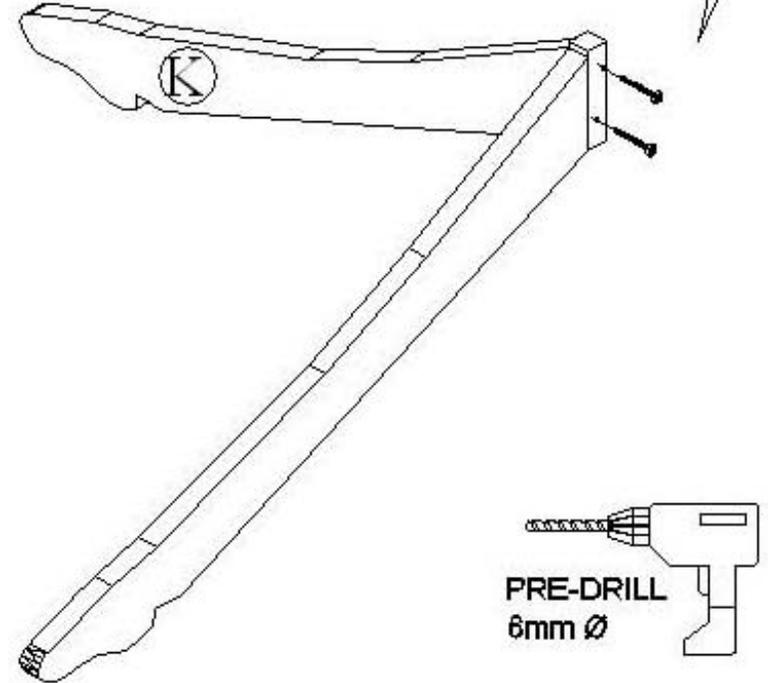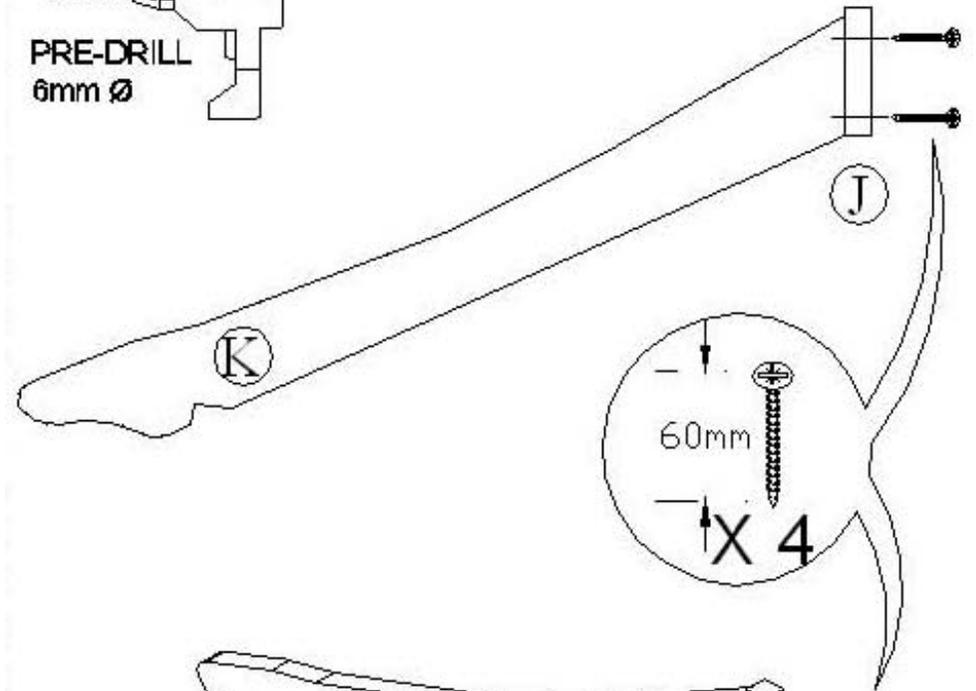





C - Roof Assembly - Step Four

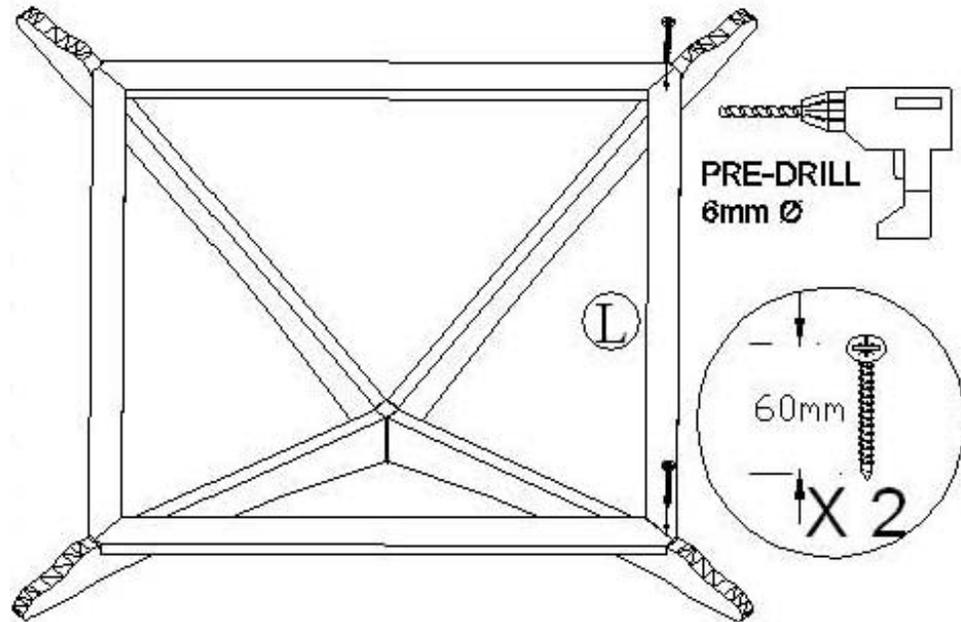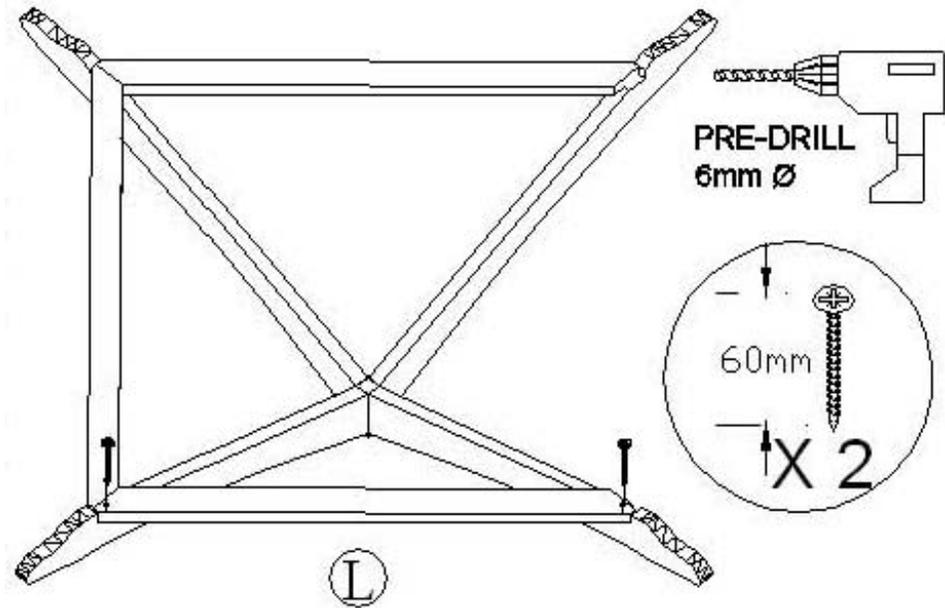


C - Roof Assembly - Step Five

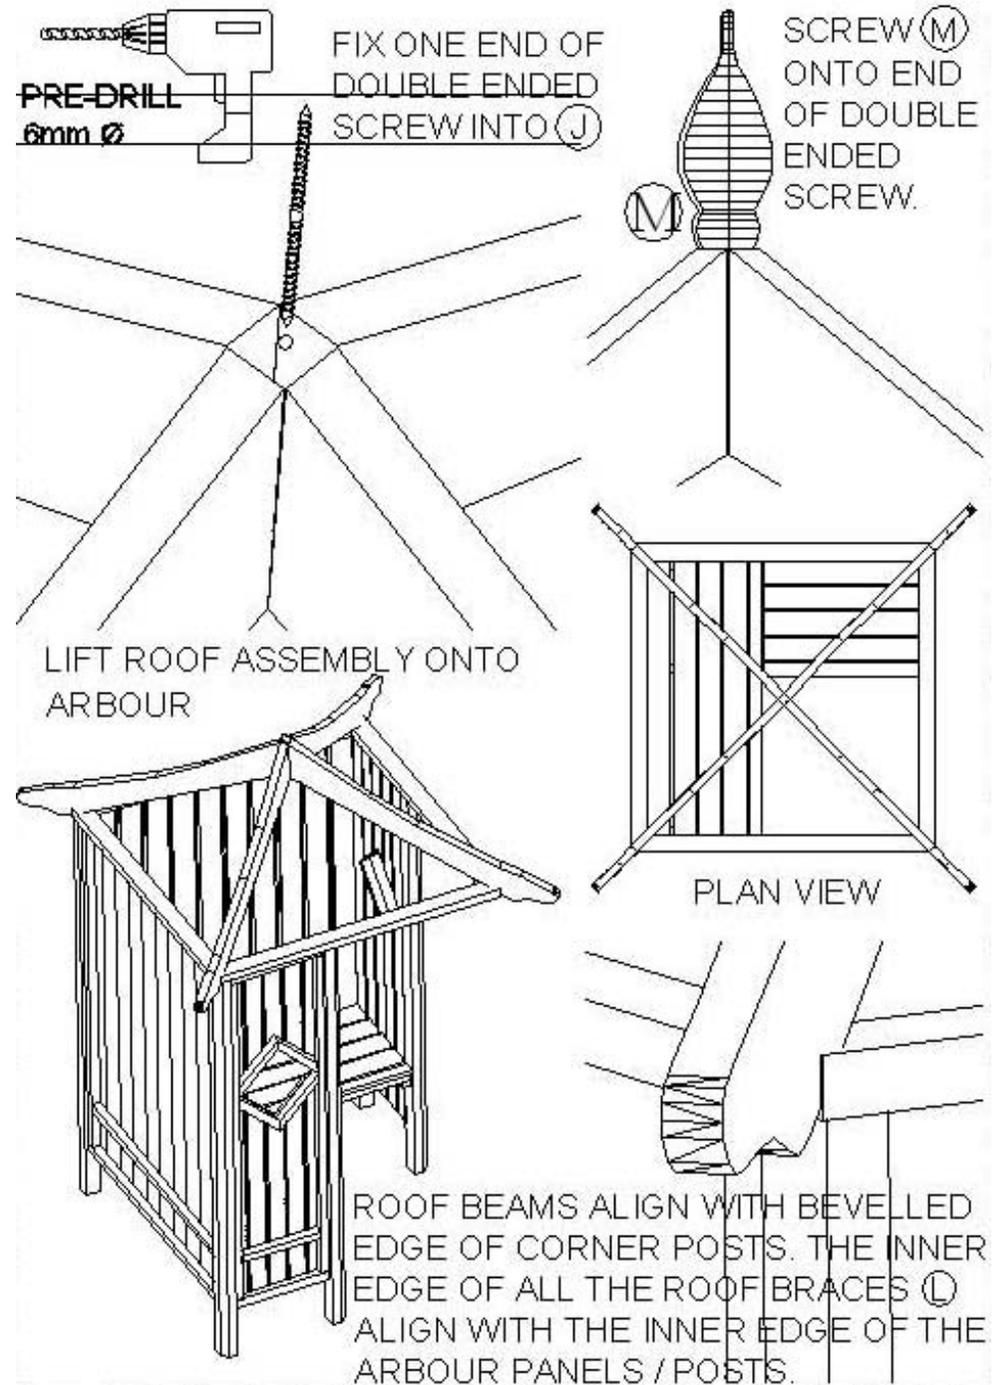

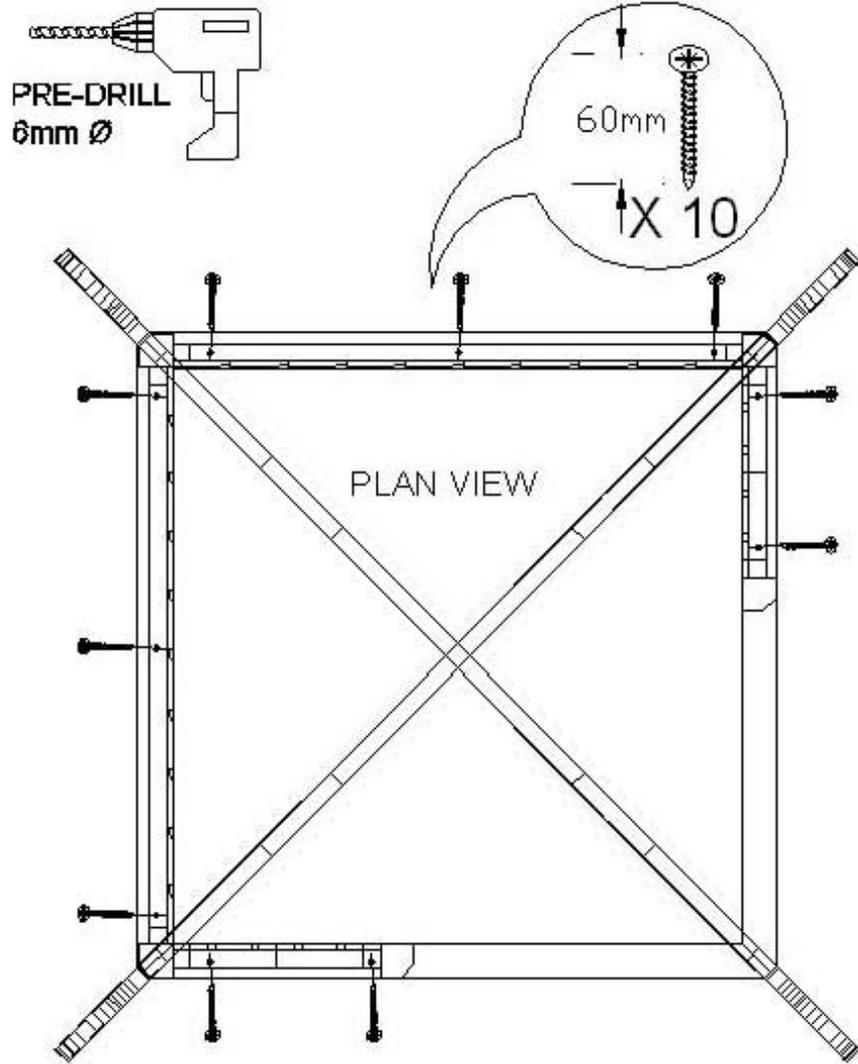


FROM ABOVE SCREW DOWN ROOF BRACES (L)  
INTO THE TOP FRAMEWORK OF PANELS (A) & (B)


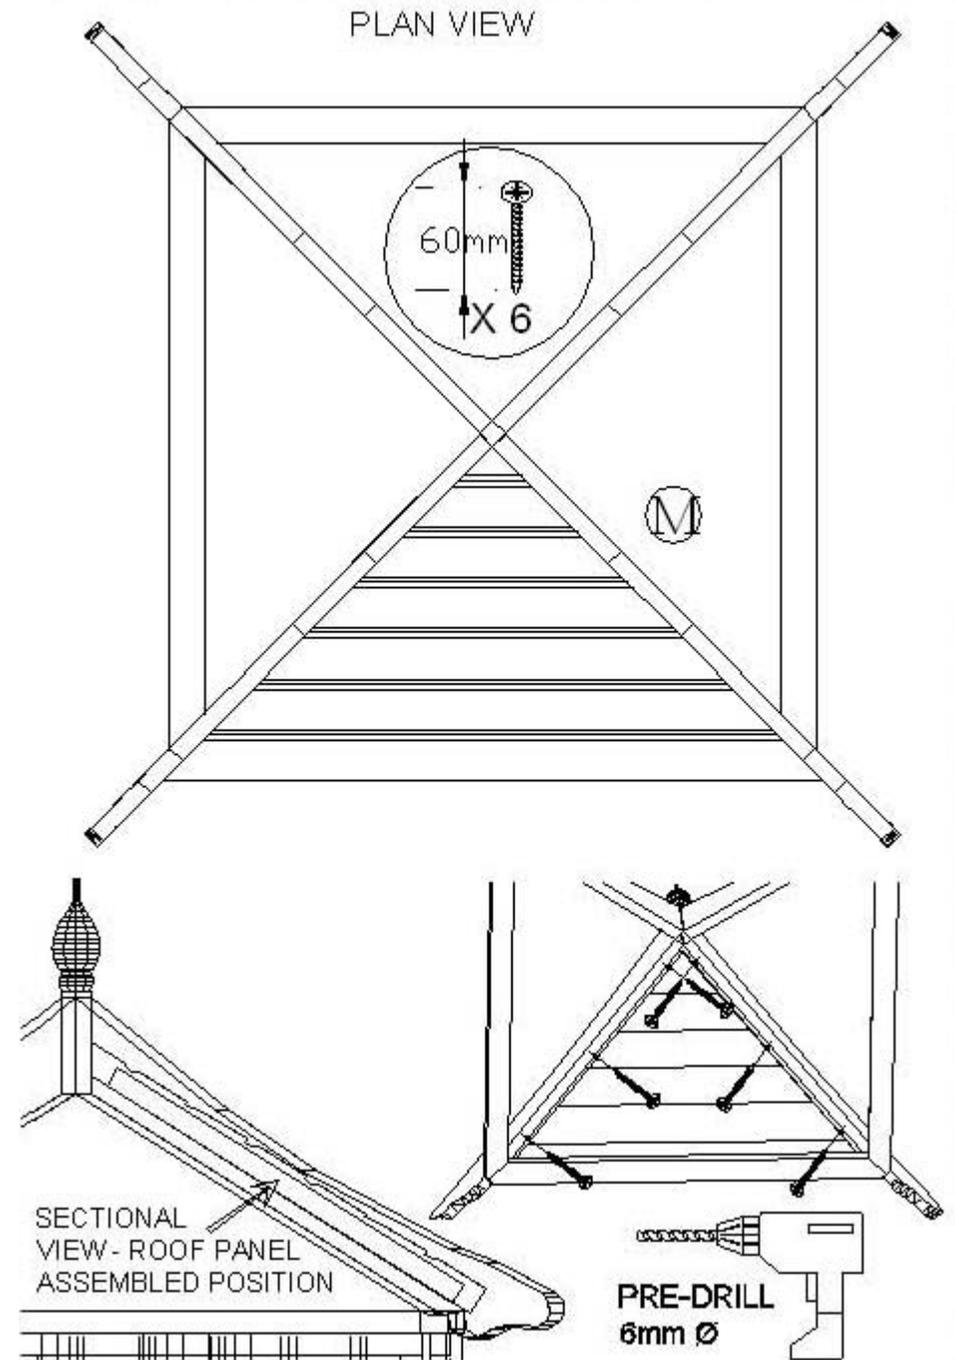


REPEAT FOR OTHER THREE ROOF PANELS


PLAN VIEW

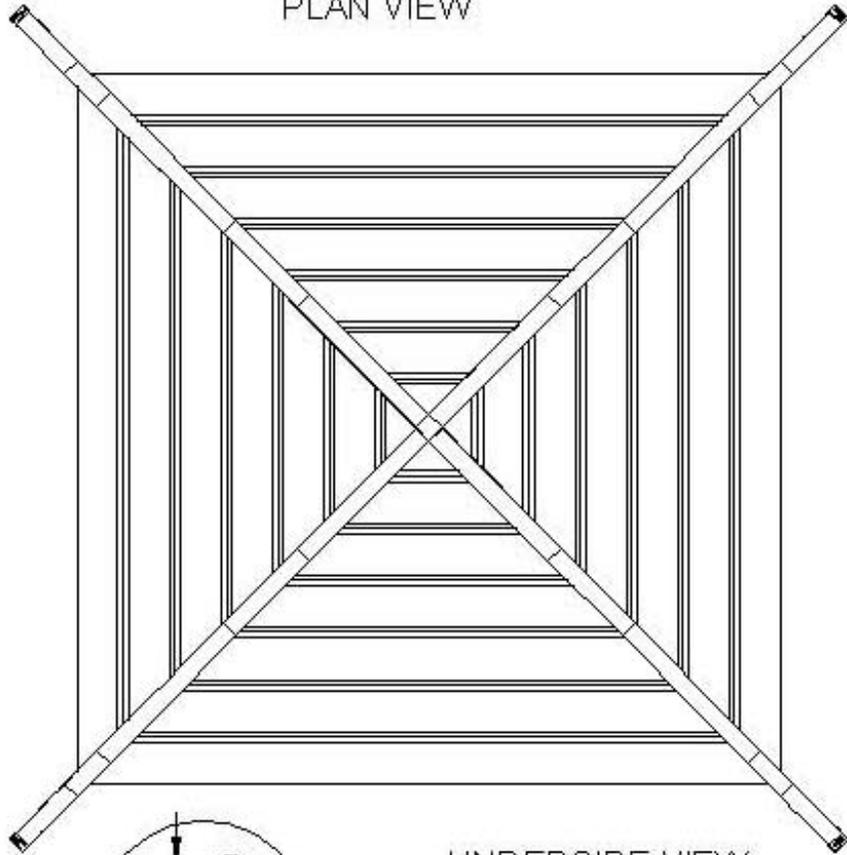

UNDERSIDE VIEW

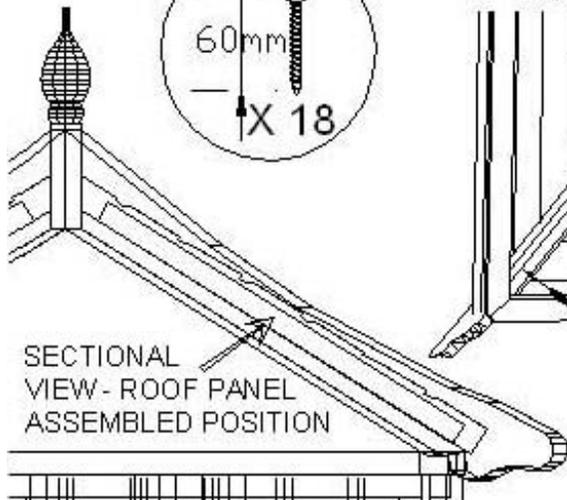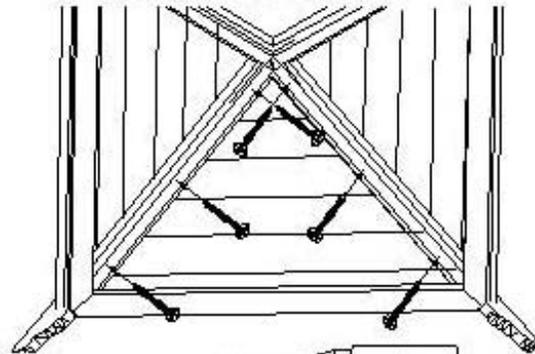

SECTIONAL VIEW - ROOF PANEL ASSEMBLED POSITION



PRE-DRILL  
6mm Ø

# COMPLETION CHECKLIST

- 1 Check and ensure that no raised grain or splinters are evident on timber components. Sand down any raised grain or splinters using fine grade sandpaper.
- 2 Check that all screw, nail and pin heads are properly tapped home and are not proud of the timber surface.
- 3 Check and ensure that no screws, nails or pins protrude through any panel.
- 4 Check and ensure that all parts are properly secured against reasonable force.