


| Item | Description              | Qty |
|------|--------------------------|-----|
| 1    | Tap Body & Valve         | 1   |
| 2    | Washer (Anti-Rotational) | 1   |
| 3    | Rubber Horseshoe Washer  | 1   |
| 4    | Horseshoe Washer         | 1   |
| 5    | Copper Pipe              | 2   |
| 6    | Threaded Stud            | 1   |
| 7    | Fixing Nut               | 1   |

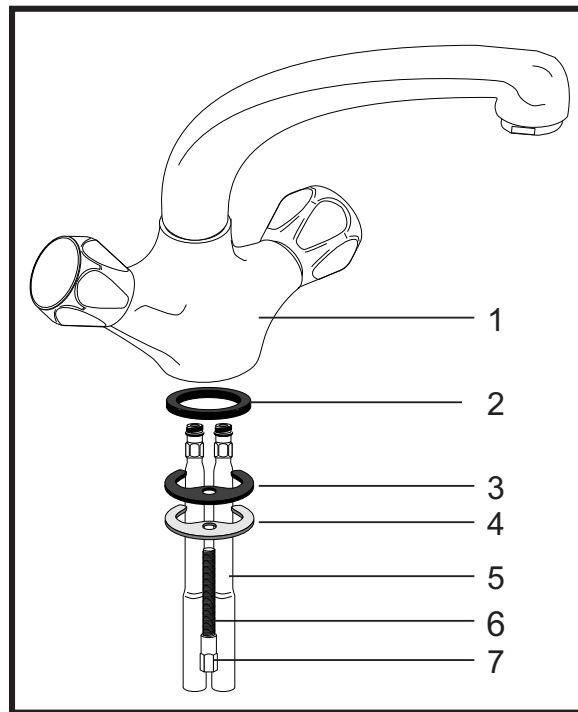

## Fitting Instructions

### Single Lever Monobloc Sink Mixer Tap

- 1 Screw 2x copper pipes (5) into tap body (1).
- 2 Fit threaded stud (6) by inserting into hole in tap body and tightening as far as possible by hand.
- 3 Fit anti-rotational washer (2) to tap by pushing into recessed ring in underside of tap body and locate the tap assembly down through hole in the sink.
- 4 Fit rubber horseshoe washer (3) onto threaded stud (6). Fit horseshoe washer (4) onto threaded stud (6). Now fit tightening nut (7) onto threaded stud (6). Do not over tighten.
- 5 Cut back and bend the 15mm pipes as necessary and connect to the water supply using suitable plumbing joints.
- 6 Turn on the mains water supply and re-fill the system, check immediately for leaks. It is advisable at this stage to flush out the system. To do this open both valves fully and allow water to flow for approximately 1 minute. This will remove any foreign matter within the tap body.
- 7 Finally turn on all water heating arrangements.

### Before you start

This mixer is suitable for use at water supply pressures of 0.1 bar (min.) to 7 bar (max.).

If the tap is installed into a low pressure (tank fed) system, the minimum height from the outlet of the nozzle to the underside of the water tank should be at least 1.8 metres to ensure adequate performance.

This product must be connected to the water supply in accordance with the Water Supply (Water Fittings) Regulations 1999, and also to comply with the UK Building Regulations. If you are in any doubt about these requirements contact a qualified plumber, your local Water Company, or the Water Regulations Advisory Service (WRAS).

- (a) Identify all components and check pack contents.
- (b) **Turn off mains water supply.** The mains stopcock is usually situated where the the supply enters the building.
- (c) It is also recommended that the water heating arrangements are turned off.
- (d) Drain the cold and hot water system. It is recommended to ensure complete drainage, that all taps are open. There is no need to drain the heating system.

### After Care

To maintain the appearance of this fitting, ensure it is cleaned only using a clean soft damp cloth. A solution of warm water and mild liquid detergent may be used where necessary and then rinsed thoroughly. Abrasive cleaners or acidic cleaners **MUST NOT BE USED** under any circumstances. Avoid contact with solvents.