


ITEM	DESCRIPTION	QTY
1	TAP BODY	1
2	COVER FLANGE	1

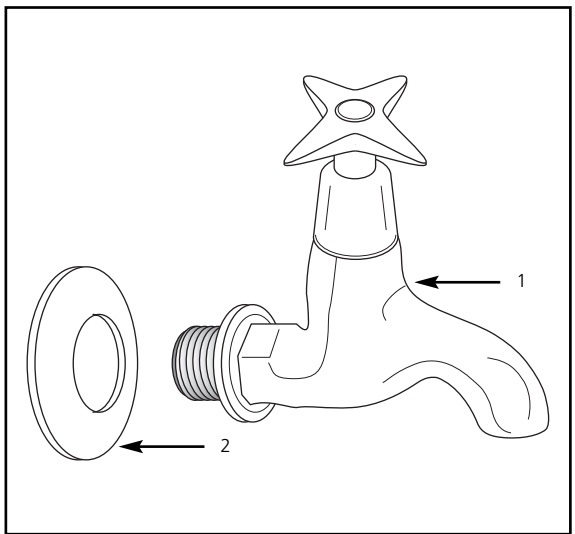

UNIVERSAL FITTING INSTRUCTIONS

Bib Tap

BEFORE YOU START

This tap is suitable for use at water supply pressures of 0.1 bar (min) to 7 bar (max).

If the tap is installed into a low pressure (tank fed) system, the minimum height from the outlet of the nozzle to the underside of the water tank should be at least 2 metres to ensure adequate performance.

This product must be connected to the water supply in accordance with the Water Supply (Water Fittings) Regulations 1999, and also to comply with UK Building Regulations. If you are in any doubt about these requirements, contact a qualified plumber.

- Identify all components and check pack contents.
- TURN OFF WATER MAINS SUPPLY.** The mains stopcock is usually situated where the supply enters the building.
- It is also recommended that the water heating arrangements are turned off.
- Isolate the hot and cold water supply.

INSTALLATION

- Apply a suitable approved sealing material over external thread and fit Cover Flange (2) over thread (This may not be required).
- Screw Tap Body (1) into fixing location. Ensure tap is located in correct position.
- Turn on the hot and cold and mains water supply. Check for leaks immediately. It is always advisable at this stage to flush out the system. To do this, open both valves fully and allow water to flow for approx. 1 minute. This will remove any foreign matter within the installation.
- Finally turn on all the water heating arrangements.

AFTER CARE

To maintain the appearance of this fitting, ensure it is cleaned only using a clean soft damp cloth. A solution of warm water and mild liquid detergent may be used where necessary and then rinsed thoroughly. Abrasive cleaners or acidic cleaners **MUST NOT BE USED** under any circumstances. Avoid contact with solvents.