

GUARDIAN FLOODLIGHT

LFSX-XD5



TECHNICAL SPEC:

Non-Replacable Light Source

The light source contained in this luminaire is not replacable, at the end of life the luminaire shall be destroyed



Part NO	Wattage	Useful Lumens	Luminaire Lumens	Suggested Mounting Height	Suggesed Halogen equivalent	Weight	Dims (mm)	Max Projected Area	SFX Code
LFS10x130	10W	970	1050	2.5-3.0M	100W	0.32kg	119x94x95	0.014m ²	714KJ
LFS10x150	10W	1050	1200	2.5-3.0M	100W	0.32kg	119x94x95	0.014m ²	152KJ
LFS20x130	20W	1930	2200	2.5-4.0M	200W	0.385kg	131x110x95	0.017m ²	666KJ
LFS20x150	20W	2100	2400	2.5-4.0M	200W	0.385kg	131x110x95	0.017m ²	820KJ
LFS30x130	30W	2650	3000	3.0-5.0M	300W	0.45kg	148x121x95	0.022m ²	569KJ
LFS30x150	30W	2750	3150	3.0-5.0M	300W	0.45kg	148x121x95	0.022m ²	479KJ
LFS50x150	50W	4600	5400	4.0-6.0M	500W	0.68kg	185x151x95	0.045m ²	



x: Stand for the colour of the product. It could be B/W.

This product range is designed for domestic outdoor use. Not suitable for interior use. If outdoor connection is required, use a suitably IP rated junction box and terminals. Glands used must be suitable for H05RN-F cable as supplied with the luminaire. The Floodlight is pre-wired with 1.0M of H05RN-F 3*1.0mm² cable, The external flexible cord or cable of this luminaire cannot be replaced; if the cord is damaged, the luminaire shall be destroyed.

NOTE - To comply with regulations, installation must be carried out by suitably qualified competent person and in accordance with the current IEE Wiring Regulations (BS7611) and Building Regulations. A copy of the instructions must be left for the user/ maintenance engineer for the future reference.

For non-UK, please refer/consult local requirements


ENSURE ELECTRICAL SUPPLY IS DISCONNECTED/ ISOLATED BEFORE COMMENCING INSTALLATION

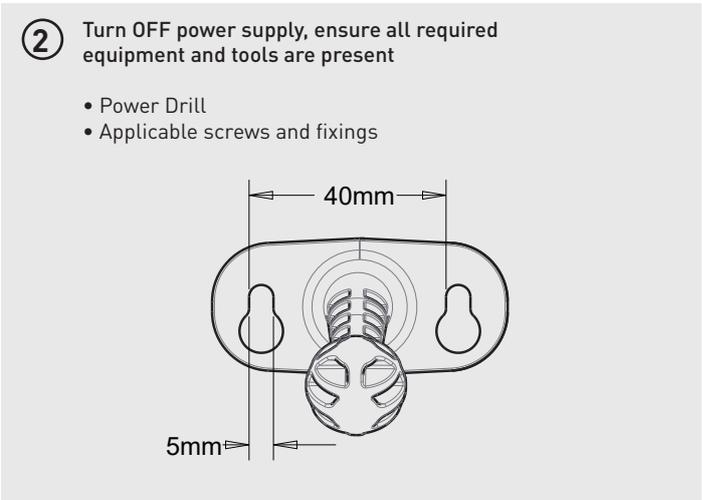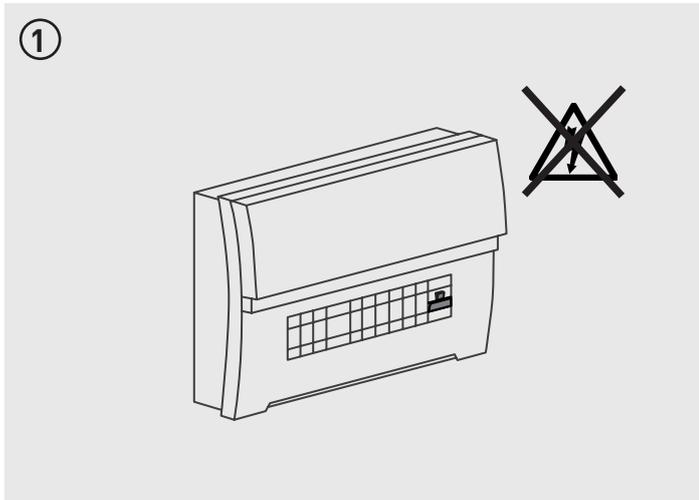


② Turn OFF power supply, ensure all required equipment and tools are present

- Power Drill
- Applicable screws and fixings

- 3** With a suitable mounting position identified, loosen main fixing bolt on the rear of the housing and tilt to allow access to fixing holes.

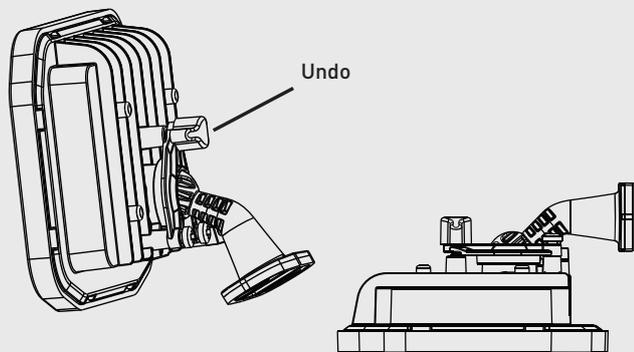

- 4** Fit floodlight to the wall using suitable fixings. Tilt and rotate floodlight to desired angle and securing fixing bolt. Ensure product is secure.

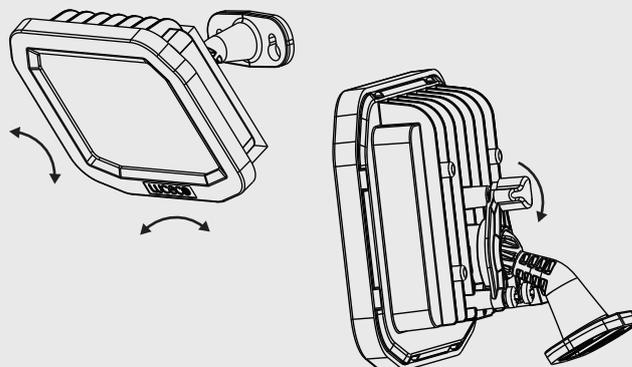

- 5** Connect the pre-wired cable to the electrical supply, observing the correct polarity.




Note - Cables must be grounded

LIVE = BROWN

NEUTRAL = BLUE

EARTH = YELLOW/GREEN

- 6** When connections are safe. re-istate power.

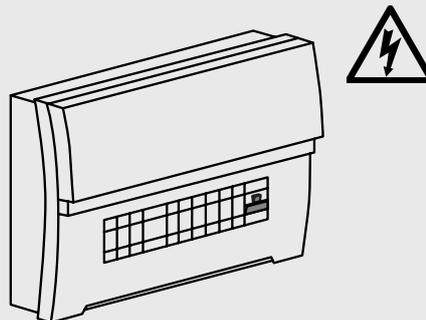

United Kingdom Warranty

For other territories and for further information, please see www.luceco.uk for details

Products are protected by warranty for a period of 3 years from date of purchase against defects in material and workmanship (unless otherwise stated). Should a product fail to perform as described within the warranty period it will be repaired or replaced with the same or equivalent product by Luceco, free of charge provided that you: (1) return the product to us with shipping charge prepaid, (2) provide us with proof of the original date of purchase and (3) quote our return authorization number.

Repaired or replaced products will be returned to you with shipping charges prepaid. Replacement products may be refurbished or contain refurbished materials. In our sole discretion, we are unable to repair or replace a defective product, we will refund the purchase price of the product.

This warranty will not apply if in our judgment, the product fails due to damage in shipment, handling, storage, accident, abuse or misuse, or if it has been used in a manner not conforming to our product instructions, has been modified in any way, or has any serial number removed or defaced. Repair or attempted repair will void this warranty. Our maximum liability under the terms of this warranty is limited to the purchase price of the product covered by the warranty.

The warranty is given under English Law. If any part of this warranty is deemed unenforceable (including any provision in which we exclude our liability to you) the enforceability of any other parts of the warranty will not be affected. These terms do not reduce your statutory rights.

For Non-UK please contact Local Luceco Office for details. THESE TERMS AND CONDITIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

Eventually, you may want to replace this fitting;

Environmental Protection W.E.E.E (Wheelie Bin Symbol for EU ONLY)

This symbol is known as the "crossed-out" wheelie Bin Symbol". When this symbol is marked on a product or battery, It means that it should not be disposed of with your general household waste. Some chemicals contained within electrical/electronic products or batteries can be harmful to health and the environment. Only dispose of electrical/electronic/battery items in separate collection schemes, which cater for the recovery and recycling of materials contained within. Your co-operation is vital to ensure the success of these schemes and for the protection of the environment.



Tech Help Line

UK - **0330 0249 279**

Non UK - **+44 (0)1952 238 100**

Supplied by LUCECO

Stafford Park 1, Telford, Shropshire,
England, TF3 3BD

Kontakt

UK - **0330 0249 279**

Non UK - **+49 40 89066 878 - 29**

Geliefert von Luceco GmbH

Holstenplatz 20b,
22765 Hamburg DEUTSCHLAND

Support Technique

UK - **0330 0249 279**

Non UK - **+33 (0)1 61 10 10 35**

Notice fournie par

Luceco SAS France & Belux 3
Rue de Courtalin, Magny Le Hongre 77700
FRANCE & BELUX

Servicio de asistencia telefónica

UK - **0330 0249 279**

Non UK - **+34 93 829 55 74**

(EU) Luceco SE

C/Bobinadora 1-5 08302 Mataró
Barcelona, Spain

Assistenza tecnica telefonica

UK - **0330 0249 279**

Non UK - **+39 0434 1696795**

Fornito da BG Electrical Ltd Nexus

Italia, Via Amman 10 33170
Pordenone, Italy