



## TCP Smart Lighting Flood light UK - SMAFLOODRGBCTIP66UK

### Specifications:

- Dimensions: 146 x 35 x 170 mm
- Brightness: 3000 lumen
- Kelvins: Warm 2700K - Daylight 6500K  
RGB 16 million colours
- Power usage: 30w
- Lifetime: 15,000 hours
- Mercury (HG): 0 mg
- Voltage: 100-240V
- CRI: 80
- IP Rating: IP66
- Sensor range: 10m
- Dimmable: Dimmable via app and remote
- Includes: Smart Floodlight, Remote control & Ground stake
- WiFi: 2.4 GHz

### Cautions & Warnings:

The manufacturer provides warranty in accordance with the legislation of the customer's own country of residence, with a minimum of 1 year, starting from the date on which the appliance is sold to the end user.

The warranty only covers defects in material or workmanship.

The repairs under warranty may only be carried out by an authorized service centre. When making a claim under the warranty, the original bill of purchase (with purchase date) must be submitted. The warranty will not apply in cases of:

Normal wear and tear. Use of force, damage caused by external influences. Misuse e.g. connection to an unsuitable mains supply. Partially or completely dismantled appliances.

### CORRECT DISPOSAL OF THIS PRODUCT

(Waste Electrical & Electronic Equipment) This marking shown on the product indicate that it should not be disposed with other household wastes at the end of its working life.

Please separate from other types of waste and recycle responsibly. If in doubt, please contact your local recycling centre for details of where and how this item can be safely recycled.



We are social, check us out!

[YouTube.com/c/TCPSmart](https://www.youtube.com/c/TCPSmart)

@tcpsmart


### Functions:

- RGB - Choose from 16 million colours
  - CCT - Relax with a warm 2700K light or concentrate with a cooler 6500K light
  - Biorhythm
  - Music mode
  - Dimmable via App
  - Schedule your lighting to suit your lifestyle
- TCP hereby declares that the device is in compliance with the essential requirements and other relevant provisions of directives 2014/53/EU and 2011/65/EU. Full declaration can be viewed at [tcp.eu](http://tcp.eu).**


### App Install Instructions:

01. Download the TCP Smart App from the App Store or Google Play.


Log in or set up an account using the on screen prompts.

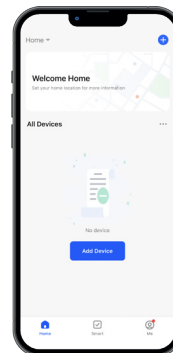


02. Use the add device button in the top right corner.

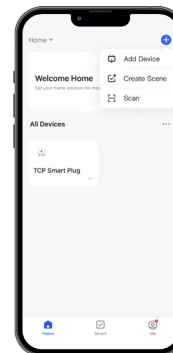


03. Choose add device from the menu.

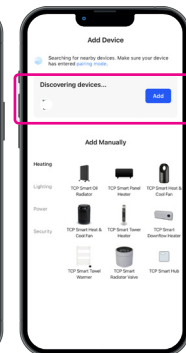

04. The Smart Bulb should automatically be discovered. If not, choose bulb from the lighting tab.

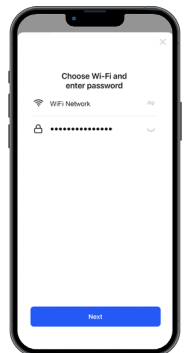

05. Enter your network details.

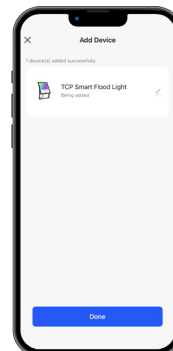

06. Wait for the device to install. Finalise the installation by clicking done.

If the Light is not automatically detected or if the installation fails the Light can be put into set-up mode by turning the power off for at least 10 seconds then turning the Light On and Off 5 times.

On / Off / On / Off / On / Off / On / Off / On / Off / On.


The light should flash quickly.

### Smart Home Assistant


TCP Smart products work with Amazon Alexa, Google Nest & Siri Shortcuts.

For further information on connecting to smart home assistants visit <https://www.tcpsmart.eu/faq/>




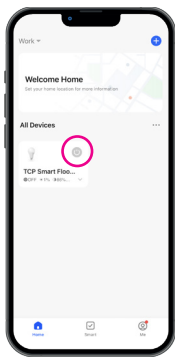


01. Smart Light can be quickly turned On/Off from the home screen.

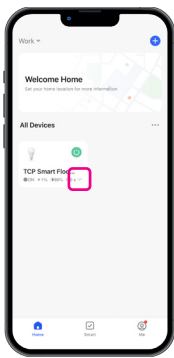


02. Other quick tasks can be accessed by tapping on the down arrow.

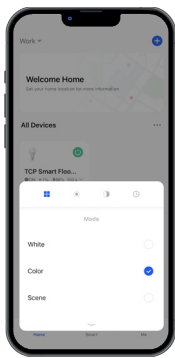


03. **Mode** - Quickly choose the mode.

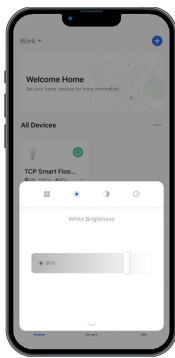

04. **Brightness** - Quickly set the brightness.

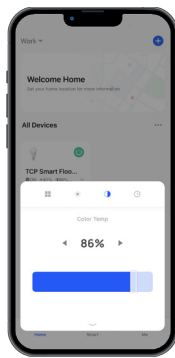

05. **Colour Temperature** - Quickly change the colour temp from Warm to Daylight.

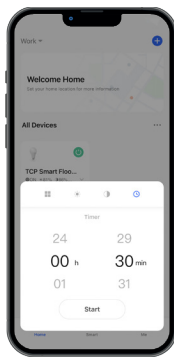


06. **Timer** - Quickly set a timer for the Light to change state. **On > Off, Off > On.**




01. **On/Off** - Press the Power icon to turn On/Off the Light.




02. **Colour** - Move the disc around the colour wheel to choose a colour.

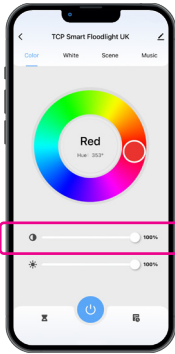

03. The colour vibrancy can be changed here by using the slider.

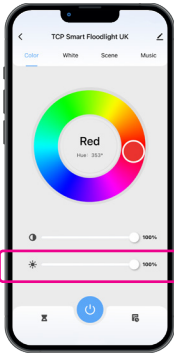


04. Use the slider to set the brightness for the light.

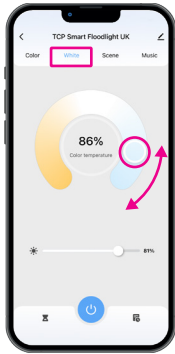


05. **Colour Temperature** - Set the colour temperature from Warm to Daylight.



06. Use the slider to set the brightness for the light.

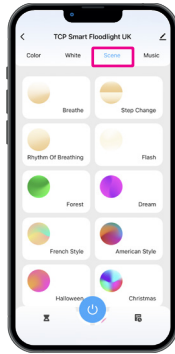

07. **Scenes** - Choose from the list of automated light shows.

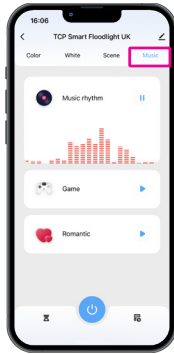

08. **Music** - The light show can change to the beat of music playing on your phone.



09. **Timer** - Set a timer for the Light to change state. **On > Off, Off > On.**



10. Choose the time for when the light should turn On/Off.




11. The timer will now be visible on the home screen.




12. Tap on the now visible timer to change or cancel the timer.




13. **Schedules** - can be set to automate the Smart Light.




14. Saved Schedules can be accessed here. Tap ADD to add your first schedule.




15. From the list chose which type of schedule to use.




16. **Schedule** - set a time for the Light to turn On or Off.




17. Choose the time for the Light to turn On or Off.




18. From the Action list select to turn the Light On or Off.




19. When selecting On you can choose from White, Colour or Scenes.




20. **White** - choose the Colour Temperature and Brightness.




21. **Colour** - Choose the Colour, Vibrancy and Brightness.




22. **Scenes** - Choose from the list of automated light shows.




23. **Execution cycle** - Choose how often the schedule is repeated.




24. **Once, Everyday or Custom days.**



25. **Custom days** - choose which days you want to schedule.



26. **Save once everything has been selected.**

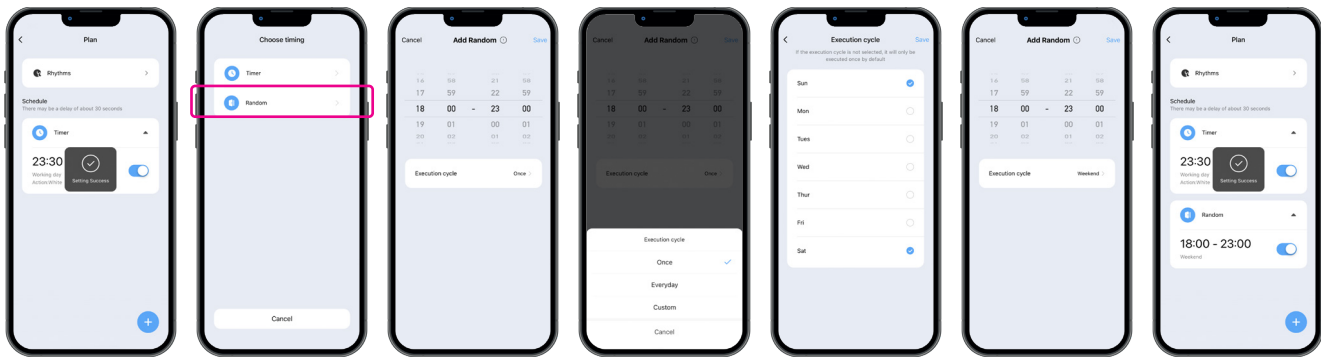

27. Saved schedules are now visible in the schedules tab.

28. Random - The Light will randomly turn On / Off in the selected time period, creating

the illusion people are at home.

29. Once, Everyday or Custom days.

30. Custom days - choose which days you want to schedule.

31. Save once everything has been selected.

32. Saved schedules are now visible in the schedules tab.

## Product Installation

Check to ensure all parts are included. Account for small parts and bin any packaging material, as these may be hazardous to children.

Turn Off Power at circuit breaker box.

### Yoke Mounting:

Mount the fixture to the desired bracket with bolts, lock washer, and nut (not provided).

1. Drill hole in wall.
2. Insert wall plug.
3. Attach and screw the luminaire to the wall.
4. Plug in socket and connect to the power.

### Multiple Application:

1. Wall Application



2. Ground Application



3. Ceiling Application




### Stake Mounting:

1. Screw the stake into the bracket
2. Drive the stake into the ground
3. Plug into an electrical socket

## Remote.

Remote Control

1. Power
2. Dim down
3. White light
4. Colours
5. Timer
6. White scene
7. Dim up
8. Colour scene

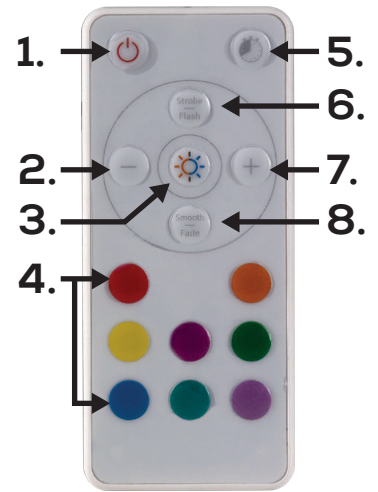

The functions for the various buttons are:

1. Power: click the icon to Turn ON/OFF the light; Press and hold on for 5s to connect APP
2. Timer: Press once for 1h, press twice 2h....till 8h
3. White scene: Night/Read/Working/Leisure
4. Dim down: Adjust the brightness once down at each pressing button, The brightness changes are only valid for white light.
5. White Light: Warm/Nature/Cool
6. Dim UP: Adjust the brightness once up at each pressing button, The brightness changes are only valid for white light.
7. Colour scene: Soft/Colourful/Dazzling/Gorgeous
8. Colour option: Each Icon represents one colour

IR Remote control

You can use the included IR remote to customize the lighting.

Remote MAX distance: 6-8m (Remote on front of the light glass).

## Safety Information:

When using electrical products, basic precautions should always be followed including the following:

- a. To reduce the risk of death, personal injury or property

damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards please read all warnings and instructions included with and on the fixture box and all fixture labels.

b. Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.

c. Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.

d. For residential installation: if you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.

e. Maintenance of the luminaires should be performed by person(s) familiar with the luminaires' construction and operation and any hazards involved. Regular fixture maintenance programs are recommended.

f. DO NOT INSTALL DAMAGED PRODUCT! This luminaire has been properly packed so that no parts should have been damaged during transit. Inspect to confirm. Any part damaged or broken during or after assembly should be replaced.

#### g. WARNING RISK OF ELECTRIC SHOCK

Disconnect or turn off power before installation or servicing.

Verify that supply voltage is correct by comparing it with the luminaire label information- Make all electrical and grounded connections in accordance with the National Electrical - Code (NEC) and any applicable local code requirements.

All wiring connections should be capped with UL approved wire connectors.

#### h. CAUTION RISK OF INJURY

Wear gloves and safety glasses at all times when removing luminaire from carton, installing servicing or performing maintenance.

Avoid direct eye exposure to the light source while it is on.

#### i. WARNING RISK OF BURN!

Allow lamp/fixture to cool before handling. Do not touch enclosure, lens or light source.

Do not exceed maximum wattage marked on luminaire label.

Follow all manufacturer's warnings, recommendations and restriction including but not limited to: driver type, burning position, mounting locations/methods, replacement and recycling.

#### j. CAUTION RISK OF PRODUCT DAMAGE

Never connect components under load.

Do not mount or support these fixtures in a manner that can cut the outer jacket or damage wire insulation.

Always read the fixtures complete installation instructions prior to installation for any additional fixture specific warnings.

#### k. CAUTION RISK OF FIRE

Keep combustible and other materials that can burn, away from lamp/lens.

Do not operate in close proximity to persons, combustible materials or substances affected by heat.