

Using the shaver socket

The shaver socket is powered by a 10W isolating transformer and is only intended for use with electric shavers, electric toothbrush chargers and related products. Any appliance connected to the socket must not exceed the 10W power output as this could cause damage and overheating to occur. Always check your appliance instructions to ensure the power requirements are less than 10W and to determine the correct voltage (115V or 230V) to use. Failure to use the correct socket could damage your appliance and the shaver socket, or both.

To switch between 115V and 230V on the shaver socket press the rocker switch which is located on the bottom of the product.

The shaver socket is permanently live. The pull switch only controls the light.

Care and cleaning

We recommend cleaning with a soft dry cloth.

Do not use solvents or abrasive cleaners as these could damage the finish.


Recycling advice




Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.

Safety information


For your safety, always switch off the mains supply before adjusting or cleaning and before removing the diffuser.



The LED module is protected by a shade. This part must be replaced immediately should the shade become cracked or damaged. This fitting must not be used without the shade in place.



Non-replaceable light source




Replaceable control gear by a professional

LED driver replacement

Obtain suitable replacement driver - ensuring all technical specifications match the existing item.

Connect the input cables to terminal marked 'PRI'.
Connect Blue cable to 'N' and Brown cable to 'L'.
Connect the output cables to the terminal marked 'SEC'.
Red cable to '+' and black cable to '-'.

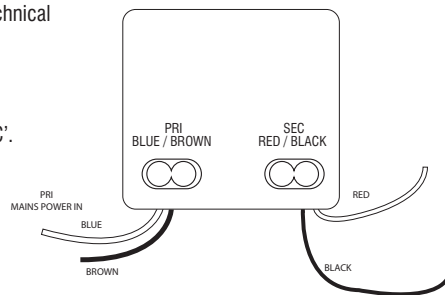

The light source cannot be replaced due to the risk of damage to the LED chips.

This product contains a light source of energy efficiency class G.

UK Manufacturer:

Kingfisher International Products Limited,
3 Sheldon Square, London, W2 6PX,
United Kingdom.

EU Manufacturer:

Kingfisher International Products B.V.
Rapenburgstraat 175E,
1011 VM Amsterdam, The Netherlands.

21/07/2023

LED Shaver Light

243PP, 608PP



Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

Warning

This is a Class 1 product and must be earthed.

Please read these instructions carefully before commencing any work.

This unit must be fitted by a competent and qualified electrician.

Install in accordance with IEE Wiring regulations and current Building Regulations.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a circuit with a 30mA RCD fitted.

If replacing an existing fitting, make a careful note of the connections.

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist.


Check with your local authority or retailer for recycling advice.

Specification

Voltage: 240V 50Hz a.c.
Lamp: 7W LED Module: 4000K/480lm
IP rating: 20

Layout

- Plan the desired layout of this fitting carefully, ensuring the cables will reach the distance between the junction box and the light fitting.
- Avoid locating any cables in positions that would cause a hazard. Position cables and junction boxes (not supplied) away from areas where they may be at risk from being cut, trapped or damaged.
- The mains supply cable must have a minimum cross sectional area of 1.0mm²
- Cables must be protected using suitable conduit or plastic trunking.
- This product no has special protection against the ingress of moisture.

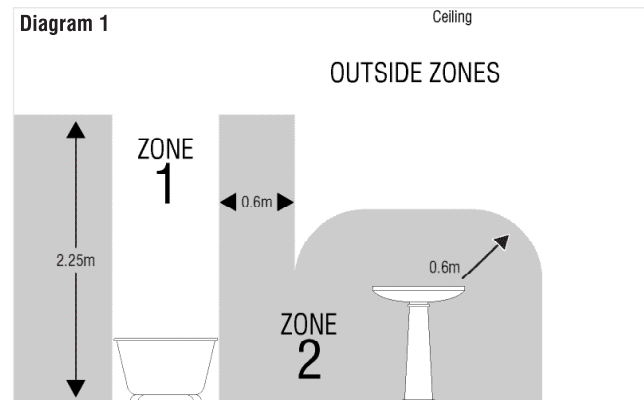

This product has no special protection against the ingress of moisture.

This product is suitable for use in outside zones of a bathroom.



See Diagram 1.

If this unit is being fitted in a room containing a bath or shower, a 30mA RCD must be used - in accordance with IEE regulations.

Installation


Existing fittings must be completely removed before installation of a new product. Before removing the existing fitting, **carefully note the position of each set of wires.**

- The help of an assistant is recommended when installing this fitting.
- See Fig. 1. Detach the back panel from the product by removing the two screws. Keep safe for refitting later.
- See Fig. 2. Pull the diffuser off the front of the product. (Push down on the ends of the product to release).
- Using the shaver light as a template, hold the product in place and mark the position of the fixing holes. Ensure that the product is level.
- Ensure the wall is capable of holding the weight of the product. Take care to avoid damaging any concealed wiring and pipes. The correct fixings should be used for brick, cavity walls or plasterboard.
- Feed the mains cable through the hole in the back panel removed earlier.
- Wire fitting as detailed below.

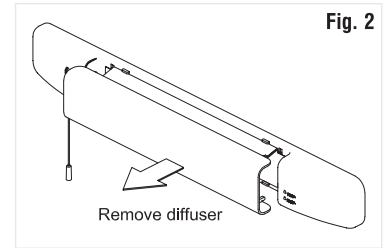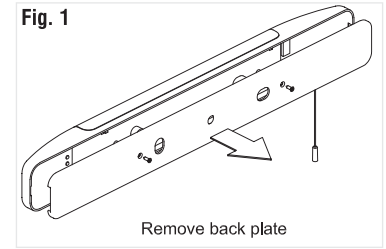

Wiring

Having identified the household wiring from your existing light fitting, connect to the connection block inside the product in the following way:

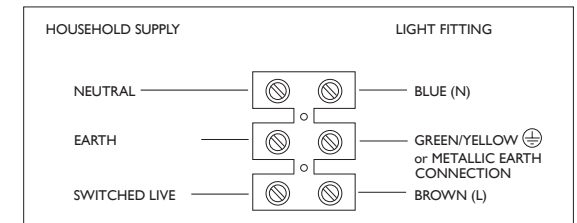


Check that...

- You have correctly identified the wires
- The connections are tight
- No loose strands have been left out of the connection block.

Commissioning

- Refit back panel using screws set aside earlier
- See Fig. 3. Attach the shaver light to the wall using the holes drilled earlier and the supplied fixings.
- Refit the diffuser. See below.
- Replace fuse or circuit breaker and switch on. Your light is now ready for use.

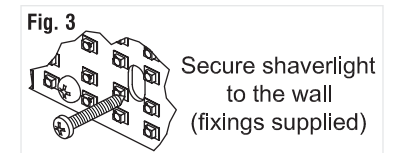

Refitting the diffuser

- Locate one tab into the product (1).
- Pulling against the engaged tab, firmly grip the diffuser and flex it inwards (2) to engage the tab into the other slot (3).

