



INSTALLATION & MAINTENANCE MANUAL

CALC03Bxx / CALC03Pxx / CALVI3Bxx
CALVI3Pxx / CALVI5Bxx / CALVI5Pxx

GENERAL INSTRUCTIONS

These instructions should be read carefully and retained after installation by the end user for future reference and maintenance.

These instructions should be used to aid installation of the following products:

CALCO3Bxx / CALCO3Pxx / CALVI3Bxx / CALVI3Pxx / CALVI5Bxx / CALVI5Pxx

SAFETY

- This product must be installed in accordance with the latest edition of the IEE Wiring Regulations (BS7671) and current Building Regulations. If in any doubt, consult a qualified electrician
- Please isolate mains prior to installation or maintenance
- Check the total load on the circuit (including when this luminaire is fitted) does not exceed the rating of the circuit cable, fuse or circuit breaker
- Please note the IP (Ingress Protection) rating of this product when deciding the location for installation
- This product is for indoor use only
- This product is Class I and must be earthed
- This product is IP20 rated

INSTALLATION

- Provide power to the required point of installation
- Remove the mounting bracket from the luminaire and disconnect the 3-pole connector by squeezing the sides (see Fig. 1)

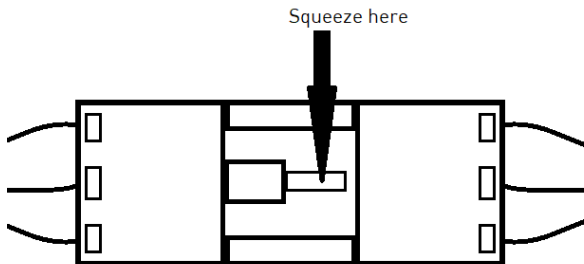


Fig. 1

- Using the mounting bracket as a template, mark the location for, and drill the fixing holes ensuring not to infringe with any gas/water pipes or electrical cables
- Secure the mounting bracket to the ceiling using the screws and plugs provided
- Connect the terminal block on the mounting bracket to the mains supply ensuring the correct polarity is observed: L – Live (brown), Earth (green/yellow), N – Neutral (blue)
- Adjust each lampholder flex to the required length by unscrewing the outer nut of the cable gland and pushing the flex up into the fitting (see Fig. 2). Retighten the nuts on the cable glands

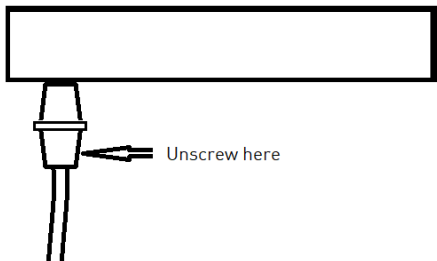


Fig. 2

- Connect the luminaire to the mounting bracket by means of the 3-pole connector
- Align the luminaire with the mounting bracket, and secure with the screws provided
- Insert suitable E27 lamps (40W max.)
- Switch on and check for correct operation

GENERAL

Clean with a soft dry cloth only, do not use aggressive cleaning products or solvents which may damage the product.

This product is dimmable dependent on lamp type.

This product should be recycled in the correct manner when it reaches the end of its life. Check local authorities for where facilities exist.

WARRANTY

This product has a warranty of 1 year from date of purchase. Failure to install this product in accordance with the current edition of the IEE Wiring Regulations (BS7671), improper use, or removal of the batch code will invalidate the warranty. If this product should fail within its warranty period, it should be returned to the place of purchase for a free of charge replacement. ML Accessories does not accept responsibility for any installation costs associated with the replacement product. Your statutory rights are not affected. ML Accessories reserve the right to alter product specification without prior notice.

Supplied By:

(UK) Manufacturer

ML Accessories Ltd, Unit E Chiltern Park, Boscombe Road, Dunstable LU5 4LT,
www.mlaccessories.co.uk

(EU) Authorised Representative

nnuks Holding GmbH, Niederkasseler Lohweg 18,
40547 Düsseldorf, Germany,
Email: eprel@nnuks.com

