



INSTALLATION & MAINTENANCE MANUAL

TORIXF4K

GENERAL INSTRUCTIONS

These instructions should be read carefully and retained after installation by the end user for future reference and maintenance.

**These instructions should be used to aid installation of the following products:
TORI5F4K / TORI6F4K**

SAFETY

- This product must be installed in accordance with the latest edition of the IEE Wiring Regulations (BS7671) and current Building Regulations. If in any doubt, consult a qualified electrician
- Please isolate mains prior to installation or maintenance
- Check the total load on the circuit (including when this luminaire is fitted) does not exceed the rating of the circuit cable, fuse, or circuit breaker
- Please note the IP (Ingress Protection) rating of this product when deciding the location for installation
- This product is Class II double insulated
- This product is IP68 rated ** Product is not designed to be submerged in water

INSTALLATION

Note - If this luminaire is being used in conjunction with an external PIR or sensor, please confirm with the manufacturer of the sensors that they are compatible with LED luminaires.

- Provide power to the required point of installation (refer to BS7671 for correct cabling methods). Suitable IP rated junction boxes should be used where required
- Unscrew the cable retainer from each of the ceiling fixings (see Fig. 1)




Fig. 1

- Fix the ceiling fixings to the ceiling using suitable screws and plugs (see Fig. 2)
- Thread the cables through the cable retainers, and screw the cable retainers back into the ceiling fixings (see Fig. 2)
- Push each cable hanging from the ceiling fixings into one of the adjustment connectors until it appears out of the hole in the side (see Fig. 2)

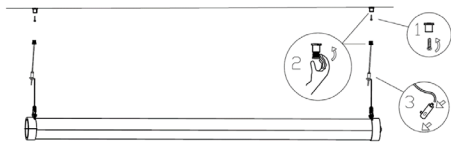


Fig. 2

- Attach the suspension cable to the eyelet on the luminaire
- Round cable should be used for the mains supply. The use of flat cable will cause water ingress to the fitting
- Feed the cable through the compression gland on the side of the luminaire
- Connect the luminaire to the mains supply ensuring the correct polarity is observed (see Fig. 3): L – Live (brown) and N – Neutral (blue)




Fig. 3

- Tighten the compression gland ensuring a tight seal is made
- Switch on and check for correct operation

WARNING

This product must be disconnected from the circuit if subjected to any high voltage or insulation resistance testing. Irreparable damage will occur if this instruction is not followed.

GENERAL

This product contains a light source of energy efficiency class C to Regulation (EU) No. 2019/2015 and (UK) 2021 No. 1095.

This product contains a nonreplaceable LED light source and a nonreplaceable control gear.



Clean the external surfaces with a damp cloth using a mild solution of detergent and warm water only, do not use aggressive cleaning products or solvents that may damage the product.

This product is non-dimmable.

This product should be dismantled for disposal when it reaches the end of its life. Please see website for dismantling instructions

This product should be recycled in the correct manner when it reaches the end of its life. Check local authorities for where facilities exist.

WARRANTY

This product has a warranty of 5 years from the date of purchase. Failure to install this product in accordance with the current edition of the IEE Wiring Regulations (BS7671), improper use, or removal of the batch code will invalidate the warranty. If this product should fail within its warranty period, it should be returned to the place of purchase for a free of charge replacement. ML Accessories does not accept responsibility for any installation costs associated with the replacement product. Your statutory rights are not affected. ML Accessories reserve the right to alter product specification without prior notice.



ML
ACCESSORIES LTD



**UK
CA**



Supplied By:

(UK) Manufacturer

ML Accessories Ltd, Unit E Chiltern Park, Boscombe
Road, Dunstable LU5 4LT, www.mlaccessories.co.uk

(EU) Authorised Representative

nnuks Holding GmbH, Niederkasseler Lohweg 18,
40547 Düsseldorf, Germany, www.nnuks.com

Email: eprel@nnuks.com

Made in China

52

AVMAR22_V1