

OVERLAP TOOL STORE - ASSEMBLY INSTRUCTIONS

FP04

SHOULD YOU REQUIRE ANY ADDITIONAL GUIDANCE WITH THE ASSEMBLY OF YOUR SHED PLEASE CONTACT OUR TECHNICAL HELP LINE ON 0844 248 9853.




IMPORTANT: ASSEMBLY OF THIS SHED REQUIRES TWO PEOPLE

ISSUE 0310


Thank you for choosing this garden building manufactured by the UK's largest manufacturer of timber garden products. In order to gain the most benefit from it, please note the following:

- Exercise particular care and follow instructions whilst cutting the roofing felt. If it is cut incorrectly, additional roofing felt can be inexpensively purchased from most good DIY retailers or garden centres.
- Most buildings are pre-treated with a factory base coat for protection during storage and transit. We recommend that you treat your new building as soon as possible after assembly, using a wood preservative treatment. Apply in accordance with the manufacturers instructions.
- If there are any technical queries with the product, please contact our customer help line on 0844 248 9853 between the hours of 8.30 am and 5.00 pm Monday to Friday.
- Please ensure that you thoroughly check all component parts for quantity and quality before you commence building the product. If there are any missing parts, please contact the help line as shown immediately. The manufacturer cannot be held liable for damaged items once any part of the product has been fitted or altered in any way (e.g. Painted)
- Timber is a natural material. It will shrink and swell as a result of varying moisture content.
- Please keep all plastic bags and small parts away from children in order to reduce the risk of suffocation.

REQUIRED TOOLS : (NOT SUPPLIED)

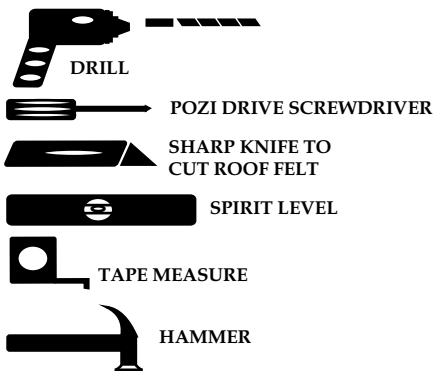

FIXING PACK (FP04) CONTENTS :

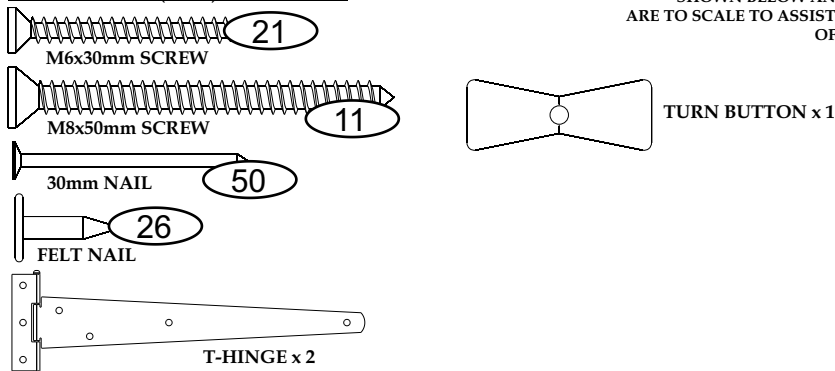


PLEASE NOTE: ALL SCREWS AND NAILS SHOWN BELOW AND IN INSTRUCTIONS ARE TO SCALE TO ASSIST IN IDENTIFICATION OF REQUIRED FIXINGS.

FRONT PANEL x 1 (POTS01FRV2)


LH SIDE x 1 (POTS01LHSIDEV2)

OSB FOR BACK : 1696x1015mm QTY 1 (169610158)


FELT x 1(85069)



DOOR x 1 (PTGVDR1672)



RH SIDE x 1 (POTS01RHSIDEV2)



OSB FOR ROOF : 1118x678mm QTY 1 (11186788)

OSB FOR SHELF : 1015x240mm QTY 1 (10152408)



FIXING PACK x 1

FLOOR BATTENS : 28x28x570mm QTY 3 (28280570PTR)

ROOF BATTENS : 28x28x1118mm QTY 1 (28281118) 28x28x650mm QTY 2 (28280650)


CORNER STRIPS : 45x15x1790mm QTY 2 (45151790DTR)

SHELF SUPPORTS : 28x28x959mm QTY 1 (28280959) 45x28x959mm QTY 1 (45280959)


OSB FOR FLOOR : 1015x570mm QTY 1 (10155708)

1

PLACE THE THREE 28x28x570mm BATTENS (28280570PTR) ONTO THE GROUND SO THAT ENDS ARE FLUSH, AND THERE IS A 465mm GAP BETWEEN EACH ONE. PLACE 1015x570mm SHEET OF OSB (10155708) ON TOP OF THE BATTENS. SECURE SHEET OF OSB TO EACH BATTEN WITH THREE 30mm NAILS PLACED AS SHOWN ABOVE. IT IS VITAL THAT THE NAILS LOCATE INTO THE BATTENS.

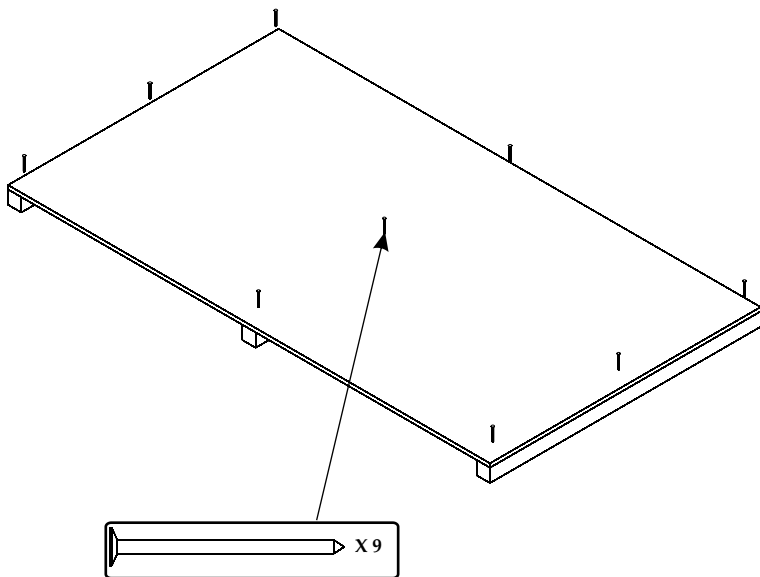

2

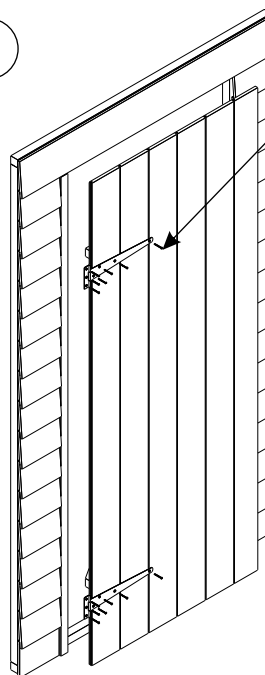

A) FASTEN EACH OF THE TWO HINGES TO THE LEFT HAND SIDE OF THE DOOR (PTGVDR1672) USING 30mm SCREWS. SCREWS **MUST** SECURE INTO THE TWO HORIZONTAL BRACES ON THE BACK OF THE DOOR.
B) LAY FRONT SECTION (POTS01FRV2) FACE UP ON GROUND. POSITION DOOR ON FRONT SECTION OF UNIT ENSURING THAT THE DOOR IS SQUARE WITH EQUAL GAPS TO LEFT AND RIGHT. SECURE HINGES TO FRONT SECTION WITH 30mm SCREWS.

3

X3 PER SIDE TO FRONT
X2 PER SIDE TO FLOOR
X1 FOR FRONT OF FLOOR

POSITION COMPLETE FRONT PANEL OF UNIT ONTO FLOOR SO THAT THE LEFT AND RIGHT HAND EDGES OF THE PANEL ARE FLUSH WITH THE EDGES OF THE FLOOR. PLACE ONE OF THE SIDE PANELS (**POTS01LHSIDEV1**) ONTO THE FLOOR AND PLACE UP AGAINST FRONT PANEL (PLEASE NOTE: UPPER EDGE OF SIDE PANEL MUST BE AGAINST FRONT PANEL). SECURE THROUGH SIDE PANEL INTO FRONT PANEL USING 3 x 50mm SCREWS PLACED AS SHOWN TO ABOVE. DO NOT SECURE THE PANELS TO THE FLOOR AT THIS POINT. ONCE SECURE, PLACE AND SECURE THE REMAINING SIDE SECTION (**POTS01RHSIDEV2**) IN THE SAME MANNER.

ONCE SECTIONS ARE IN PLACE SECURE TWO SIDE SECTIONS AND FRONT SECTION TO FLOOR WITH TWO 50mm SCREWS PER SIDE AND ONE AT FRONT (50mm SCREW AT FRONT MUST LOCATE INTO CENTRAL FLOOR BEARER).

4

45x28x959mm BATTEN
OSB 1015x240mm
28x28x959mm BATTEN

X 8
28mm

LAY A 45x28x959mm (45280959) AND A 28x28x959mm (28280959) BATTEN ON THE GROUND. PLACE THE 1015x240mm SHEET OF OSB (101502408) ON TOP OF THE BATTENS SO THAT THE LONG EDGES OF THE 28x28mm BATTEN IS FLUSH WITH THE LONG EDGE OF THE OSB AND THE ENDS ARE OFFSET BY 28mm. THE 45x28mm BATTEN SHOULD ALSO BE OFFSET FROM THE ENDS BUT MUST ALSO PROTRUDE 28mm ON ITS LONGER SIDE AS SHOWN. SECURE THE OSB TO THE BATTENS USING 4x30mm NAILS FOR EACH.

PLACE SHELF INTO UNIT SO THAT SHEET OF OSB SITS ON TOP OF UPPER HORIZONTAL FRAMEWORK OF LEFT AND RIGHT HAND SIDES. 45x28mm BATTEN MUST BE FLUSH WITH FRAMEWORK AT BACK OF UNIT. SECURE THROUGH OSB INTO FRAMEWORK OF SIDES WITH TWO 30mm NAILS PER SIDE.

5

X3 PER CORNER STRIP
X12 ON OSB FOR A TOTAL OF 18

PLACE 1696x1015mm SHEET OF OSB (169610158) AGAINST BACK OF UNIT WITH LEFT AND RIGHT HAND EDGES FLUSH WITH OUTER FLOOR BEARERS AND BOTTOM EDGE FLUSH BOTTOM OF FLOOR OSB. SECURE IN PLACE WITH SIX 30mm NAILS DOWN THE LEFT AND RIGHT SIDES. SECURE 1790mm CORNER STRIP (45151790DTR) TO EACH FRONT CORNER OF THE UNIT WITH THREE 30mm NAILS.

6

X 11

LAY THE 28x28x1118mm BATTEN (28281118) AND THE TWO 28x28x650mm BATTENS (28280650) FLAT ON THE GROUND. ENDS OF 650mm BATTENS MUST BUTT UP AGAINST SIDE OF 1118mm BATTEN. LAY 1118x678mm SHEET OF OSB ON TOP OF BATTENS AND SECURE THROUGH SHEET OF OSB INTO EACH 650mm BATTEN WITH THREE 30mm NAILS, AND THE 1118mm BATTEN WITH FIVE 30mm NAILS. THIS IS THE ROOF SECTION.

7

X 6

PLACE ASSEMBLED ROOF SECTION ONTO THE UNIT. ENSURE EQUAL OVERHANG TO LEFT AND RIGHT SIDES. BACK OF ROOF SHOULD BE FLUSH WITH OSB ON BACK OF UNIT. SECURE THROUGH ROOF OSB INTO TOP FRAMEWORK OF LEFT AND RIGHT HAND SIDES WITH THREE 30mm SCREWS.

8

FELT NAIL PLACED AT 150mm INTERVALS. 26 IN TOTAL

OPEN ROOFING FELT AND ROLL OUT FLAT ON GROUND.

WHEN FELT HAS FLATTENED PLACE IT ON THE ROOF SO THAT IT OVERLAPS BY APPROXIMATELY 40mm AT THE LEFT AND RIGHT HAND SIDE OF THE ROOF, BY APPROXIMATELY 40mm AT THE FRONT OF THE ROOF, AND ALLOW REMAINDER OF FELT TO OVERHANG BACK. SECURE FELT WITH FELT NAILS PLACED AT 150mm INTERVALS ALONG THE OUTER EDGES OF THE ROOF. CUT AND FOLD FELT AT CORNERS AND SECURE FOLD WITH A FELT NAIL. FOLD FELT OVER BACK OF UNIT AS SHOWN ABOVE AND SECURE TO OSB BACK WITH FELT NAILS PLACED AT 150mm INTERVALS.

9

X 1

ATTACH TURN BUTTON WITH ONE 30mm SCREW. SCREW MUST LOCATE INTO FRAMEWORK OF UNIT FRONT AND BE POSITIONED SO THAT IT WILL HOLD DOOR CLOSED.