

Vessel Bathroom Wall Light Installation Instructions

These instructions on wiring and installation are provided as a guideline to assist you. Some experience of electrical wiring and do-it-yourself is required to install the light fitting. If at any time you are unsure of how to proceed, **you must consult a qualified electrician.**

Before Starting

Please read through these instructions before commencing work, and keep them for future reference. **Please Take Extreme Care When Carrying Out These Instructions.**

Warning!

This light fitting is Class 1 and must be connected to an Earth circuit
Install in accordance with IEE Wiring regulations and current Building Regulations.
To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge.
This light fitting should be connected to a fused circuit.
If replacing an existing fitting, make a careful note of the connections.
Always use the correct type and wattage bulb. Never exceed the wattage stated.
When changing a bulb, always switch off at the mains and allow the old bulb to cool down before handling.
Dispose of used bulbs carefully and responsibly.
Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.


Layout

- This product must only be fitted with the lampholder facing upwards.
- This product has special protection against the ingress of moisture and is IP44 rated.
- Please ensure that this light is mounted out of the reach of children.

Installation

Existing fittings must be completely removed before installation of a new product. Before removing the existing fitting, carefully note the position of each set of wires.


- Undo the side screws using the supplied allen key and remove the wall back.
- Hold the wall back in place and mark the position of the holes. Ensure that the product is level.
- Ensure the wall is capable of holding the weight of the product. Take care to avoid damaging any concealed wiring and pipes. The correct fixings should be used for brick, cavity walls or plasterboard.
- Fix the wall back into position.

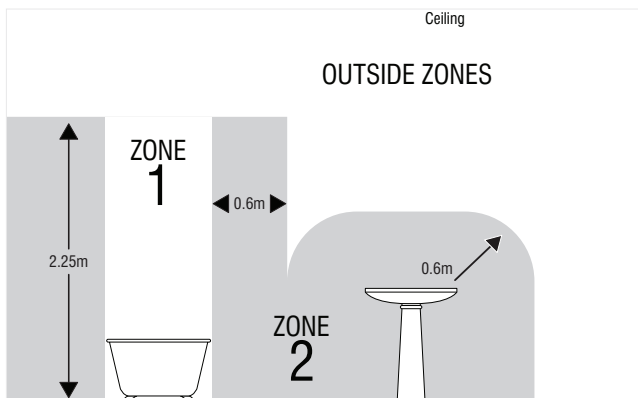

This product is suitable for use in Zone 2 and outside Zones of a bathroom. See diagram.
If this unit is being fitted in a room containing a bath or shower, a 30mA RCD must be used - in accordance with IEE regulations.

Wiring

Having correctly identified the wiring from your existing light fitting, pull the wire through the rear of the fixture making sure that the seal is still present. Connect to the connection block inside the product in the following way:

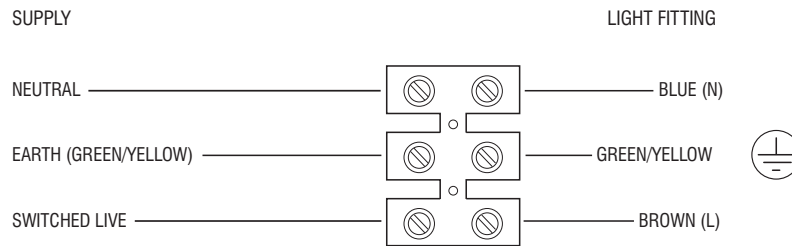

Check that.....

You have correctly identified the house wires.
The connections are tight.
No loose strands have been left out of the connection block.

Commissioning

- Ensure that there are no bare or loose strands of wire exposed, and cover all exposed areas of the connection block with two layers of insulation tape.
- Fit the product onto the wall back and using the supplied allen key, tighten the screws to secure. Take care not to trap any wiring.
- Replace fuse or circuit breaker and switch on. Your light is now ready for use.

Fitting/Replacing the bulb


- When changing a bulb, always switch off at the mains and allow the bulb to cool before handling. Used bulbs should not be disposed of with household waste. Please recycle where facilities exist.
- Always use the correct type and wattage bulb. Using the incorrect wattage bulb will damage the product.
- Pull the shade gently upwards to remove. Unscrew the bulb anticlockwise to remove.
- Insert the bulb gently into the fitting. Screw clockwise into the lampholder.
- Locate the shade over the spring clamps and push gently down until the shade is sitting correctly.

Care and cleaning

Finish - We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will damage the finish.

Safety Information

For your safety, always switch off the supply before cleaning or removing shades.



This light source is protected by a shade. The shade must be replaced immediately should it become cracked or damaged. This fitting must not be used without the shade in place.



Waste electrical products should not be disposed of with normal household waste. Please recycle where facilities exist. Check with your Local Authority for recycling advice.