


IN00413 (rev A)


Telescopic Corner Entry

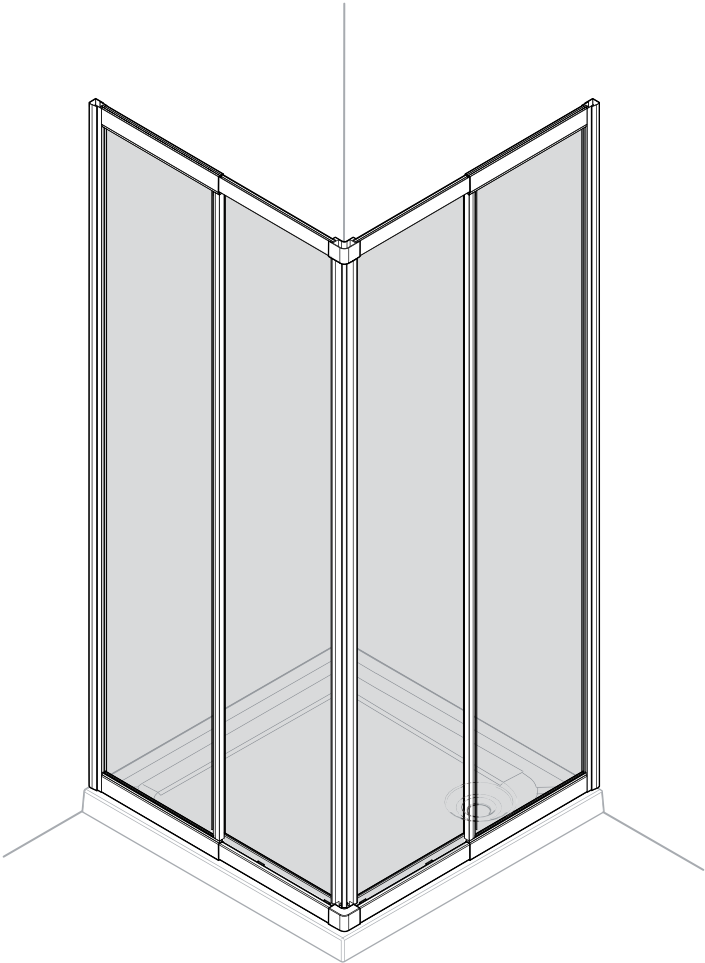

Before You Start

- Check that the tray has been installed correctly and that it is level (Fig. A), tiled down onto and sealed to the manufacturer's guidelines. **Please Note:** All product supplied without tray.
- Ensure the product is fitted to a non-porous surface ie. tiled. Check that the wall surface is flat.
- Unpack and check the product is complete and undamaged.
- Fixings are supplied for solid walls only. Ensure that the correct fixings are used for the wall type – if in doubt seek professional advice.
- Ensure the area is clean, dry and dust free.
- Read the instructions in full.
- Have the correct tools available, (as shown below, see 'Tools Required').
- It is recommended to situate the showerhead and door adjacent to each other in order to allow any water spray to be on the side panel or upstanding wall.

Fig.A.

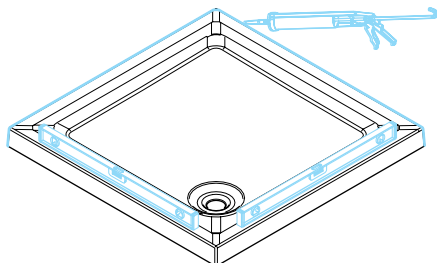










Safety

- Handle all glass with care - support on cardboard to avoid risk of breakage.
- This product is heavy and requires 2 people to carry and install it.
- When drilling walls check first for hidden pipes and cables.
- All glass is toughened – it cannot be reworked or replaced by ordinary glass.
- Use safety eyewear when drilling.
- Use safety eyewear when handling glass.
- Keep all small parts away from children.

Disclaimer

- Please notify the retailer immediately of any damage or faults. The manufacturer cannot be held responsible for any installation costs that may arise from damaged or faulty product being installed.
- Please dispose of all packaging with due regard to the environment.

Tools Required (not supplied)

Spirit Level 	Screwdriver 	Tape Measure 	Pencil 	Utility Knife 
Junior Hacksaw 	Silicone Gun & Sealant 	Power Drill 	Suitable Drill Bits 	* Ensure drill bit used is suitable for wall surface



Help Line: 0870 241 6131

Lines open: 8.30am - 5.00pm Monday to Friday
Standard National call charge rate from BT landlines


Parts & Fittings Supplied




Please notify the retailer immediately of any damage or faults. The manufacturer cannot be held responsible for any installation costs that may arise from a damaged or faulty product being installed.




Keep small parts away from children

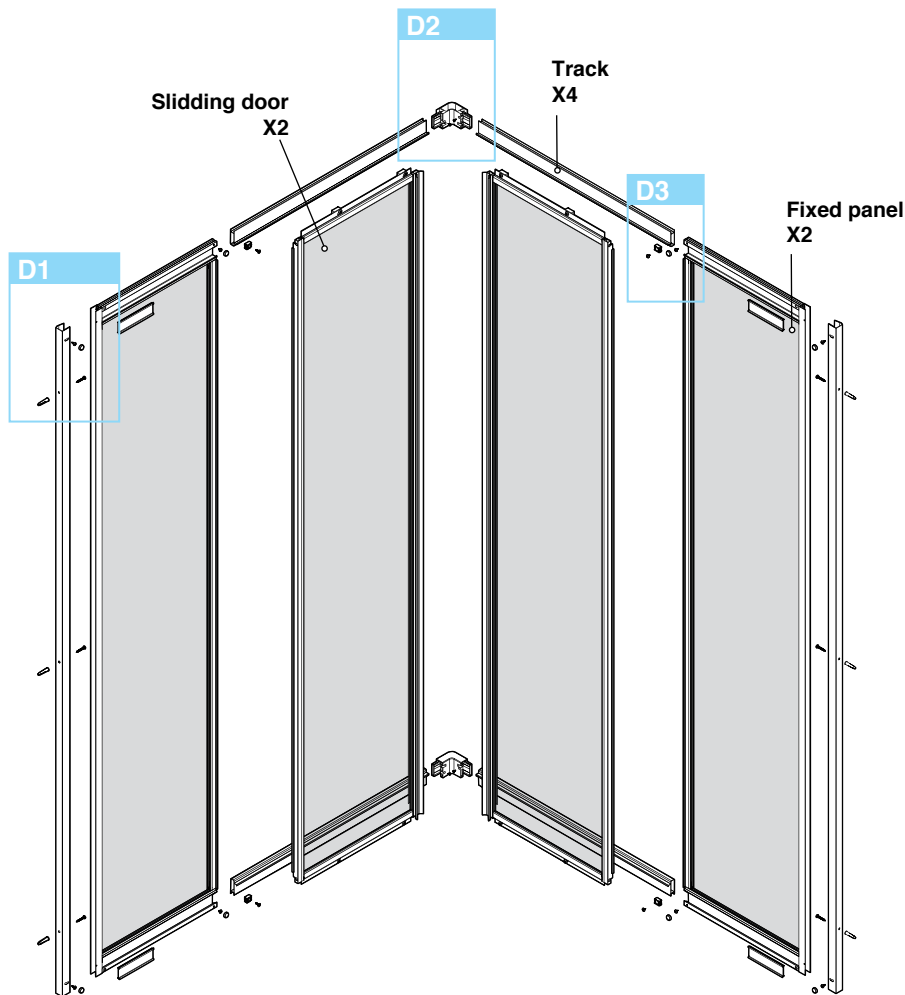


D1

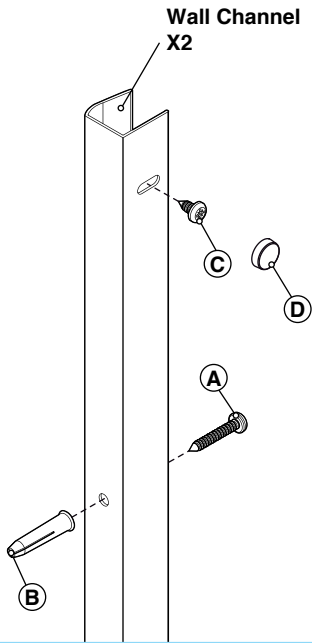









D2

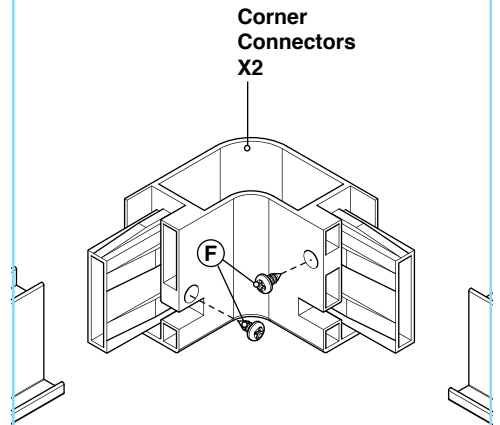

D3

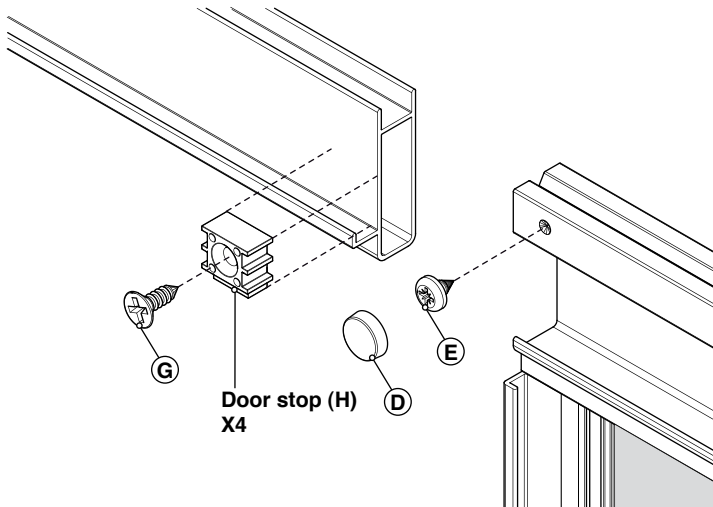


Loose Screws & Fittings Supplied

(A)	No.8 x 1" Pan Head Pozi Screws	 (actual size)	Qty
			x6
(B)	Wall Plugs	 (actual size)	Qty
			x6
(C)	No.8 x 3/8" Pan Head Pozi Screws	 (actual size)	Qty
			x4
(D)	Screw Snap Cap	 (actual size)	Qty
			x8
(E)	No.8 x 1/4" Pan Head Pozi Screws	 (actual size)	Qty
			x4
(F)	No.4 x 1/4" Pan Head Pozi Screws	 (actual size)	Qty
			x4
(G)	No.8 x 1/2" Countersunk Pozi Screws	 (actual size)	Qty
			x4
(H)	Door Stop	 (actual size)	Qty
			x4

Corner Joint Moulding Preparation:


Inside View

i)

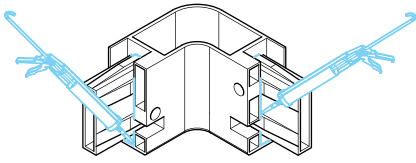


Apply Silicone sealant to both top and bottom Corner Joint Mouldings as shown.


ii)

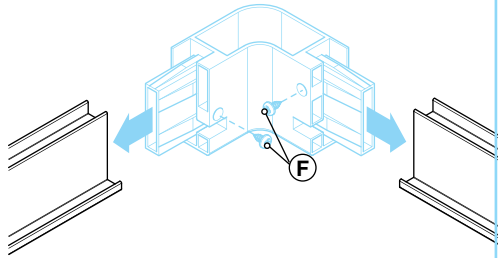

1

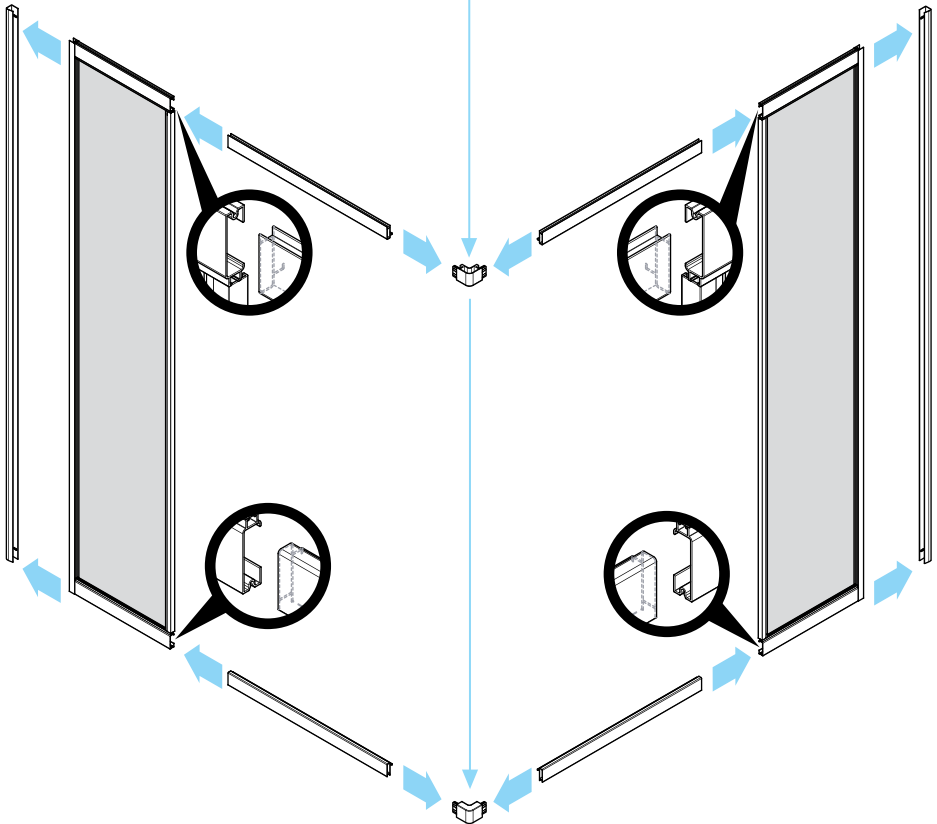


2

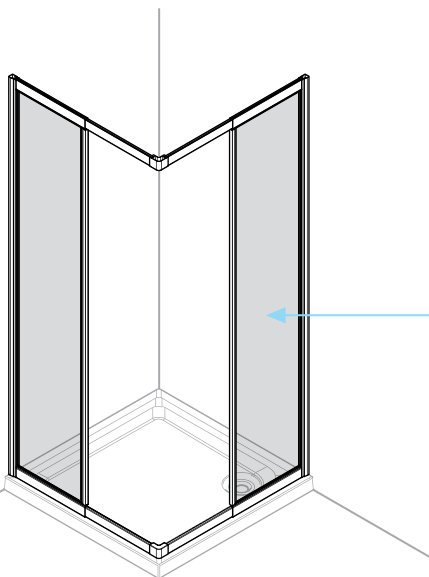

Do NOT fix wall channel at this stage. Ensure Wall Channel is level and mark position.

2.1

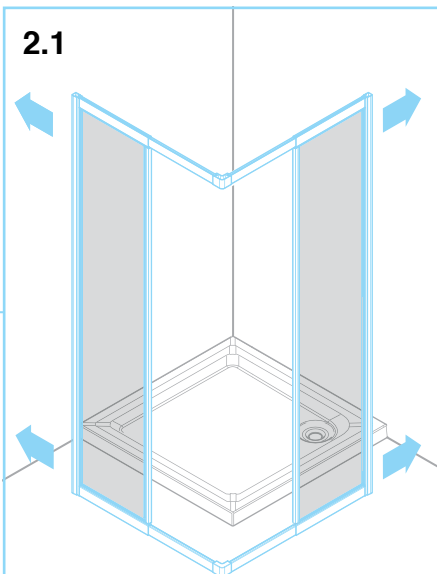


Plan View



Ensure glass is positioned straight and is parallel with tray.




IMPORTANT NOTE:
DO NOT push frame fully into channels, allow an even dimension on the tray surface all around.

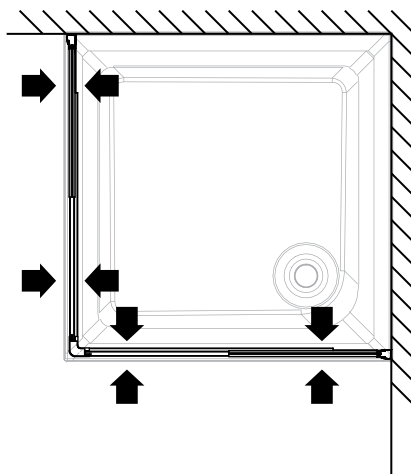

Inside View


3.1

Adjust Telescopic slider
to fit tray

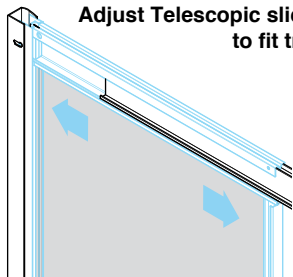


3.2

Drill 3.2mm dia hole
fix through two channels

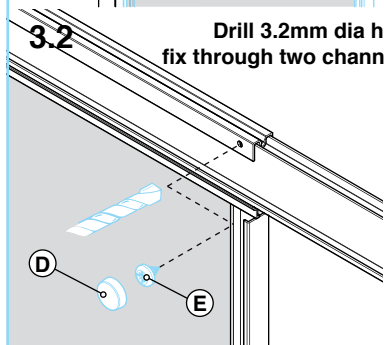

3

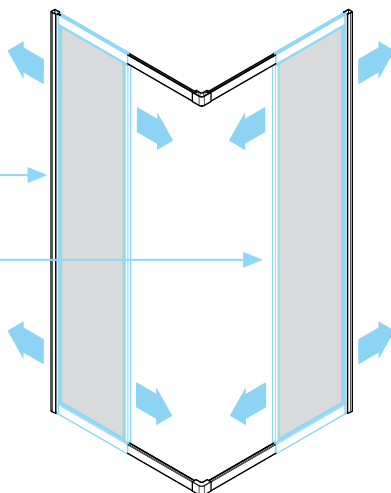

Take care to ensure that telescopic
slider is fitted straight & not twisted.
Ensure same dimensions at top &
bottom of panels.




Wall plugs supplied are for solid walls only. Ensure correct wall plug for wall type is used. If in doubt seek professional advice.




Position Wall Channel on wall as shown, ensure Wall Channel is fixed level.

4

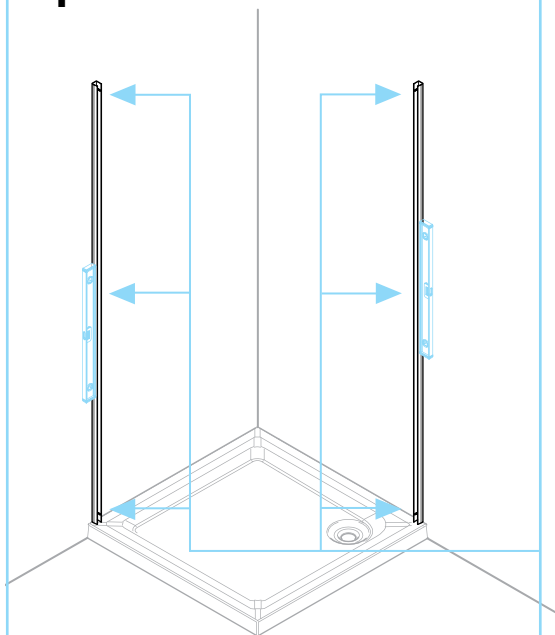


Tip: When drilling tiles apply masking tape to surface to stop drill bit slipping.

4.1

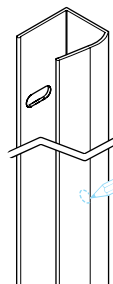


Mark position of pre-drilled Wall Channel fixing hole

4.2




6mm dia. holes with drill bit suitable for wall surface

4.3

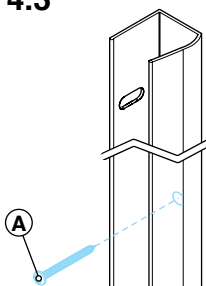


Fix through pre-drilled Wall Channel fixing hole

5

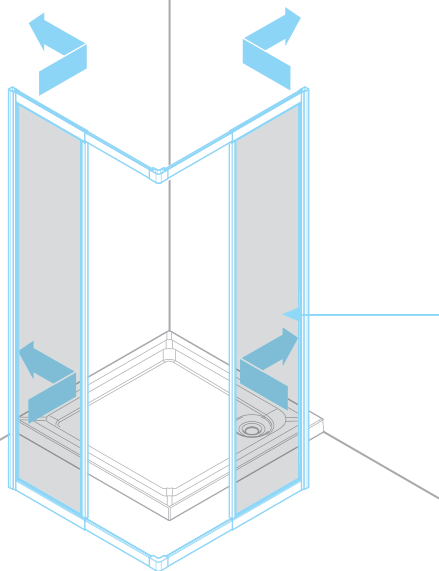

Tip: When positioning frame, hold frame and position bottom corners first.


Plan View

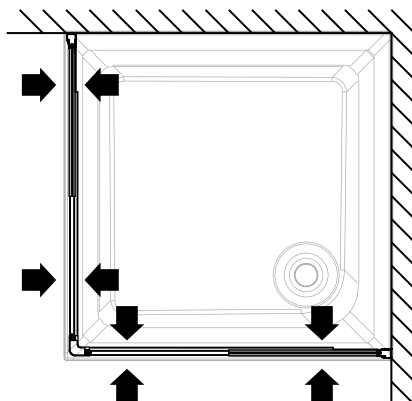

Ensure glass is positioned straight and is parallel with tray.

Inside View


6

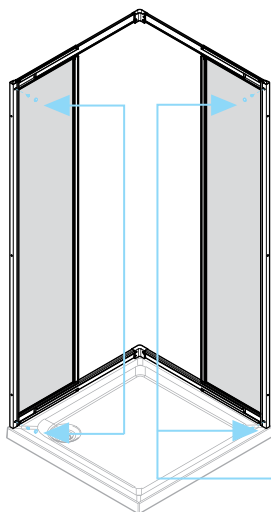

Ensure glass is positioned straight and is parallel with tray.

Inside View


6.1

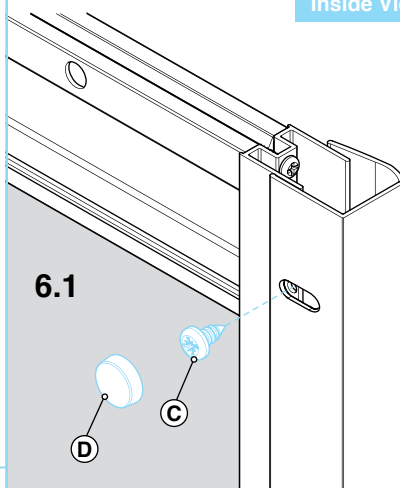

Tip: When inserting screws apply a small amount of oil to the screw thread to allow easier fixing.


Inside View

7

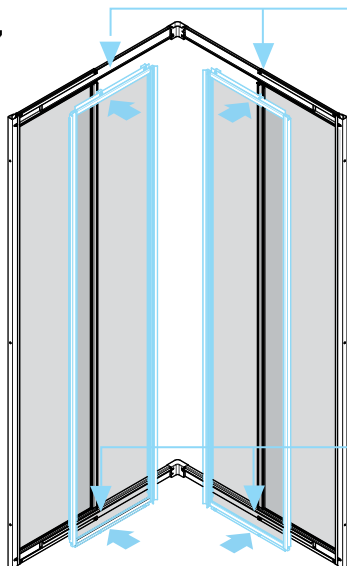


Tip:
Locate sliding blocks on top rail first.

Inside View

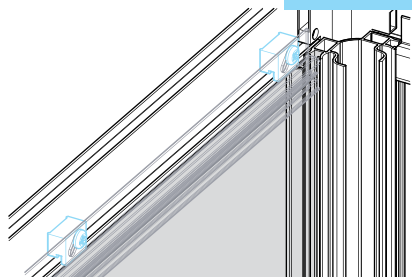


Side View

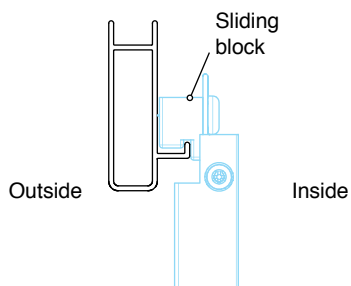


Inside View

8

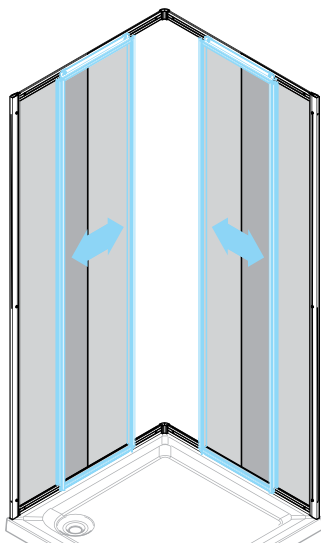

Ensure doors are level and you have free movement.


Door in CLOSED Position: Inside View

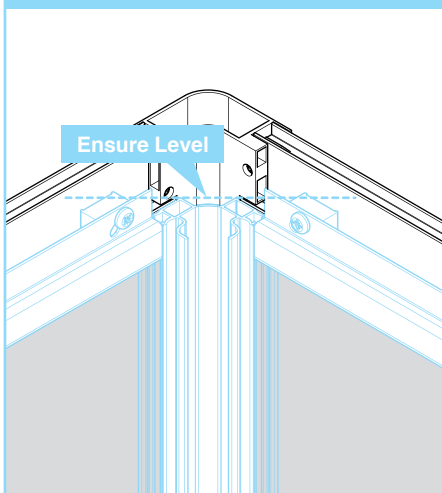

IMPORTANT NOTE:
Ensure Doors are level with each other. Refer to Fig. C (overleaf) for adjustment details if necessary.


Fig. C: Door Adjustment and Levelling Details

Inside View

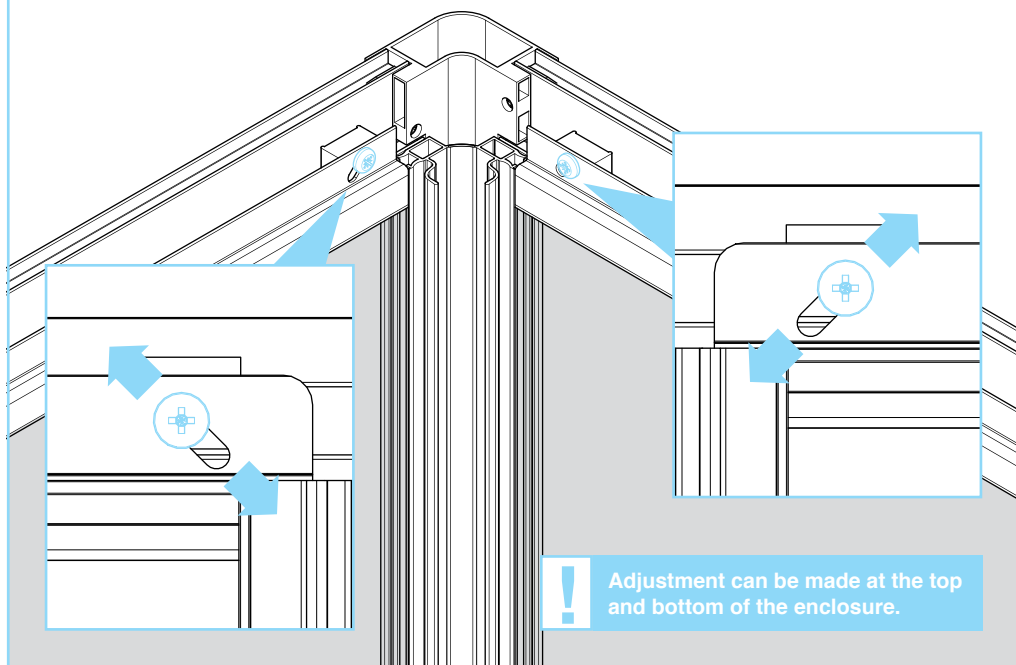


Inside View

9

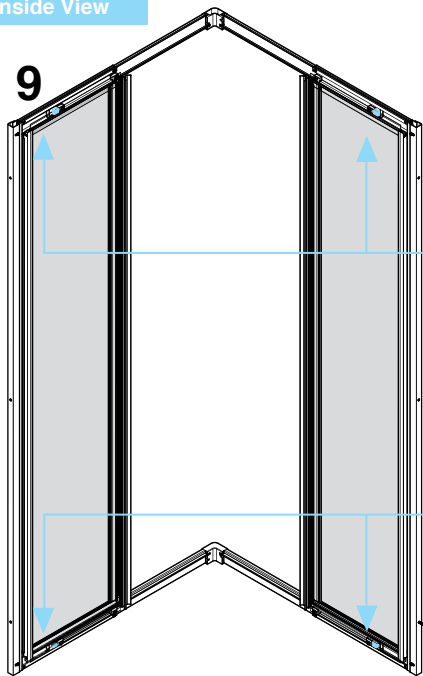


Inside View

9.1




Open door, position
& mark location of
door stop

9.2



Close door, drill
3.2mm dia. holes
through track

9.3




Fix door stop to
track



Door frame hidden for clarity


Inside View

10

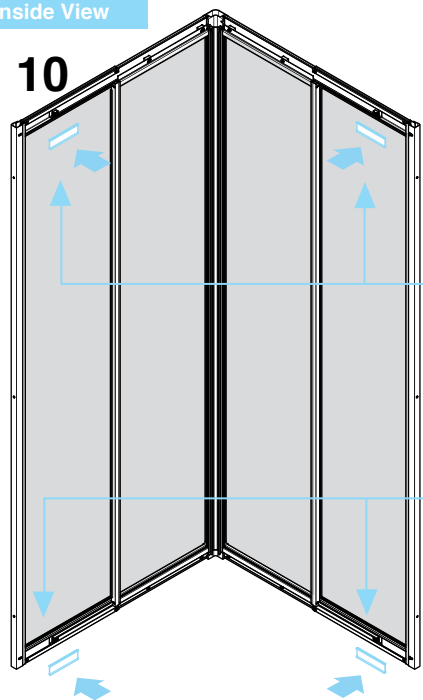

Inside View

10.1

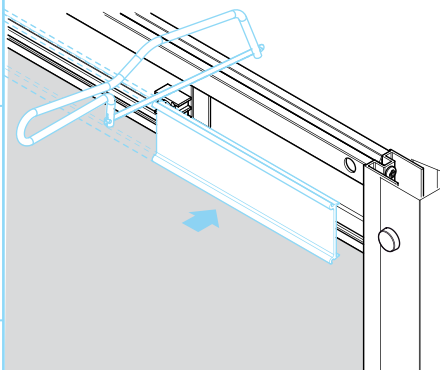


Cut profile infill to suit, push to fit


Inside View



Only apply Silicone Sealant, (not supplied) vertically;
Where Wall Channel meets wall.

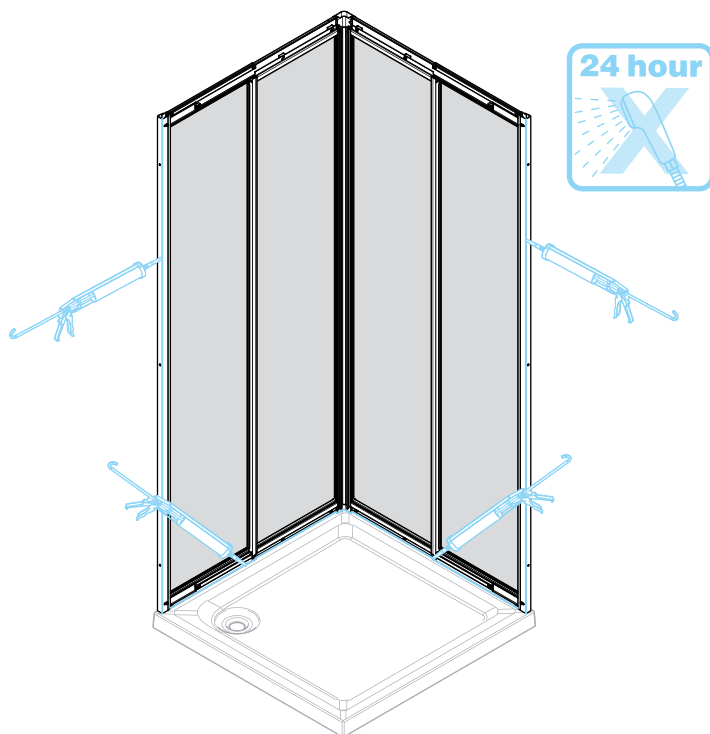

Only apply Silicone Sealant, (not supplied)
horizontally where cill meets tray

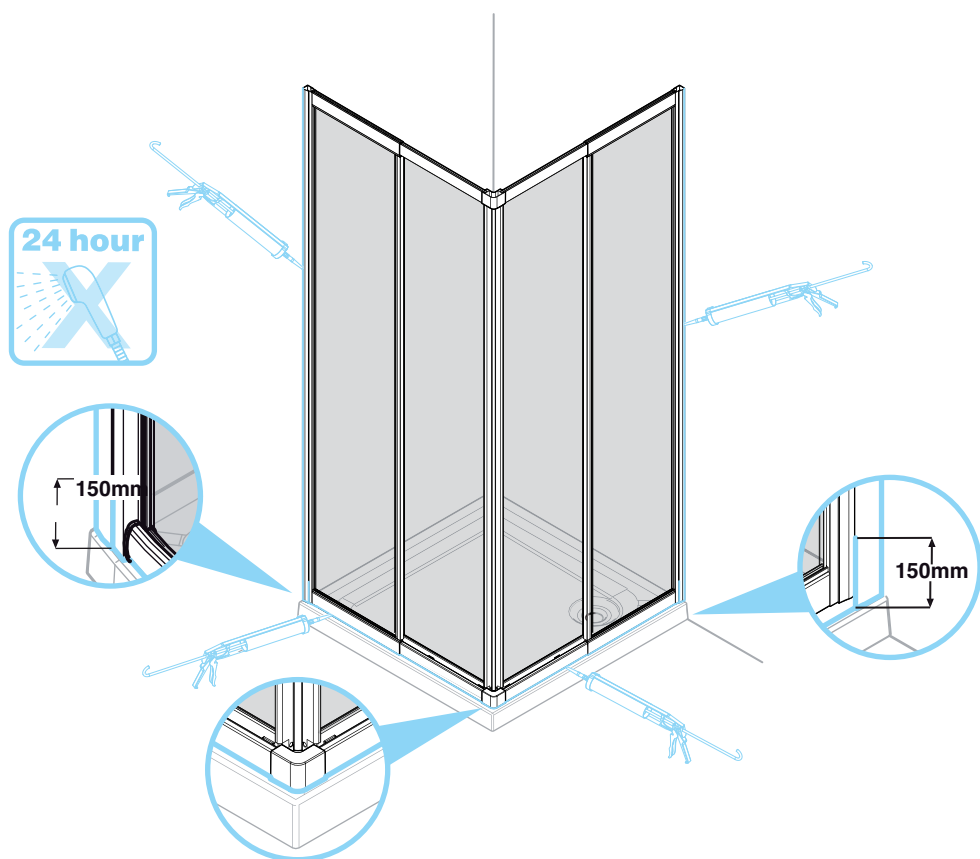

Apply Silicone Sealant, (not supplied).



Product Care:
Use a non-abrasive cleaner.
Water marks may be removed with
a proprietary limescale remover or
household vinegar.