


## EMERGENCY

### LED MAINTAINED EXIT BOX

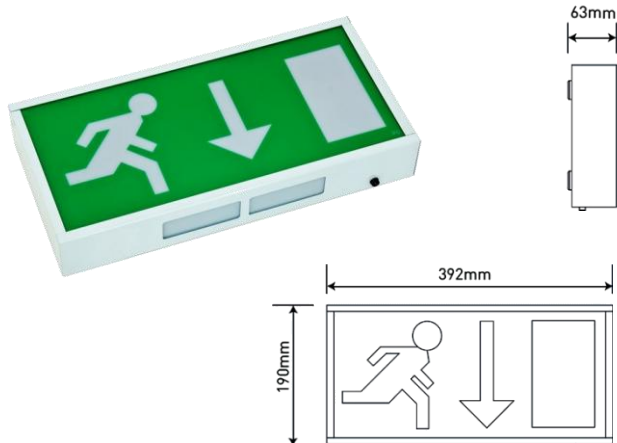

<b>Code: (Includes down arrow legend):</b>	<b>R8EMLED-01</b>
<b>Power Consumption (W):</b>	>3
<b>Batteries (NiCad):</b>	3.6v 1.8Ah
<b>Discharge duration:</b>	>3hrs after 24 hr charge
<b>LED Life L<sub>70</sub> F<sub>10</sub> (hrs):</b>	30,000
<b>Ambient Temperature Range (°C):</b>	+5 ≤ Ta ≤ +25
<b>IP Rating:</b>	20
<b>Guarantee (Yrs):</b>	2
<b>Box Qty:</b>	1
<b>Weight (Kg):</b>	1.4

This LED exit box will satisfy the legal requirement to provide adequate emergency signage in our buildings. For all building types these fittings can be surface mounted on walls or ceilings. They combine the latest SMD LED and electronic driver technology to provide functional, energy efficient fittings. The fitting can be wired in maintained or non-maintained mode and can be switched by photocell if required to save energy while natural light is available.

- Offices
- Hospitals
- Entertainment Venues
- Public buildings
- Schools
- Shops and stores
- Hotels
- Health Centres
- Bars & Restaurants

FEATURES	BENEFITS
<ul style="list-style-type: none"> <li>Large clear running man down arrow legend</li> </ul>	<ul style="list-style-type: none"> <li>Provides a viewing distance of up to 30m for safe exit and</li> </ul>
<ul style="list-style-type: none"> <li>Two downward facing light windows</li> </ul>	<ul style="list-style-type: none"> <li>Provides downward light to illuminate the area below the fitting for safe exit</li> </ul>
<ul style="list-style-type: none"> <li>Pressed steel white powder coated body</li> </ul>	<ul style="list-style-type: none"> <li>Aesthetically pleasing for installation in quality installations</li> </ul>
<ul style="list-style-type: none"> <li>Screwed legend retaining bar</li> </ul>	<ul style="list-style-type: none"> <li>Quick and easy access to termination area for installation</li> <li>Left or right Running Man legend accessory can be quickly inserted</li> </ul>
<ul style="list-style-type: none"> <li>Utilises high quality long life surface mount LED technology:                             <ul style="list-style-type: none"> <li>Provides excellent light output</li> <li>Uses less than 3 watts of power</li> <li>Ensures an average LED life of 30,000 hours</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>Compared to T8 fluorescent:                             <ul style="list-style-type: none"> <li>Comparable light output so is a one for one replacement</li> <li>Makes energy savings of over 60%</li> <li>No maintenance cost for replacement tubes</li> </ul> </li> </ul>
<ul style="list-style-type: none"> <li>4 Screw terminal connection block for maintained or non-maintained wiring options</li> </ul>	<ul style="list-style-type: none"> <li>Optional illumination modes:                             <ul style="list-style-type: none"> <li>Permanently on</li> <li>Automatically switched on by photocell</li> <li>Solely emergency on mains failure</li> </ul> </li> </ul>
<ul style="list-style-type: none"> <li>C/w NiCad rechargeable battery pack with green "charging" status LED</li> </ul>	<ul style="list-style-type: none"> <li>Provides 3 hour emergency operation</li> <li>Provides up to 4 years backup under normal use</li> <li>Indicates when mains power is charging the unit</li> </ul>
<ul style="list-style-type: none"> <li>20mm gland entry points top &amp; rear</li> </ul>	<ul style="list-style-type: none"> <li>Suitable for most wiring installation types</li> </ul>
<ul style="list-style-type: none"> <li>Rear BESA box mounting facility</li> </ul>	<ul style="list-style-type: none"> <li>Mounting on a BESA box where surface conduit supply is used</li> </ul>
<ul style="list-style-type: none"> <li>3 Keyhole slot mounting points</li> </ul>	<ul style="list-style-type: none"> <li>Allows fast and simple installation</li> </ul>
<ul style="list-style-type: none"> <li>2 year guarantee</li> </ul>	<ul style="list-style-type: none"> <li>A quality energy efficient long life product</li> <li>Peace of mind</li> </ul>

PLEASE NOTE – INFORMATION CONTAINED IN THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE