



Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

## Warning

<b>The power supply is Double Insulated and does not require connection to an Earth circuit.</b>	Do not exceed the LED driver load. LED drivers may require a minimum load to operate.
<b>The LED strips are Safety Extra Low Voltage and must not be earthed.</b>	Always disconnect the LED driver from the mains when installing or maintaining this system.
Please read these instructions carefully before commencing any work.	This system contains non-replaceable parts and cannot be serviced. If damage occurs the part should be scrapped.
This unit must be fitted by a competent and qualified electrician.	This product cannot be dimmed.
Install in accordance with IEE Wiring regulations and current Building Regulations.	This product is rated at IP20 and must be situated indoors.
This system operates at Safety Extra Low Voltage (12V), via a LED driver. Never connect the light fittings directly to the mains without using a LED driver.	Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.
Ensure that the supplied LED driver is used.	

## Specification

Dimensions	: 8mm wide, 3mm high, 5m long
Voltage	: 220-240V ~ 50Hz
LED Voltage	: 12V d.c.
Lumens	: 1200 lm

## Kit Contents

This kit contains:-



- 1 x in-line LED driver with UK 3 Pin Plug (0.47m mains cable & 1.5m Output cable)
- 1 x 5000mm strip with 10W SMD 2835

## Layout

- This is a self contained kit and cannot be extended.
- The LEDs are mounted on a sticky tape which can be stuck to most surfaces.
- The LEDs can be shortened to a minimum of 100mm..
- Avoid locating any cables in positions that would cause a hazard. Position cables and LEDs away from areas where they may be at risk from being cut, trapped or damaged.
- This product has no special protection against the ingress of moisture.

## Basic Installation

- Position the plug and in-line LED driver next to the indoor mains outlet socket that the system will connect to. Do not plug-in at this stage.
- After deciding the layout of the LED strip, ensure that the cable is not snagged when in the desired position.
- It is possible for the LED strip to be shortened. This can be done to a minimum of 100mm. Look for the line on the strip with four copper pads with scissors symbol, as shown below in Fig. 1.
- Cut using a sharp pair of scissors. Do not cut anywhere else on the strip as this may cause the LED strip to stop working.
- This unique 'M' shaped LED strip can be easily moulded around corners and bends making for an easy installation (Fig. 2).

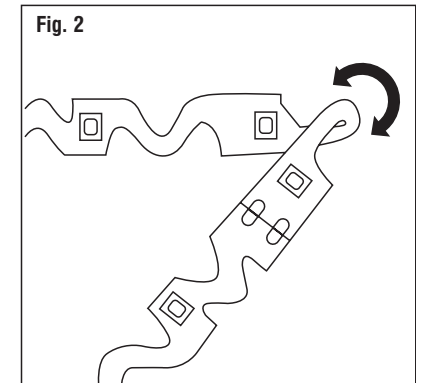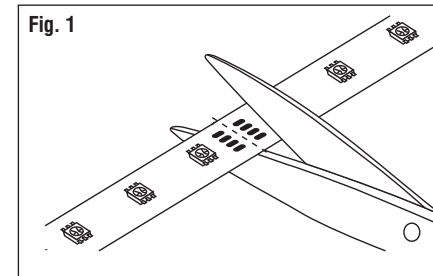

## Commissioning

- Plug in and test.
- Your strip is now ready for use.
- Peel the adhesive backing off of the strips and stick in place.