

TYPHOON™ 325 - FFP2 - VALVED

HORIZONTAL FOLD FLAT MASK OFFERING EXTREMELY LOW BREATHING RESISTANCE, CO₂ BUILD UP, HEAT BUILD UP & MOISTURE BUILD UP

TECHNICAL SPECIFICATION

RESPIRATORY PROTECTION

INSTRUCTIONS FOR USE

Mask must be fitted in accordance with the instructions supplied
 Care must be taken to ensure that the correct mask type is selected for the work to be carried out
 If in doubt as to the type of mask required seek professional guidance

PERFORMANCE


Offers an assigned protection factor (APF) of 10 x Workplace Exposure Limit (WEL) for fine non-toxic dusts, fibres, fumes and mists
 360° Comfort Foam: A foam area around the inside of the mask provides a perfect fit and maximum resistance as well as preventing misting
 Welded Nose Piece: The welded nose piece prevents any irritation, misshaping and a tighter fit
 Latex Free Adjustable Strap: The adjustable strap means it can be fitted comfortably to all head sizes and shapes
 Unique Valve: The silicone valve is unaffected by any moisture, and therefore can be used with the same performance under very low temperatures



MAN MADE FIBRES:
 Horizontal fold flat shape for better fitting and clearer vision as well as convenience and ease of use



VALVE:
 Polystyrene exhalation valve with rubber diaphragm



CLEANING & MAINTENANCE

Not Applicable - Disposable Product
 Store the masks out of sunlight away from chemicals in a dry atmosphere

CONFORMITY & MARKINGS

Meets the FFP2 NR requirements of EN149
 EC Certificate Number 560229, issued by BSi Product Certification
 EN149:2001 + EN149:2009



MANUFACTURING FOR SAFETY
WWW.JSP.CO.UK

UKSALES@JSP.CO.UK
 TEL: +44 (0)1993 826050



TYPHOON™ 325 - FFP2 - VALVED


HORIZONTAL FOLD FLAT MASK OFFERING EXTREMELY LOW BREATHING RESISTANCE, CO₂ BUILD UP, HEAT BUILD UP & MOISTURE BUILD UP

TECHNICAL SPECIFICATION

RESPIRATORY PROTECTION

DIMENSIONS OF OUTER PACKAGING

Quantity: 100 (10 inner packs of 10 masks)
 Weight: 3.5kg (Approx)

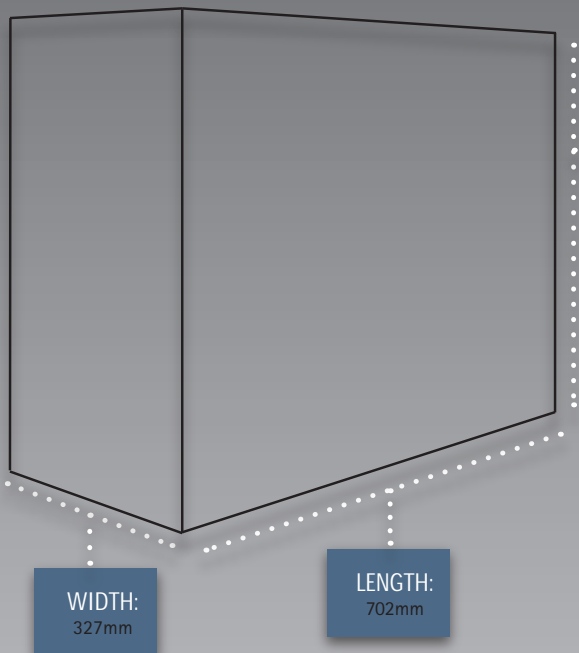

FILTRATION EFFICIENCY	94%
FERROUS METAL FUME	YES
MDF HAND TOOLS	YES
PLASTER	YES
ROCKWOOL	YES
WOOD HARD	YES



DIMENSIONS OF MASK

Length: 84mm
 Width: 175mm
 Height: 110mm
 Weight: 21g (Approx)

LIMITATIONS OF USE

Protection will only be offered if the mask is fitted correctly

The mask, when in contact with the skin may cause allergic reactions to susceptible individuals

If this occurs leave the hazard area, remove mask and seek medical advice

The use by date is printed on the outer packaging

Do not use where exposure to chemical gases may be experienced

Use in well ventilated areas only, which are not deficient in oxygen and do not contain explosive atmospheres

Ensure good seal around the face is created before entering the hazard area

The working life of the mask is nominally one day (this is based on an working day shift of 8 hours), however it may be affected by many factors, including work rate, airflow and concentration of any contaminant in the atmosphere. The mask should be changed immediately if,

- Breathing difficulties due to clogging are experienced,
- Breakthrough of a contaminant is detected by smell, taste or any other means, or
- The mask becomes damaged

This mask is not designed to be worn by people with facial hair



