


## PIR Adjustment

The PIR sensor can be adjusted, allowing the detection distance to be altered to suit the location.

The detection angle is set at 110 degrees.

The duration that the lamp stays on can also be altered from 5 seconds - 5 minutes. Use a small screwdriver to adjust the 'TIME' and 'SENS' screws. Use light pressure when adjusting, as screws can be easily damaged. When adjusting the sensitivity (detection distance) in daylight it will be necessary to cover the sensor to simulate night time.

To access the adjustment screws flip down or rotate the black cover over the PIR sensor.

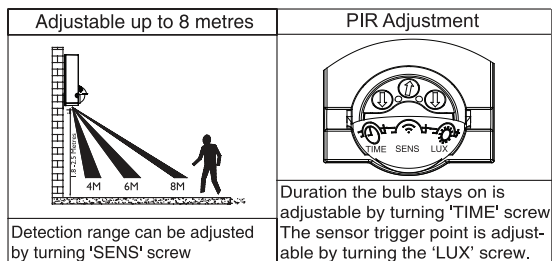

## Fitting/replacing bulbs

- Fitting/Replacing the bulbs - 1 x MAX 28W E27 Eco GLS. Suitable for use with LED bulbs.
- Always allow the bulb to cool before touching. Fit the recommended bulbs.
- Do not exceed the recommended wattage or use a different shape of bulb as this may cause your light fitting to overheat.

## Cleaning

We recommend cleaning with a soft dry cloth.

Do not use solvents or abrasive cleaners as these could damage the finish.

Glass parts – Wipe clean with a damp cloth. Do not use abrasive materials as these will damage the finish.

## Recycling advice




Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice. The packaging on this product can also be recycled.

## Safety information

For your safety, always switch off the supply before changing lightbulbs, or cleaning.

The glass shade must be replaced if it becomes cracked or damaged.

Do not use product without glass shade attached.



### UK Manufacturer:

Kingfisher International Products Limited,  
3 Sheldon Square, London, W2 6PX,  
United Kingdom.

### EU Manufacturer:

Kingfisher International Products B.V.  
Rapenburgerstraat 175E,  
1011 VM Amsterdam, The Netherlands.

14/05/2021

## Instruction leaflet

# Outdoor Rectangular Black Frame Lantern with PIR

338PG



Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

## Warning

### This is a Class 1 product and must be earthed.

This product is only suitable for connection to a 240V~50Hz supply in accordance with current IEE wiring regulations. It should be installed in accordance with local building regulations.

This product is IP44 rated and is suitable for outdoor use.

Before installing your light fitting always switch off the mains supply and remove the appropriate fuse or switch off the appropriate circuit breaker before commencing installation.

This product contains glass so care must be taken when fitting or handling to prevent personal injury or damage to the product. If replacing an existing fitting, make a careful note of the connections.

This product is suitable for installation on surfaces with normal flammability e.g. wood, masonry. It is not suitable for use on highly flammable surfaces or in flammable atmospheres.

Never put anything on the product or hang anything on any part of this product.

Never fit bulbs of a higher wattage than those specified on the label, as these may cause overheating and damage the fitting. This product is dimmable when used with a dimmable bulb.

If you are in any doubt about your competence please consult a qualified electrician.

If any modification is made it will invalidate the warranty and may render the product unsafe.

Keep children and animals away from the assembly area.

This fitting contains small parts that could cause choking if swallowed.

Keep all plastic wrapping materials away from children to avoid danger of suffocation.

Ensure that all packaging is disposed of carefully and responsibly.

## Specification

Voltage: 240V 50Hz

IP rating: 44

Lamp: Max. 1 x 28W E27 Eco GLS

## Fixing Instructions

Make sure you have the following items which are required to install this light fitting:

- Selection of cross and flat head screwdrivers.
- Electric drill and assorted drill bits.

- Wire strippers.
- Insulation tape.

## Installation

Existing fittings must be completely removed before installation of a new product. Before removing the existing fitting, carefully note the position of each set of wires. Note that the switch is turned off before installation. Ensure that the screws and cable entry points are sealed to maintain the IP rating of the product.

After deciding the layout of the light fittings ensure that the cables are long enough to connect to desired positions.

Ensure the wall is capable of holding the weight of the product. Take care to avoid damaging any concealed wiring and pipes. The correct fixings should be used for brick, cavity walls or plasterboard.

- Remove the fixing bracket by undoing the 2 screws (8) to remove the shade (7), retain these for re-use. Then undo screws (5) to release the bracket.
- Using the fixing bracket as a template, mark the position of the mounting holes. Drill holes and fit supplied wall plugs (1) (suitable for masonry only - for other surfaces use appropriate fixings). Take care not to damage any wiring or pipes when drilling the holes.

- Secure the fixing bracket to the wall using the screws (2) and fixings supplied. Ensure the wall is capable of holding the weight of the product.
- Support your fitting and connect the house wiring to the terminal block (3). **NOTE: This is a Class I fitting and must be earthed.** See Wiring Details. Make sure grommet is still in place to maintain IP rating.
- Refit the product to the fixing bracket and secure with screws (5) removed in Point 2.
- Fit the bulb (6). Max 28W E27 Eco GLS. **NOTE: Never fit bulbs of a higher wattage than those specified on the label (as these may cause overheating and damage the fitting).**
- Attach the shade (7) to the light fitting using small screws provided (8) and tighten to secure.
- Your light is now ready for use.

