

Treviso Bathroom Light Installation Instructions

This product is IP44 rated and must only be used with the shade attached.

These instructions on wiring and installation are provided as a guideline to assist you. **If at any time you are unsure of how to proceed, please consult a qualified electrician.**

Before Starting

Please read through these instructions before commencing work, and keep them for future reference.

Please Take Extreme Care When Carrying Out These Instructions.

Important!

This light fitting must be connected to the supply earth. If your lighting circuit does not have an earth, ask a qualified electrician to provide an earth facility. Light fittings should be connected to a 5 amp fused circuit. This light fitting is suitable for indoor use only. **WARNING: THIS PRODUCT GETS VERY HOT DURING USE.**

Always switch off and allow product to cool before changing the bulbs, cleaning or adjusting.

Warning!

Always switch off electricity supply at the mains during installation and maintenance. We recommend that the fuse is withdrawn or the circuit breaker is switched off whilst work is in progress. Do not just turn off at the wall switch.

Install in accordance with the IEE Wiring regulations and the Building Regulations.

Fixing Instructions

Make sure you have the following items which are required to install this light fitting:


Small electrical screwdriver, cross head screwdriver & insulation tape.

Installation:

This product has special protection against the ingress of moisture and is IP44 rated.

This product is suitable for use in Zone 2 and outside Zones of a bathroom.

If this unit is being fitted in a room containing a bath or shower, a 30mA RCD must be used - in accordance with IEE regulations

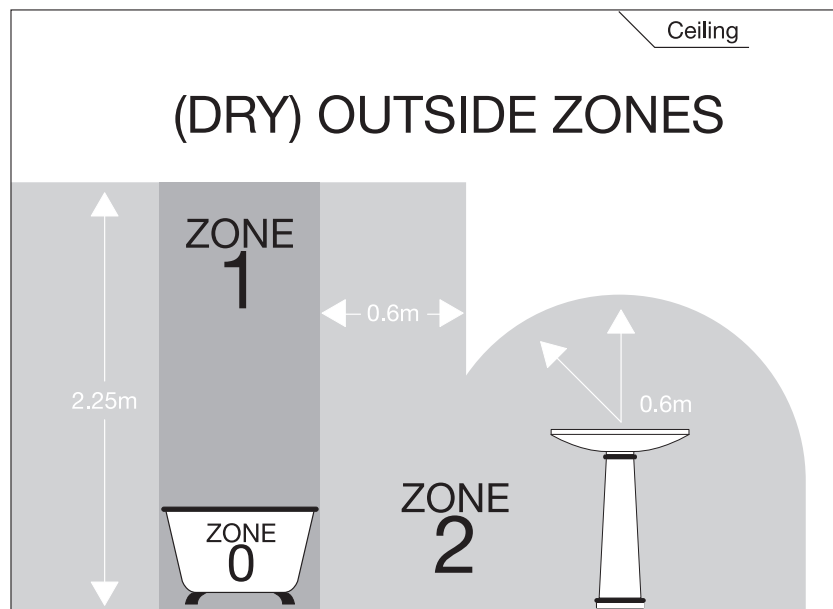

Step 1


Existing ceiling roses must be completely removed before installation of a new product. Before removing the existing fitting or ceiling rose, carefully note the position of each set of wires.

Step 2

Locate the ceiling plate to the ceiling, ensure there is a joist at the point of fixing to support the weight of the product, mark the position of the fixing holes. Attach the ceiling plate to the ceiling using the screws and rubber washers supplied. Take care to avoid damaging any concealed wiring and pipes.

Step 3

Having identified the household wiring from your existing light fitting, connect to the connection block inside the product in the following way (see diagram). Feed the supplied heat sleeving tubes over incoming wires to provide insulation from heat.

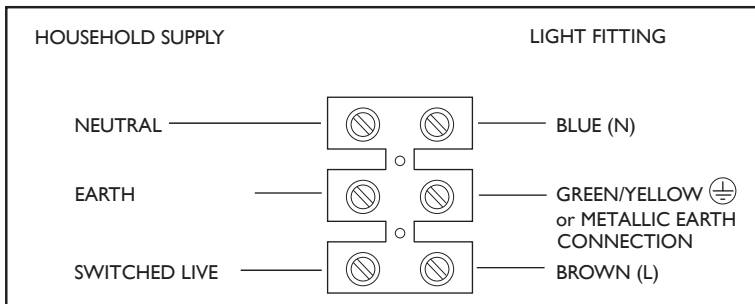

Check that.....

You have correctly identified the house wires.

The connections are tight.

No loose strands have been left out of the connection block.

Step 4


When completed, ensure that there are no bare or loose strands of wire exposed.

Fitting/Replacing the bulb

Bulb type - 40W Max E14 Candle bulb or energy saving bulb. When changing a bulb, always switch off at the mains and allow the bulb to cool before handling. Dispose of used bulbs carefully. Do not exceed the wattage stated or use a different shape bulb from that indicated on the fitting. Some energy saving bulbs are not suitable for use with a dimmer switch.

Attaching the Shade

Place shade (B) over the ceiling plate and pinching together clips (C), carefully locate into fixing slots (A) to hold shade in place. Do this for each clip. Ensure the tabs on the end of the clips engage firmly in the slots to securely fix the shade.

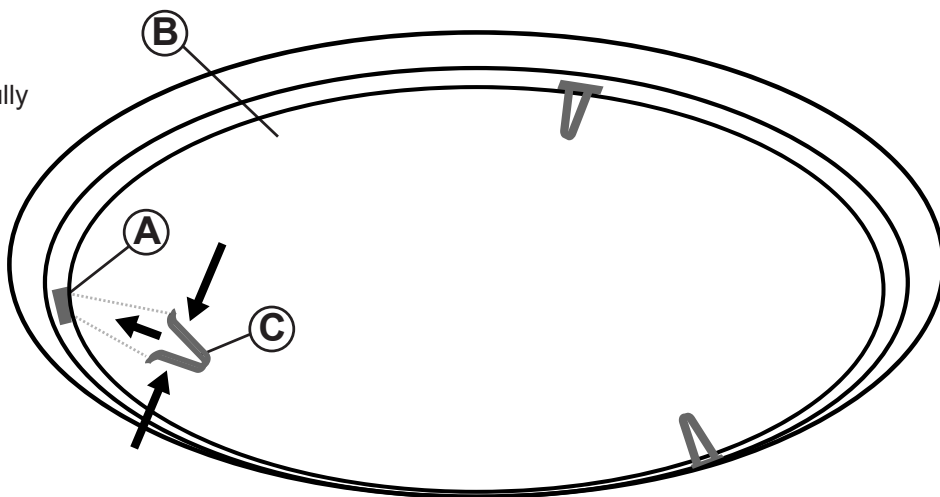


Step 5

Replace fuse or circuit breaker and switch on. Your light is now ready for use.

Glass Shade

The glass shade must be replaced if it becomes cracked or damaged. Do not use product without glass shade attached.



Care and cleaning

Finish - We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will damage the finish. Glass parts - Remove and wash in warm water or just use a damp cloth. Do not use abrasive materials as these will damage the finish.

Safety Information

For your safety, always switch off the supply before changing lightbulbs, cleaning or removing shades. Always take care when handling glass parts and lightbulbs to avoid injury in case of breakage.



Waste electrical products should not be disposed of with normal household waste.

Please recycle where facilities exist. Check with your Local Authority for recycling advice.

Manufactured by: Poole Lighting Ltd.

UK: BH17 7BY

EU: Brilliant AG, Brilliantstrasse 1, D-27442 Gnarrenburg