



**Platinum Wiring Accessories**  
**Fitting and wiring Instructions -**

- 1). Before commencing work switch off the power supply by removing the fuse in the fuse box, or should isolate at main switch as neutral is a live conductor.
- 2). If unit is to be used as a replacement for an existing product, remove existing unit from its location and disconnect the wiring.
- 3). Certain items in the range will not fit into a 4 lug box. If such a box has been previously installed the top and bottom lugs should be removed or bent back to avoid contact with the interior.
- 4). Remove the metal front plate of the new unit by inserting a small screwdriver into the slot/s in the bottom of the plate and lift away from the unit.  
 Note - On toggle switches the finger tight locknut and transit 'O' ring must be removed before removing the plate.
- 5). Connect the wires as shown in appropriate wiring diagrams below and overleaf. Use green/yellow sleeving on earth conductors not insulated. Ensure terminals are properly tightened and no bare wire is visible. Push back units into mounting box making sure conductors are not trapped.
- 6). Screw the grid plate to the mounting box: do not over tighten the fixing screws. Align the 2 studs on the back of the metal front plate with the corresponding holes in the grid plate and push firmly into position.  
 Note - On toggle switches assemble the locknut to finger tightness.
- 7). To reduce the risk of discolouration or tarnishing, avoid installation on wet plaster.
- 8). These products must be installed in accordance with the latest Building and IEE wiring regulations.  
 If in any doubt, please contact a qualified electrician.


**1 GANG 1 WAY 10AX TOGGLE SWITCH**

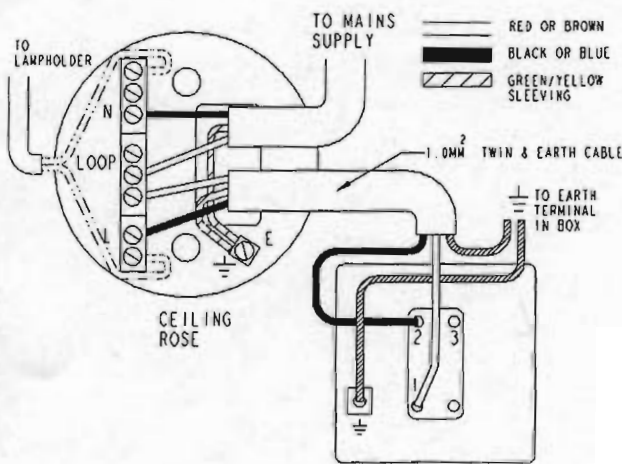

**1 GANG 2 WAY 10AX TOGGLE SWITCH**

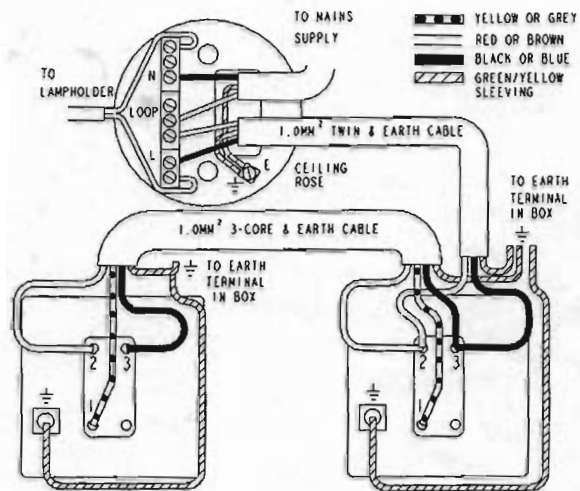

**2 GANG 2 WAY 10AX TOGGLE SWITCH**

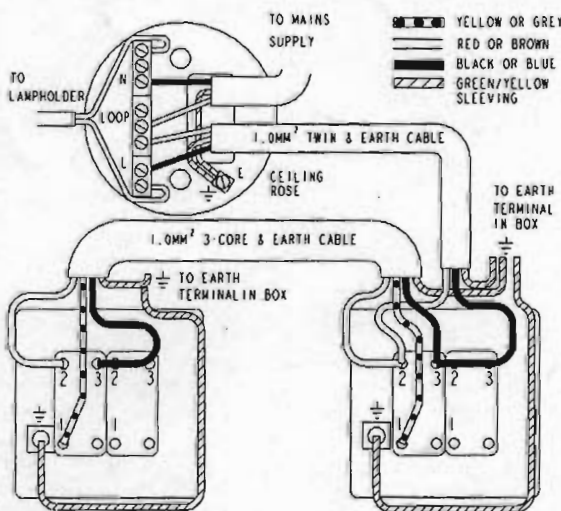

**SHAVER UNIT**

**IMPORTANT - THIS CIRCUIT MUST BE PROTECTED BY A 5A FUSE**

