



Fitting and wiring Instructions –

- 1) Before commencing work switch off the power supply by removing the fuse in the fuse box, or switch off circuit breaker in the consumer unit.
- 2) If unit is to be used as a replacement for an existing product, remove existing unit from its location And disconnect the wiring.
- 3) Certain items in the range will not fit into a 4 lug box. If such a box has been previously installed the North South lugs should be removed or bent back to avoid contact with the interior.
- 4) Remove the metal front plate of the new unit by –
For Flatplate – Unscrew the two small fixing screws.
For Low Profile – By inserting a small screwdriver into the slot/s in the plate and lifting away from the unit.
- 5) Connect the wires as shown in appropriate wiring diagrams below and overleaf. Use green/yellow sleeving on earth conductors not insulated. Ensure terminals are properly tightened and no bare wire is visible. Push back units into mounting box making sure conductors are not trapped.
- 6) For Flatplate – Screw the grid plate to the mounting box so that its front face is flush with the wall.
Assemble the metal front plate using the small fixing screws.
For Low Profile – Screw the grid plate to the mounting box; do not over tighten the fixing screws. Align the 2 studs on the back of the metal plate with the corresponding holes in the grid plate and push firmly into position.
- 7) To reduce the risk of discolouration or tarnishing, avoid installation on wet plaster.
- 8) These products must be installed in accordance with the latest Building and IEE wiring regulations. If in any doubt, please contact a qualified electrician.


6A FAN ISOLATOR WITHOUT TIMER

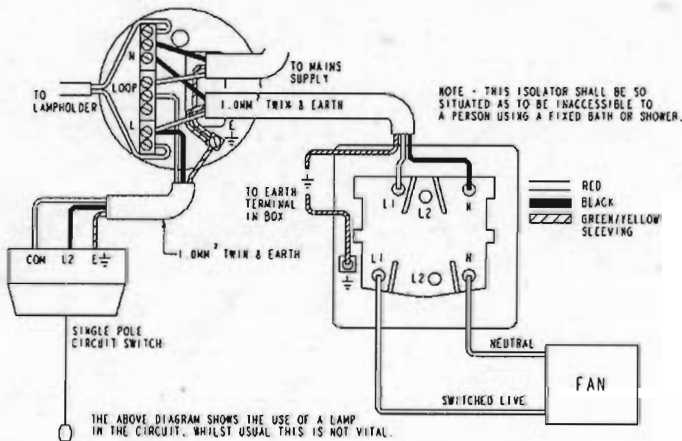

6A FAN ISOLATOR WITH TIMER

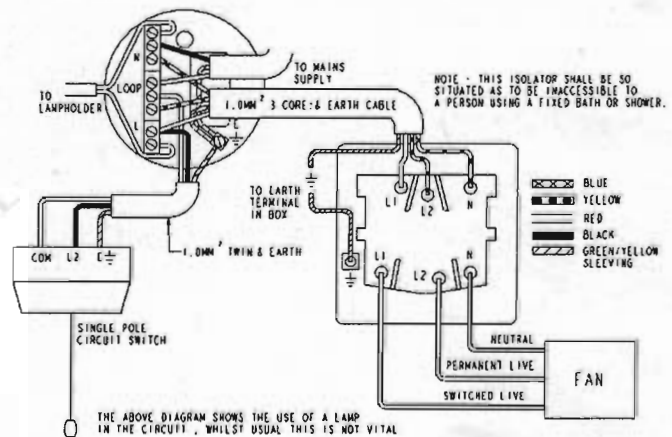

10AX INTERMEDIATE SWITCH

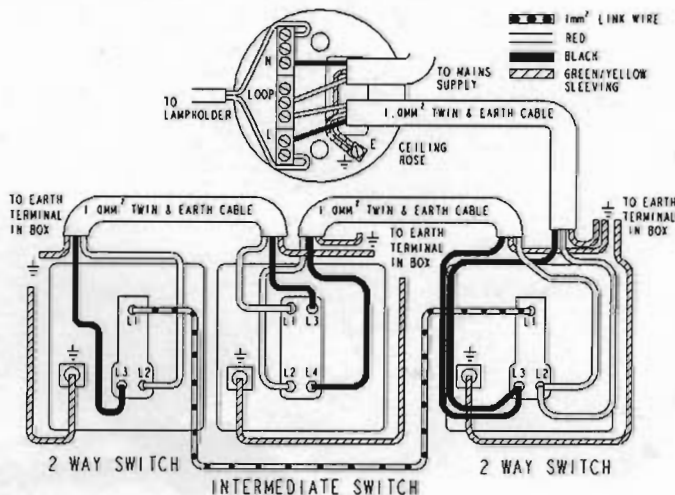

1 AND 2 GANG BLANKING PLATES

If using the blank plate to cover the position of an existing accessory and continuity of circuit is required: then ensure that the live wires are connected together in a suitably sized terminal block and neutral wires connected in a separate suitably sized terminal block. If continuity of circuit is no longer required: then preferably remove the load cable from the mounting box and terminate the circuit live and neutral wires separately into suitably sized terminal blocks. If the load cable cannot be removed then terminate live and neutral wires into separate terminal blocks. In both cases for added safety the terminal blocks should be covered with PVC electrical insulation tape. Using a green/yellow sleeved copper wire the grid earth terminal must be connected to the earth terminal in the fixing box. All other earth wires must be sheathed with green/yellow sleeving and connected to the earth terminal in the mounting box. In all instances, it is important that earthing circuit is maintained.