


## ASSEMBLY OF SEMI PEDESTAL (Screw, Adjustable Type)




1  
Fit the tap and the waste to the basin in accordance with the instructions supplied with them. Secure the basin to the wall using suitable fixings. Ensure that the basin is level. Connect the tap and waste to the water supplies and waste system and check for leaks.

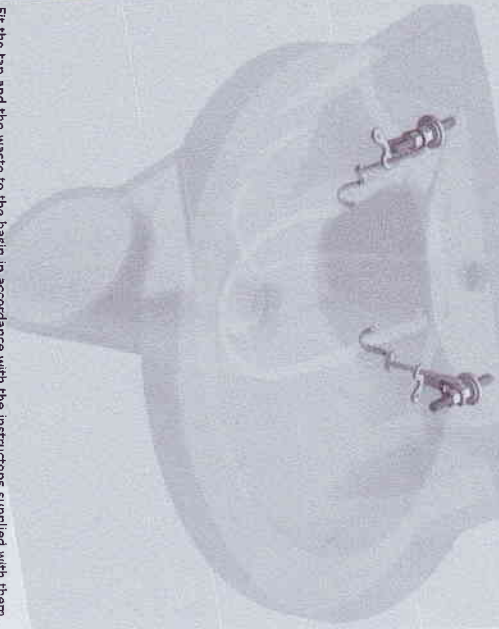


4  
Offer the semi-pedestal up to the basin. Hook the pedestal hooks into the holes cut into the sides of the semi-pedestal.


## Assembly Kit Adjustable Pulling Type

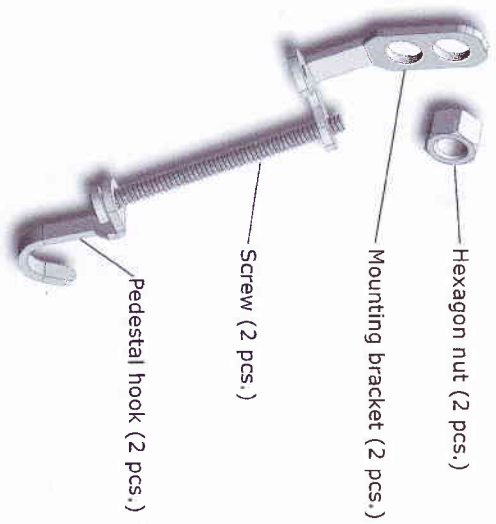


2  
Screw the pedestal hooks and screws into the mounting brackets as shown in the diagram.

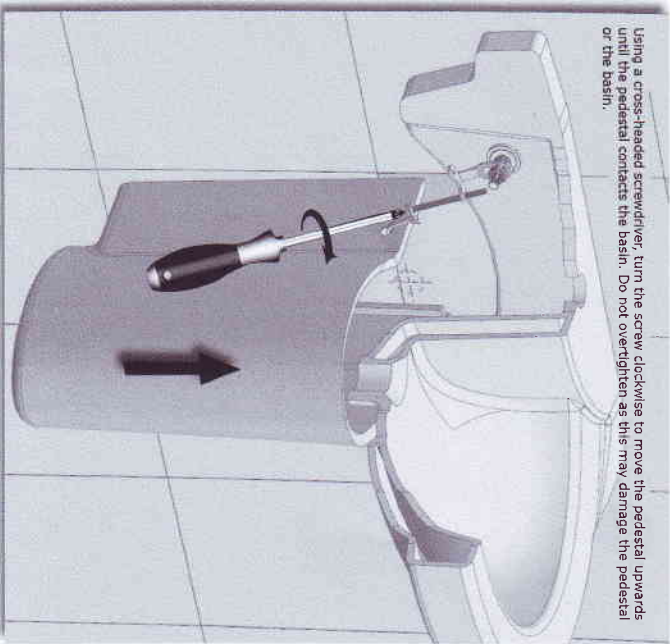

5  
Using a cross-headed screwdriver, turn the screw clockwise to move the pedestal upwards until the pedestal contacts the basin. Do not over-tighten as this may damage the pedestal or the basin.

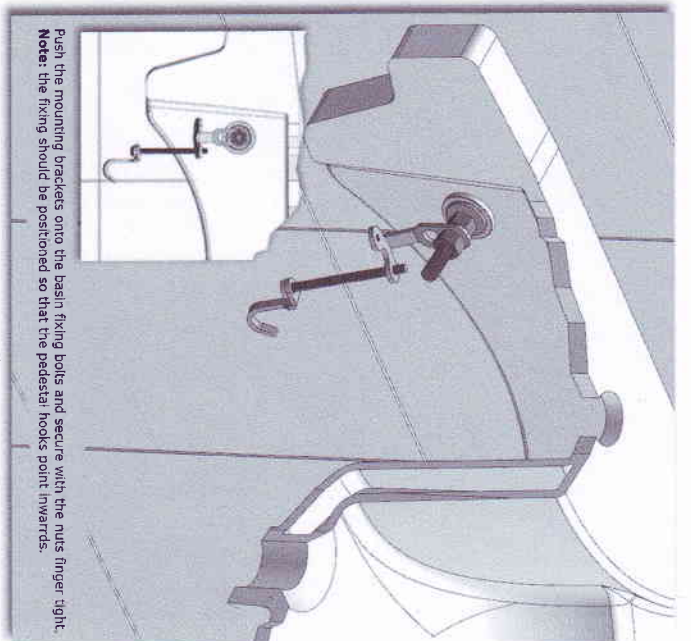

3  
Push the mounting brackets onto the basin fixing bolts and secure with the nuts finger-tight. **Note:** the fixing should be positioned so that the pedestal hooks point inwards.

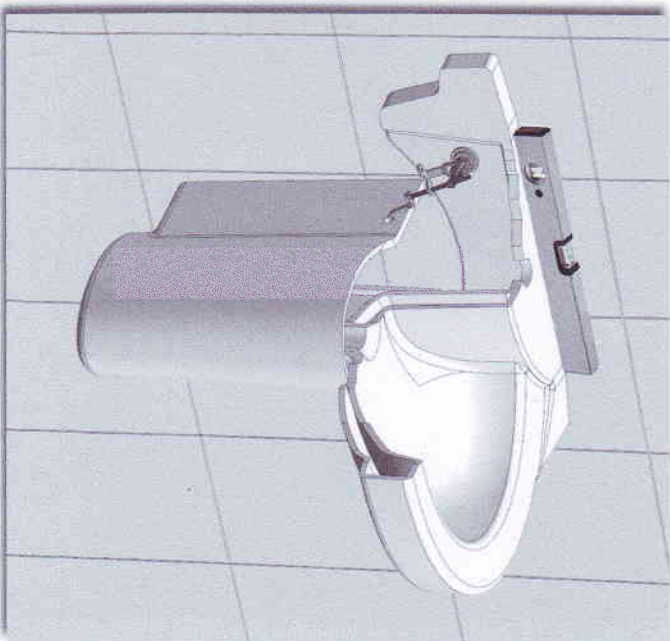

6