


## 300mm Access Panel

CODE GL300

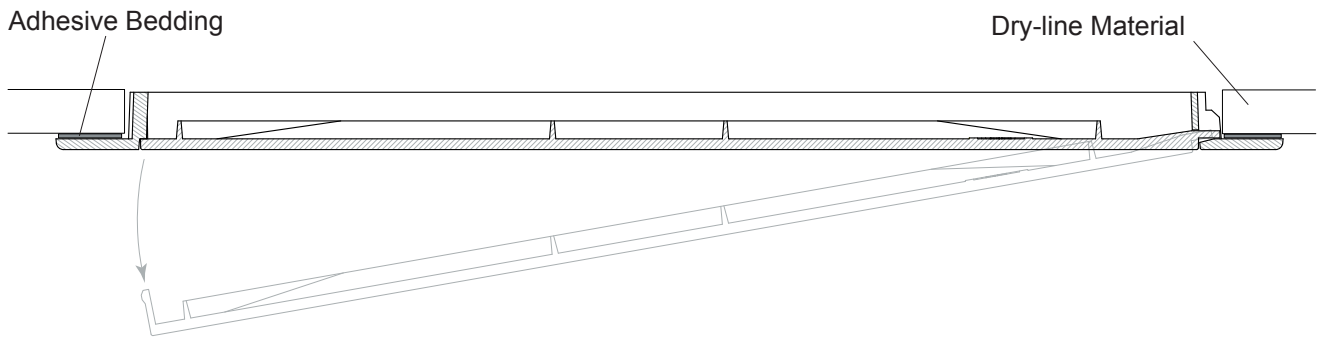

### Installation:

To install, prepare a slightly oversized 300mm square hole in the dry-line material in front of the detail you wish to access. Run a bead of a suitable adhesive all around the backside of the frame. With the door securely fastened within the frame, insert the whole panel into the previously prepared hole and press firmly against the surface of the wall. Remove any excess adhesive which has seeped from behind the frame and leave to set.


### Description:

The GL300 Access Panel Provides a cost effective solution for easy access to hidden building services behind a ceiling or wall. The panel is predominantly used in domestic household situations for access to:-

- Electrical Wiring Systems
- Fuse Boxes / Switches
- Controls / Connection Links
- Valves / Stopcocks / Plumbing

The product is lightweight, easy to fit and is manufactured in High Impact Polystyrene. This allows a textured finish that can be painted over if required.

The GL300 door is hinged along one side and can be completely removed for easy and convenient access.

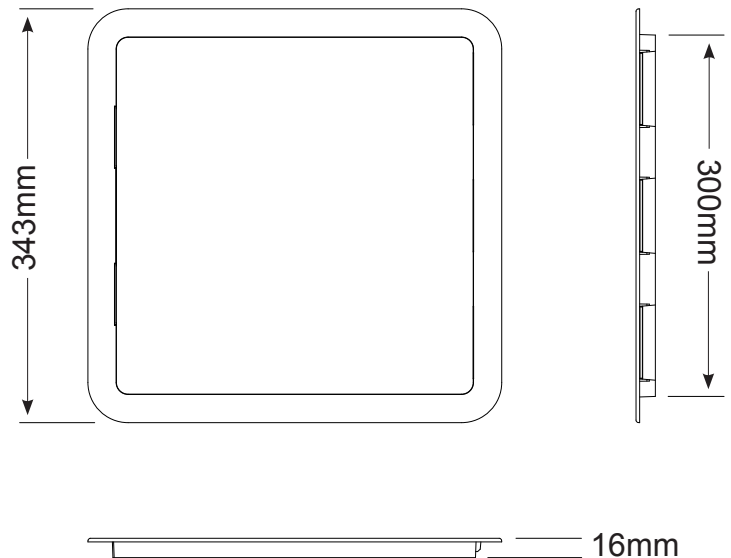

PACKING DETAILS	Packed in boxes of 1 or boxes of 10 items
MATERIAL	High Impact Polystyrene
WEIGHT	Box of 1 - 0.56 kg Box of 10 - 5.04 kg
COLOUR	White

MANTHORPE BUILDING PRODUCTS LTD  
MANTHORPE HOUSE  
BRITTAIN DRIVE  
CODNOR GATE BUSINESS PARK  
RIPLEY  
DERBYSHIRE DE5 3ND

TEL: 01773 514 200  
FAX: 01773 514 262  
EMAIL: sales@manthorpe.co.uk  
WEB: www.manthorpe.co.uk

DRN M.R Date 22.06.07

The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.

DRG No

**MBP 8237**

Issue

**B**