

Technical: wiring accessories

Lisse Screwless Deco

Fused connection units



GGBL5000WSS



GGBL5010WSS



GGBL5011WSS

Description

A high quality range of fused connection units designed for both residential and commercial installations. This family of products benefits from all of the time and space saving design features of the Lisse Screwless Deco range.

Features & benefits

- Large plate footprint provides extra strength and reduces the need for additional decorating.
- 7mm raised edge offers easy installation for new buildings and retrofits.
- Lockable fuse carrier for peace of mind.
- LED indicator* when power indication is needed. (* Only applicable to certain references.
- Minimum back projection frees up space in the back box for cabling.
- One and two gang spacers available for added installation depth.
- Backed out and captive screw terminals to allow for positive drive and speed of installation.
- Cable markings on all products with a moulded template to check the wire stripped length.
- Light grey back moulding colour for easier terminal identification.
- Square caged terminals with generous cable capacity.

Technical specifications	
Voltage rating:	240V 50Hz
Current rating:	13A
Terminal capacity: (no. of cores to each terminal hole)	1.0mm ² 8 (earth only) 1.5mm ² 5 (earth only) 2.5mm ² 5 4.0mm ² 3 6.0mm ² 2 10mm ² 1 16mm ² 1
Dimensions:	87 x 87mm
Operating temperature:	-5°C to 40°C *Average value over 24h not exceeding 25°C
Mounting box depth:	25mm
Fixing screws:	M3.5 x 25mm
Standard of compliance:	BS 1363


Technical: wiring accessories

Lisse Screwless Deco

Fused connection units

Part code structure

- 10 Plate switches
 - 20 20AX switches & flex outlets
 - 30 Sockets
 - 40 50A switches & 45A control units
 - 50 Fused connection units
 - 60 Dimmers
 - 70 Shaver sockets & data communication
 - 80 Blank plates
- SS Stainless Steel
 - PC Polished Chrome
 - MB Mocha Bronze
 - SB Satin Brass
 - PB Polished Brass
 - PW Painted White
 - LC Light Copper

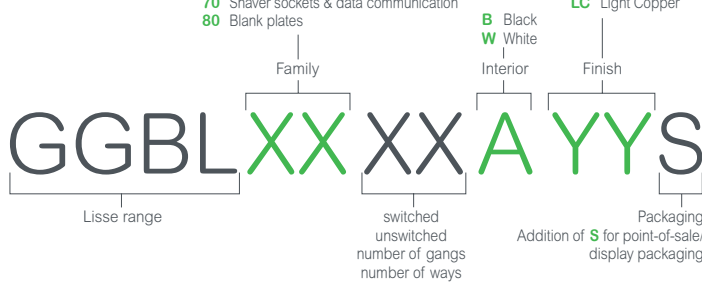


Range

Fused connection units	
Unswitched	
GGBL5000AYY(S)	FCU - 13A
GGBL5003AYY(S)	FCU - Flex outlet - 13A
DP switched	
GGBL5010AYY(S)	FCU - 13A DP
GGBL5013AYY	FCU - Flex outlet - 13A DP with LED indicator
GGBL5011AYY	FCU - LED indicator - 13A DP

Steel mounting boxes	
SB251	1 gang 25mm deep
SB351	1 gang 35mm deep

Dimensions

1 gang



Configuration, packaging type and stock availability

Finishes	Inserts	Packaging option	Stock availability
Stainless Steel (SS)	White	Standard box	MTS
	Black	Shelf ready box & display packaged	MTS
Polished Chrome (PC)	White	Standard box	MTS
	Black	Standard box	MTS
Satin Brass (SB)	White	Standard box	MTO
	Black	Standard box	MTS
Mocha Bronze (MB)	White	Standard box	MTS
	Black	Shelf ready box & display packaged	MTS
Painted White (PW)	White	Standard box	MTO
	Black	Standard box	MTS
Polished Brass (PB)	White	Standard box	MTO
	Black	Standard box	MTO
Light Copper (LC)	White	Standard box	MTO
	Black	Standard box	MTS

MTO = made to order
MTS = made to stock