

Technical: wiring accessories

Lisse Screwless Deco


Plate switches



GGBL1012BSS



GGBL1032BSS



GGBL1042BSS

Description

A high quality range of plate switches designed for both residential and commercial installations. This family of products benefits from all of the design features of the Lisse Screwless Deco range such as time and space saving solutions, as well as a comprehensive array of installation-friendly aspects.

Fully manufactured in accordance with latest British & International Standards and third party certified.

Features & benefits

- Large plate footprint provides extra strength and reduces the need for additional decorating.
- Ergonomic design with consistent plate profiles throughout the range, allowing accessories to be mounted adjacently.
- 7mm raised edge offers easy installation for new buildings and retrofits.
- Minimum back projection frees up space in the back box for cabling.
- One and two gang spacers available for added installation depth.
- Backed out and captive screw terminals to allow for positive drive and speed of installation.
- Printed terminals for easier identification.
- Cable markings on all products with a moulded template to check the stripped wire length.
- Secured fixing screws to limit the risk of loss.
- Light grey back moulding colour for easier terminal identification.
- Square caged terminals with generous cable capacity.

Technical specifications	
Voltage rating:	240V
Current rating:	16AX
Terminal capacity: (no. of cores to each terminal hole)	1.0mm ² 5 1.5mm ² 3 2.5mm ² 1
Dimensions:	87 x 87mm (1-3 gang) 87 x 148.5mm (4 gang)
Operating temperature:	Ambient temperatures not normally exceeding 25°C but occasionally reaching 35°C
Mounting box depth:	16mm (1-2 gang) 25mm (3-4 gang)
Fixing screws:	M3.5 x 18mm


Technical: wiring accessories

Lisse Screwless Deco

Plate switches

Part code structure

- 10 Plate switches
 - 20 20AX switches & flex outlets
 - 30 Sockets
 - 40 50A switches & 45A control units
 - 50 Fused connection units
 - 60 Dimmers
 - 70 Shaver sockets & data communication
 - 80 Blank plates
- SS Stainless Steel
 - PC Polished Chrome
 - MB Mocha Bronze
 - SB Satin Brass
 - PB Polished Brass
 - PW Painted White
 - LC Light Copper

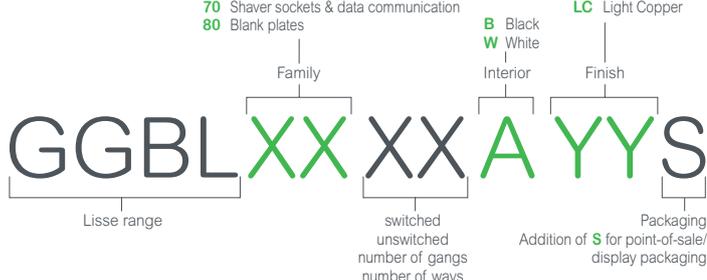


Range

Plate switches	
GGBL1014AYY(S)	Control switch - 1 gang intermediate - 10AX
GGBL1012AYY(S)	Plate switch - 1 gang 2 way - 10AX
GGBL1022AYY(S)	Plate switch - 2 gang 2 way - 10AX
GGBL1032AYY(S)	Plate switch - 3 gang 2 way - 10AX
GGBL1042AYY(S)	Plate switch - 4 gang 2 way - 10AX
GGBL1012RAYYS	Retractive switch - 1 gang 2 way - 10A


Steel mounting boxes	
SB161	1 gang 16mm deep
SB252	2 gang 25mm deep
SB352	2 gang 35mm deep

Wiring circuits

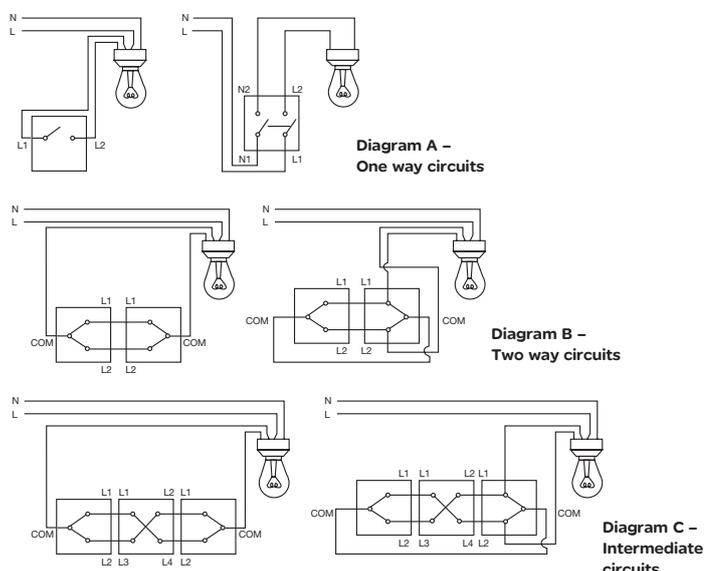


Dimensions

1-3 gang



4 gang

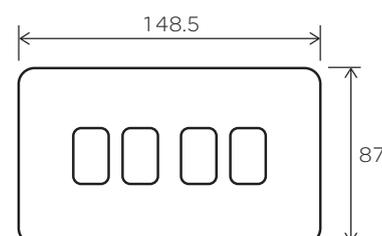

Configuration, packaging type and stock availability

Finishes	Inserts	Packaging option	Stock availability
Stainless Steel (SS)	White	Standard box	MTS
	Black	Shelf ready box & display packaged	MTS
Polished Chrome (PC)	White	Standard box	MTS
	Black	Standard box	MTS
Satin Brass (SB)	White	Standard box	MTO
	Black	Standard box	MTS
Mocha Bronze (MB)	White	Standard box	MTS
	Black	Shelf ready box & display packaged	MTS
Painted White (PW)	White	Standard box	MTO
	Black	Standard box	MTS
Polished Brass (PB)	White	Standard box	MTO
	Black	Standard box	MTO
Light Copper (LC)	White	Standard box	MTO
	Black	Standard box	MTS

MTO = made to order
MTS = made to stock