

Technical: wiring accessories

Lisse Screwless Deco

USB sockets



GGBL30102USBABSSS



GGBL30202USBABSSS

Description

A high quality range of Lisse Screwless Deco USB sockets. Designed for both residential and commercial installations, benefiting from all of the design features of the Lisse Screwless Deco range. Charges a multitude of devices with USB connection.

Fully manufactured in accordance with latest British & International Standards and third party certified.

Features & benefits

General

- Lisse Screwless Deco metal finish for a rounded edge profile.
- 2 gang single pole switched socket with outboard rockers.
- Twin earth terminals as standard for the 2G USB sockets, enabling high integrity earthing.

Installation

2 gang USB sockets:

- 25mm mounting box depth, without spacer.

1 gang USB sockets:

- 25mm mounting box depth, with spacer or 35mm mounting box without spacer.

USB

- 2 x Type A USB sockets – 2.1A total output, 5V.
- Module has over current and short circuit protection.
- The USB module is always powered on, charging even when the switches are off.
- Smartchip technology to charge across a wide range of mobile devices and tablets.

Technical specifications	
Voltage rating:	240V
Socket current rating:	13A
USB output:	2.1A, 5V
Terminal capacity:	Live, neutral and earth 3 x 2.5mm ² 3 x 4mm ² 2 x 6mm ² stranded
Dimensions:	87 x 148.5mm Front plate thickness 14mm
Operating temperature:	0°C to 45°C (not to exceed an average of more than 25°C in any 24 hour period)
IP rating:	IP2X
Mounting box depth:	1G = 25mm with spacer or 35mm without spacer 2G = 25mm without spacer
Fixing screws:	M3.5 x 25mm
Standard of compliance:	BS 1363-2 BS EN 60950


Technical: wiring accessories

Lisse Screwless Deco

USB sockets

Part code structure

- 10 Plate switches
 - 20 20AX switches & flex outlets
 - 30 Sockets
 - 40 50A switches & 45A control units
 - 50 Fused connection units
 - 60 Dimmers
 - 70 Shaver sockets & data communication
 - 80 Blank plates
- SS Stainless Steel
 - PC Polished Chrome
 - MB Mocha Bronze
 - SB Satin Brass
 - PB Polished Brass
 - PW Painted White
 - LC Light Copper

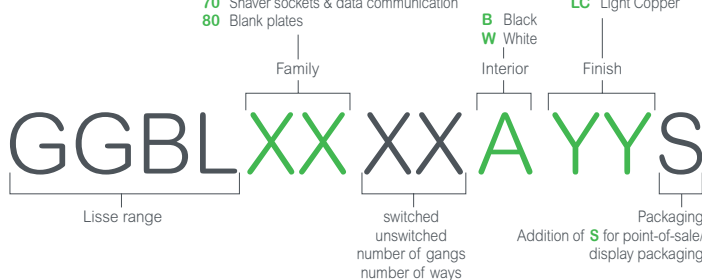

Range

USB sockets	
GGBL30102USBAAYYS	Switched Socket - 1 gang - 13A SP 2USB
GGBL30202USBAAYYS	Switched Socket - 2 gang - 13A SP 2USB

Shelf frames	
GGBLSHF1GS	1 gang surround with shelf - White
GGBLSHF1GBS	1 gang surround with shelf - Black
GGBLSHF2GS	2 gang surround with shelf - White
GGBLSHF2GBS	2 gang surround with shelf - Black


Steel mounting boxes	
SB251	1 gang 25mm deep
SB252	2 gang 25mm deep




USB switched socket available with shelf frame

Dimensions

1 gang



2 gang

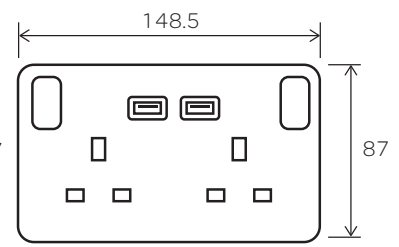

Configuration, packaging type and stock availability

Finishes	Inserts	Packaging option	Stock availability
Stainless Steel (SS)	White	Standard box	MTS
	Black	Shelf ready box & display packaged	MTS
Polished Chrome (PC)	White	Standard box	MTS
	Black	Standard box	MTS
Satin Brass (SB)	White	Standard box	MTO
	Black	Standard box	MTS
Mocha Bronze (MB)	White	Standard box	MTS
	Black	Shelf ready box & display packaged	MTS
Painted White (PW)	White	Standard box	MTO
	Black	Standard box	MTS
Polished Brass (PB)	White	Standard box	MTO
	Black	Standard box	MTO
Light Copper (LC)	White	Standard box	MTO
	Black	Standard box	MTS

MTO = made to order
MTS = made to stock