


TITAN



TTB892MLT

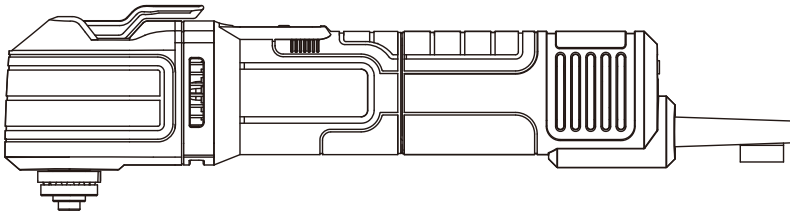

WARNING: Read the instructions before using the product!

Let's get started...

These instructions are for your safety. Please read through them thoroughly before use and retain them for future reference.



Getting **started...** 02

Safety information	03
Your product	17
Before you start	19



In more **detail...** 28

Product functions	29
Operation	30
Care and maintenance	33
Troubleshooting	36
Recycling and disposal	37
Guarantee	38
Declaration of conformity	39

Safety warnings

General power tool safety warnings



WARNING! Read all safety warnings, instructions, illustrations and specifications provided with this power tool. *Failure to follow all instructions listed below may result in electric shock, fire and/or serious injury.*

Save all warnings and instructions for future reference. *The term "power tool" in the warnings refers to your mains-operated (corded) power tool or battery-operated (cordless) power tool.*

Work area safety

- > **Keep work area clean and well lit.** *Cluttered or dark areas invite accidents.*
- > **Do not operate power tools in explosive atmospheres, such as in the presence of flammable liquids, gases or dust.** *Power tools create sparks which may ignite the dust or fumes.*
- > **Keep children and bystanders away while operating a power tool.** *Distractions can cause you to lose control.*

Electrical safety

- > **Power tool plugs must match the outlet. Never modify the plug in any way. Do not use any adapter plugs with earthed (grounded) power tools.** *Unmodified plugs and matching outlets will reduce risk of electric shock.*
- > **Avoid body contact with earthed or grounded surfaces, such as pipes, radiators, ranges and refrigerators.** *There is an increased risk of electric shock if your body is earthed or grounded.*

Safety warnings

- > **Do not expose power tools to rain or wet conditions.** *Water entering a power tool will increase the risk of electric shock.*
- > **Do not abuse the cord. Never use the cord for carrying, pulling or unplugging the power tool. Keep cord away from heat, oil, sharp edges or moving parts.** *Damaged or entangled cords increase the risk of electric shock.*
- > **When operating a power tool outdoors, use an extension cord suitable for outdoor use.** *Use of a cord suitable for outdoor use reduces the risk of electric shock.*
- > **If operating a power tool in a damp location is unavoidable, use a residual current device (RCD) protected supply.** *Use of an RCD reduces the risk of electric shock.*

Personal safety

- > **Stay alert, watch what you are doing and use common sense when operating a power tool. Do not use a power tool while you are tired or under the influence of drugs, alcohol or medication.** *A moment of inattention while operating power tools may result in serious personal injury.*
- > **Use personal protective equipment. Always wear eye protection.** *Protective equipment such as a dust mask, non-skid safety shoes, hard hat or hearing protection used for appropriate conditions will reduce personal injuries.*
- > **Prevent unintentional starting. Ensure the switch is in the off-position before connecting to power source and/or battery pack, picking up or carrying the tool.** *Carrying power tools with your finger on the switch or energising power tools that have the switch on invites accidents.*

- > **Remove any adjusting key or wrench before turning the power tool on.** *A wrench or a key left attached to a rotating part of the power tool may result in personal injury.*
- > **Do not overreach. Keep proper footing and balance at all times.** *This enables better control of the power tool in unexpected situations.*
- > **Dress properly. Do not wear loose clothing or jewellery. Keep your hair and clothing away from moving parts.** *Loose clothes, jewellery or long hair can be caught in moving parts.*
- > **If devices are provided for the connection of dust extraction and collection facilities, ensure these are connected and properly used.** *Use of dust collection can reduce dust-related hazards.*
- > **Do not let familiarity gained from frequent use of tools allow you to become complacent and ignore tool safety principles.** *A careless action can cause severe injury within a fraction of a second.*

Power tool use and care

- > **Do not force the power tool. Use the correct power tool for your application.** *The correct power tool will do the job better and safer at the rate for which it was designed.*
- > **Do not use the power tool if the switch does not turn it on and off.** *Any power tool that cannot be controlled with the switch is dangerous and must be repaired.*
- > **Disconnect the plug from the power source and/or remove the battery pack, if detachable, from the power tool before making any adjustments, changing accessories, or storing power tools.** *Such preventive safety measures reduce the risk of starting the power tool accidentally.*
- > **Store idle power tools out of the reach of children and do not allow persons unfamiliar with the power tool or these instructions to operate the power tool.** *Power tools are dangerous in the hands of untrained users.*

Safety warnings

- > **Maintain power tools and accessories.** Check for misalignment or binding of moving parts, breakage of parts and any other condition that may affect the power tool's operation. If damaged, have the power tool repaired before use. *Many accidents are caused by poorly maintained power tools.*
- > **Keep cutting tools sharp and clean.** *Properly maintained cutting tools with sharp cutting edges are less likely to bind and are easier to control.*
- > **Use the power tool, accessories and tool bits etc. in accordance with these instructions, taking into account the working conditions and the work to be performed.** *Use of the power tool for operations different from those intended could result in a hazardous situation.*
- > **Keep handles and grasping surfaces dry, clean and free from oil and grease.** *Slippery handles and grasping surfaces do not allow for safe handling and control of the tool in unexpected situations.*

Service

- > **Have your power tool serviced by a qualified repair person using only identical replacement parts.** *This will ensure that the safety of the power tool is maintained.*

Safety warnings

Safety instructions for multi tool

- > Take special care to protect yourself and people around against dusts, including the following:
 - All persons entering the work area must wear an appropriate dust mask specially designed for protection against harmful / toxic dusts, in addition to using the dust extraction facility and keeping work area well ventilated.
 - Children and pregnant women must not enter the work area.
 - Do not eat, drink or smoke in the work area.
- > Some wood and wood type products especially MDF (Medium Density Fibreboard) can produce dust that can be hazardous to your health. We recommend the use of a dust mask with replaceable filters when using this product in addition to using the dust extraction facility.
- > Hold the product correctly on its gripping surface and adopt a stable stance, make sure that the power cord is prevented from coming into contact with the product or getting caught up on other objects preventing completion of the operating pass.
- > Ensure that you have removed foreign objects such as nails and screws from the workpiece before commencing operation.
- > Do not use product for wet sanding, for dry sanding only.
- > Do not force the product. Let the product do the work at a reasonable speed. Overloading will occur if too much pressure is applied and the motor slows resulting in inefficient sanding and possible damage to the motor.
- > Do not continue to use worn, torn or heavily clogged tool attachments.

Safety warnings

- >Do not touch the moving tool attachment.
- >Do not scrape wet or dampened materials (e. g. wallpaper) or on moist surfaces. Penetration of water into the product increases the risk of an electric shock.
- >Where possible, secure smaller workpieces to prevent them from moving under the product.
- >Only use tool attachments in good condition. Do not use them if they are torn or worn.
- >Exercise extreme caution when handling the scraper. The scraper is sharp; danger of injury.
- >Keep your hands away from the cutting area. Do not reach under the material being cut.
- >Hold power tool by insulated gripping surfaces, when performing an operation where the cutting accessory may contact hidden wiring or its own cord. Cutting accessory contacting a “live” wire may make exposed metal parts of the power tool “live” and could give the operator an electric shock.
- >Clamping surfaces shall be cleaned to remove dirt, grease, oil and water.
- >Longer period using may lead overheating blade tips. Therefore take breaks of approx. 15 minutes on a regular basis to let the blade tips cool down.
- >The power tool shall not be wet or applied in wet environment.
- >The voltage of the power source must agree with the voltage specified on the nameplate of the machine.
- >Check the product, its power cord and plug as well as accessories for damage before each use. Do not use the product if it is damaged or shows wear.
- >Double check that the accessories and attachments are properly fixed. One minute testing running in no-load condition will be helpful to identify the problems.

- >Secure the workpiece. A workpiece clamped with clamping devices or in a vice is held more secure than by hand.
- >Keep the handles dry to ensure safe control. Grip the product securely with two hands so you have full control at all times.
- >Ensure that the air vents are always unobstructed and clear. Clean them if necessary with a soft brush. Blocked air vents may lead to overheating and damage the product.
- >Switch the product off immediately if you are disturbed while working by other people entering the working area. Always let the product come to complete stop before putting it down.
- >Do not overwork yourself. Take regular breaks to ensure you can concentrate on the work and have full control over the product.
- >Always keep the power cord behind the power tool.

Vibration and noise reduction

To reduce the impact of noise and vibration emission, limit the time of operation, use low-vibration and low-noise operating modes as well as wear personal protective equipment.

Take the following points into account to minimise the vibration and noise exposure risks:

- >Only use the product as intended by its design and these instructions.
- >Ensure that the product is in good condition and well maintained.
- >Use correct cutting attachments for the product and ensure they are in good condition.
- >Keep tight grip on the handles / gripping surface.
- >Maintain this product in accordance with these instructions and keep it well lubricated (where appropriate).

Safety warnings

- > Plan your work schedule to spread any high vibration tool use across a longer period of time.
- > Prolonged use of the product exposes the user to vibrations that can cause a range of conditions collectively known as hand-arm vibration syndrome (HAVS) e.g. fingers going white; as well as specific diseases such as carpal tunnel syndrome. To reduce this risk when using the product, always wear protective gloves and keep your hands warm.

Emergency

Familiarise yourself with the use of this product by means of this instruction manual. Memorise the safety directions and follow them to the letter. This will help to prevent risks and hazards.

- > **Always be alert when using this product, so that you can recognise and handle risks early.** Fast intervention can prevent serious injury and damage to property.
- > **Switch off and disconnect from the power supply if there are malfunctions.** Have the product checked by a qualified professional and repaired, if necessary, before you operate it again.

Residual risks

Even if you are operating this product in accordance with all the safety requirements, potential risks of injury and damage remain. The following dangers can arise in connection with the structure and design of this product:

- > Health defects resulting from vibration emission if the product is being used over long periods of time or not adequately managed and properly maintained.

- >Injuries and damage to property due to broken cutting attachments or the sudden impact of hidden objects during use.
- >Danger of injury and property damage caused by flying objects.



WARNING! This product produces an electromagnetic field during operation! This field may under some circumstances interfere with active or passive medical implants! To reduce the risk of serious or fatal injury, we recommend persons with medical implants to consult their doctor and the medical implant manufacturer before operating this product!

The following information applies to professional users only but is good practice for all users:

Additional safety warnings for construction dust

The updated Control of Substances Hazardous to Health Regulations 1st October 2012 now also targets to reduce the risks associated with silica, wood and gypsum dusts. Construction workers are one of the at-risk groups within this because of the dust that they breathe: silica dust is not just a nuisance; it is a real risk to your lungs!

Silica is a natural mineral present in large amounts in things like sand, sandstone and granite. It is also commonly found in many construction materials such as concrete and mortar. The silica is broken into very fine dust (also known as Respirable Crystalline Silica or RCS) during many common tasks such as cutting, drilling and grinding. Breathing in very fine particles of crystalline silica can lead to the development of:

Safety warnings

- Lung cancer
- Silicosis
- Chronic Obstructive Pulmonary Disorder (Chronic obstructive pulmonary disease (COPD))

And breathing in fine particles of wood dust can lead to the development of Asthma. The risk of lung disease is linked to people who regularly breathe construction dust over a period of time, not on the odd occasion.

To protect the lung, the COSHH Regulations sets a limit on the amount of these dusts that you can breathe (called a Workplace Exposure Limit or WEL) when averaged over a normal working day. These limits are not a large amount of dust: when compared to a penny it is tiny – like a small pinch of salt:

This limit is the legal maximum; the most you can breathe after the right controls have been used.

How to reduce the amount of dust?

1. Reduce the amount of cutting by using the best sizes of building products.
2. Use a less powerful tool e.g. a block cutter instead of angle grinder.
3. Using a different method of work altogether – e.g. using a nail gun to direct fasten cable trays instead of drilling holes first.

Please always work with approved safety equipment, such as those dust masks that specially designed to filter out microscopic particles and use the dust extraction facility at all time.

For more information, please see the HSE website:

<http://www.hse.gov.uk/construction> or <http://www.hse.gov.uk/pubns/cis69.pdf>



WARNING! Some dust created by power sanding, sawing, grinding, drilling and other construction activities contains chemicals known to cause cancer, birth defects or other reproductive harm. Some examples of these chemicals are:

- Lead from lead-based paint
- Crystalline silica from bricks and cement and other masonry products
- Arsenic and chromium from chemically treated timber

Your risk from these exposures varies, depending upon how often you do this type of work. To reduce your exposure to these chemicals:

- Work in a well-ventilated area.
- Work with approved protective equipment, such as those dust masks that are specially designed to filter microscopic particles.

Getting started...

Vibration

The European Physical Agents (Vibration) Directive has been brought in to help reduce hand arm vibration syndrome injuries to power tool users. The directive requires power tool manufacturers and suppliers to provide indicative vibration test results to enable users to make informed decisions as to the period of time a power tool can be used safely on a daily basis and the choice of tool.

SEE TECHNICAL SPECIFICATIONS IN THE INSTRUCTION MANUAL FOR THE VIBRATION LEVELS OF YOUR TOOL.

The declared vibration emission value should be used as a minimum level and should be used with the current guidance on vibration.

Safety warnings

Calculating the actual period of use can be difficult and the HSE website has further information.

The declared vibration total value has been measured in accordance with EN 62841-1 and EN 62841-2-4 and may be used for compare one tool with another.

The declared vibration total value may also be used in a preliminary assessment of exposure.



WARNING! the vibration and noise emissions during actual use of the power tool can differ from the declared value depending on the ways in which the tool is used dependant on the following examples and other variations on how the tool is used:

- How the tool is used and the materials being cut or drilled.
- The tool being in good condition and well maintained.
- The use of the correct accessory for the tool and ensuring it is sharp and in good condition.
- The tightness of the grip on the handles.
- And the tool is being used as intended by its design and these instructions.

While working with this power tool, hand/arm vibrations occur. Adopt the correct working practices in order to reduce the exposure to vibration. This tool may cause hand-arm vibration syndrome if its use is not adequately managed.



WARNING! Identify safety measures to protect the operator that are based on an estimation of exposure in the actual conditions of use (taking account of all parts of the operating cycle such as the times when the tool is switched off and when it is running idle in addition to the trigger time).

Note:

- The use of other tools will reduce the users' total working period on this tool.
- Helping to minimise your vibration exposure risk. ALWAYS use sharp chisels, drills and blades.
- Maintain this tool in accordance with these instructions and keep well lubricated (where appropriate).
- Avoid using tools in temperatures of 10°C or less. Plan your work schedule to spread any high vibration tool use across a number of days.

Health surveillance



All employees should be part of an employer's health surveillance scheme to help identify any vibration related diseases at an early stage, prevent disease progression and help employees stay in work.

Symbols


On the product, the rating label and within these instructions you will find among others the following symbols and abbreviations. Familiarise yourself with them to reduce hazards like personal injuries and damage to property.

V~	Volt (alternating voltage)	kg	Kilogram
Hz	Hertz	°C	Degree Celsius
W	Watt	dB(A)	Decibel (A-rated)
/min or min ⁻¹	Per minute	m/s ²	Metres per second squared
mm	Millimetre		
	Lock / to tighten or secure.		Unlock / to loosen.
	Note / Remark.		Caution / Warning.
	Read the instruction manual.		Wear hearing protection.
	Wear eye protection.		Wear a dust mask.
	Wear protective gloves (for assembly, adjustments and maintenance).		Wear protective, slip- resistant footwear.
yyWxx	Manufacturing date code; year of manufacturing (20yy) and week of manufacturing (Wxx)		
	For use in dry indoor rooms only.		
	Switch the product off and disconnect it from the power supply before assembly, cleaning, adjustments, maintenance, storage and transportation.		
	This product is of protection class II. That means it is equipped with enhanced or double insulation.		
	The product complies with the applicable European directives and an evaluation method of conformity for these directives was done.		
	UK Conformity Assessed.		
	WEEE symbol. Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or local store for recycling advice.		


Your product

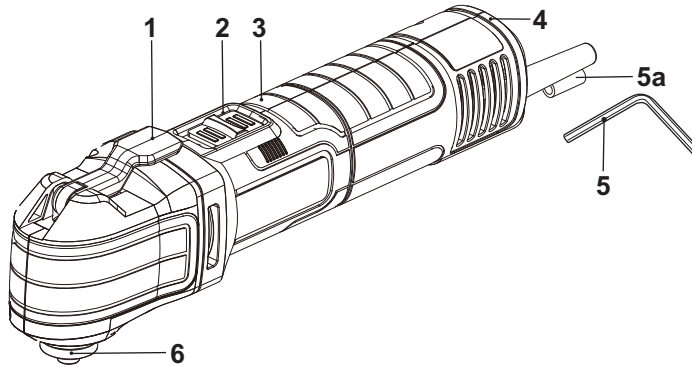


7



8




9



10



11




12



13



13a



14

- | | |
|------------------------------|--|
| 1. SDS clamping lever | 9. Segment saw blade |
| 2. On/Off switch | 10. Plunge saw blade for metal |
| 3. Hand grip | 11. Sanding paper
(60# x3, 120# x3, 240# x3) |
| 4. Speed dial* | 12. Scraper |
| 5. Hex key | 13. Bolt |
| a. Hex key holder | a. Locking flange |
| 6. SDS tool holder | 14. Tool holder adaptor
(for popular brand accessories) |
| a. Pin* (x12) | a. Pin* (x12) |
| 7. Sanding base plate | |
| 8. Plunge saw blade for wood | |



NOTE: Parts marked with * are not shown in this overview. Please refer to the respective section in the instruction manual.

Getting started...

Technical specifications

General

- > **Rated voltage, frequency** : 220 - 240 V~, 50 Hz
- > **Rated power input** : 300 W
- > **Rated no load speed n_0** : 10000 - 19000 min⁻¹
- > **Oscillation angle** : 2.8°
- > **Protection class** : II □
- > **Weight** : approx. 1.65 kg

Sanding base plate/paper

- > **Sanding paper fixing** : Hook & loop
- > **Base plate dimension** : Delta 80 mm

Sound values

- > **Sound pressure level L_{pA}** : 82.8 dB(A)
- > **Sound power level L_{WA}** : 93.8 dB(A)
- > **Uncertainty K_{pA} , K_{WA}** : 3 dB(A)

Hand arm vibration values

- > **Hand arm vibration a_h** : 2.633 m/s²
- > **Uncertainty K** : 1.5 m/s²

The sound values have been determined according to noise test code given in EN 62841-1 and EN 62841-2-4.

The sound intensity level for the operator may exceed 80 dB(A) and ear protection measures are necessary.

The declared vibration total values and the declared noise emission values have been measured in accordance with a standardised test method (according to in EN 62841-1 and EN 62841-2-4) and may be used to compare one tool with another tool. The declared vibration emission value and noise emission value may also be used in a preliminary assessment of exposure.



WARNING! The vibration and noise emissions during actual use of the power tool can differ from the declared values depending on the ways in which the tool is used especially what kind of workpiece is processed; and need to identify safety measures to protect the operator that are based on an estimation of exposure in the actual conditions of use (taking account of all parts of the operating cycle such as the times when the tool is switched off and when it is running idle in addition to the trigger time).

RATING LABEL EXPLANATION

TTB892MLT = Model number

TT = TITAN B = 220-240V ~ 892 = Serial Number MLT = Multi Tool

Unpacking

- > Unpack all parts and lay them on a flat, stable surface.
- > Remove all packing materials and shipping devices, if applicable.
- > Make sure the delivery contents are complete and free of any damage. If you find that parts are missing or show damage do not use the product but contact your dealer. Using an incomplete or damaged product represents a hazard to people and property.
- > Ensure that you have all the accessories and tools needed for assembly and operation. This also includes suitable personal protective equipment.



WARNING! The product and the packaging are not children's toys! Children must not play with plastic bags, sheets and small parts! There is a danger of choking and suffocation!

You will need

(items not supplied)

Suitable personal protective equipment

(items supplied)

Hex key (5)
 Sanding base plate (7)
 Plunge saw blade for wood (8)
 Segment saw blade (9)
 Plunge saw blade for metal (10)
 Sanding paper (11) (60# x3, 120# x3, 240# x3)
 Scraper (12)
 Bolt for compatible accessories (13)
 Locking flange for compatible accessories (13a)
 Tool holder adaptor(14)

Setup



WARNING! The product must be fully assembled before operation! Do not use a product that is only partly assembled or assembled with damaged parts!



Follow the assembly instructions step-by-step and use the pictures provided as a visual guide to easily assemble the product!
 Do not connect the product to power supply before it is completely assembled!

Setup



NOTE: Take care of small parts that are removed during assembly or when making adjustments. Keep them secure to avoid lost.

Tool attachments

Different tool attachments can be used with this product depending on the material being worked. Select a suitable tool attachment according to the intended use, by referring to the following table.



WARNING! Always use tool attachments according to the intended use!



Observe the technical requirements of this product (see section “Technical specifications”) when purchasing and using tool attachments! Some tool attachments are very sharp and become hot during use! Handle them carefully! Wear protective gloves when handling tool attachments in order to avoid injuries like burns and cuts!







WARNING! Ensure the tool attachments are correctly attached. Incorrect or insecurely fastened tool attachments can come loose during operation and cause a hazard.



NOTE: Tool attachments are available in various shapes and sizes. Below is only an overview of the supplied tool attachments. Ask in store for more choices.

Tool attachment	Material	Application
Sanding base plate (7) & sanding paper (11)	Bare or painted wood, plaster, and other surface, depending on grain size (grit) of sanding paper	Flat sanding and reaching into corners and along edges

Tool attachment		Material	Application
Plunge saw blade for wood (8)		Wood, plastic, drywall	Separating or flush/plunge saw cutting, also for sawing close to edges, in corners and hard to reach areas
Segment saw blade (9)		Wood	
Plunge saw blade for metal (10)		non-ferrous metals	Cutting sheet metal or copper tube
Scraper (12)		Paint & varnish, bonded carpet, soft adhesives, vinyl flooring, wood and other floor coverings	Scraping on hard surfaces, e. g. scraping of carpet or wallpaper



This product can also be used with attachments of other brands. Carefully read the safety warnings and observe the technical specification of the respective attachment before use and purchase.



The provided tool holder adaptor (14) and related fixing parts (13, 13a) enable the product to work with compatible accessories which cannot be attached to the quick changing tool holder (6) of this product.

This product can also be used with attachments of other brands. Carefully read the safety warnings and observe the technical specification of the respective attachment before use and purchase.

Getting started...

Sanding base plate/paper

Sanding paper is available with different grain sizes (grit) and for different material. The grain size is indicated with a number on the reverse of the sanding paper, the higher the number the finer is the grain size.

Grain size	Class	Application
< 80	Coarse	Removal of paint and varnish, preparation of rough surfaces.
80-120	Medium	For face sanding and planning small irregularities.
>180	Fine	Finishing, cleaning plaster and water stain from wood.

- > Only use suitable sanding papers in terms of application and size. Do not use papers that are bigger than the base plate of the product.
- > Replace worn or damaged sanding papers immediately.
- > Start with a coarse sanding paper and finish with a fine-grained one to achieve a satisfactory result.
- > Do not use the same sanding paper on different materials, e. g. do not use sanding paper that has been used for sanding metal to sand wood. Small metal particles remaining in the sanding paper will lead to scratches.

Attaching

- > Open the SDS tool holder (6) by opening the SDS clamping lever (1) fully (Fig. 1, step 1).
- > Slide sanding base plate (7) onto the SDS tool holder (6) and ensure the grooves on the back of sanding base plate (7) fit with the pins on the upper/ fixed part of the SDS tool holder (6) (Fig. 1, step 2).
- > Fix the sanding base plate (7) by closing the SDS clamping lever (1) fully (Fig. 1, step 3).
- > Check if the sanding base plate (7) is reliably clamped and make adjustment if necessary.
- > With the hook-and-loop system, sanding papers are simply pressed on the base plate. Align and attach the required sanding paper (11) to the base plate (7) and slightly press the sanding paper (11) to fix it (Fig. 1, step 4).

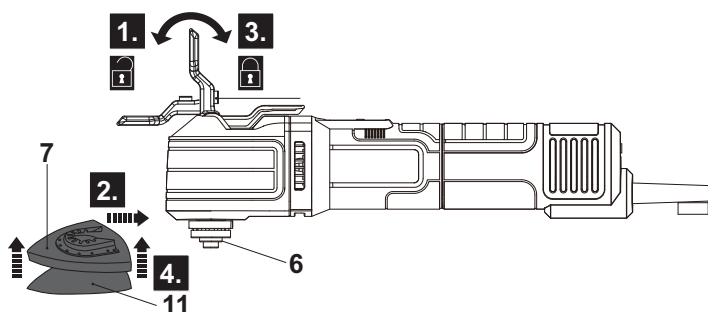


Fig. 1

Removing/Replacing (sanding paper)

With the hook-and-loop system, sanding papers are simply removed by pulling off.

- > Grip one corner of the sanding paper (11) and pull it off the base plate (7) (Fig. 2).
- > Attach a new sanding paper as required.

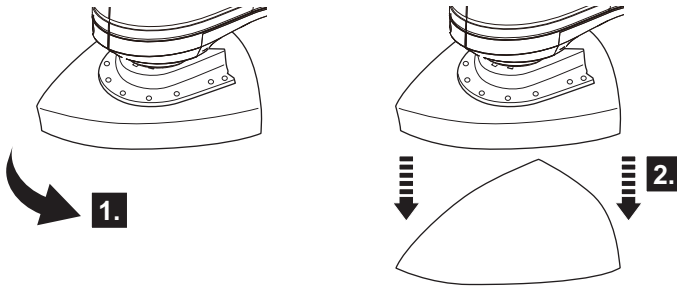


Fig. 2



NOTE: Always remove dust and chips from the sanding base plate (7) before attaching sanding paper (11) to reduce the wear of sanding base plate and sanding paper.

If one corner and/or edge of the sanding paper (11) is worn, it can be re-attached by turning 120° to use the next corner and/or edge.

Adjusting (sanding base plate)



NOTE: Adjust the sanding base plate (7) at the desired angle according to the intended use. The tool holder (6) and sanding base plate are configured, so that the sanding base plate can be attached at 30° intervals around the tool holder, from 0° to 360°.

If one corner and/or edge is worn, the sanding base plate (7) can be turned to use the next corner and/or edge.

- > Open the SDS tool holder (6) by opening the SDS clamping lever (1) fully (Fig. 3, step 1).
- > Disengage and adjust the sanding base plate (7) to the desired position (Fig. 3, step 2). Make sure the pins of SDS tool holder (6) fit properly in the grooves on the back of the sanding base plate (7).
- > Fix the sanding base plate (7) by closing the SDS clamping lever (1) fully (Fig. 3, step 3).
- > Check if the sanding base plate (7) is reliably clamped and make adjustment if necessary.

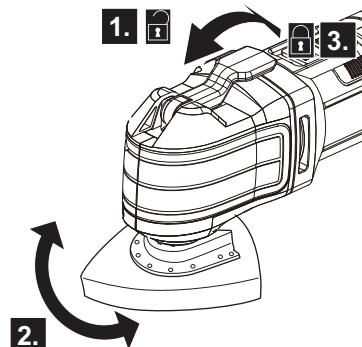


Fig. 3

Sanding base plate/paper

Removing/Replacing (Sanding base plate)

- > The sanding base plate can be removed following the reverse actions as instructed for “attaching”.
- > Check for damage and wear, clean the tool holder from dust and attach a new one if necessary.

Plunge/segment saw blade, Scraper

Attaching

- > Open the SDS tool holder (6) by opening the SDS clamping lever (1) fully (Fig. 1 , step 1).
- > Slide desired tool attachment (8, 9, 10 or 12) onto the SDS tool holder (6) and ensure the grooves on the back of tool attachment fit with the pins on the upper/ fixed part of the SDS tool holder (6) (Fig. 1, step 1; Fig. 4, 5, 6).
- > Fix the tool attachment (8, 9, 10 or 12) by closing the SDS clamping lever (1) fully (Fig. 1, step 3).
- > Check if the tool attachment (8, 9, 10 or 12) is reliably clamped and make adjustment if necessary.




Fig. 4




Fig. 5




Fig. 6

Adjusting



WARNING! Only adjust the scraper (12) and plunge saw blade (8 or 10) at the angle within range of -90° - $+90^{\circ}$. Never adjust the scraper and plunge saw blade pointing backward (Fig. 7, 8). Never adjust the segment saw blade (9) at any angles other than 0° (Fig. 9).



NOTE: Adjust the scraper (12) and plunge saw blade (8/10) at the desired angle according to the intended use. The tool holder (6) and scraper/plunge saw blade are configured, so that they can be attached at 30° intervals around the tool holder, from -90° to +90°.




Fig. 7

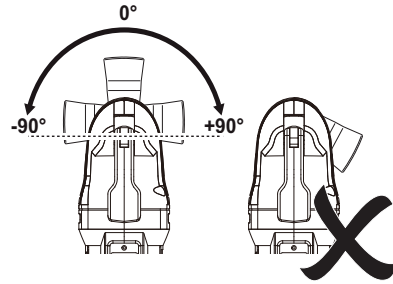



Fig. 8






Fig. 9

> Follow the same procedure for “adjusting of sanding base plate”.

Removing/Replacing



NOTE: Replace the tool attachment if it is worn or shows damage. Never use a tool attachment which is damaged or worn in order to avoid hazards and resulting injuries and damages.

- > The tool attachment can be removed following the reverse actions as instructed for “attaching”.
- > Check for damages and wear, clean the tool holder from dust and attach a new one if necessary.

Getting started...

Tool holder adaptor

The provided tool holder adaptor (14) and the related fixing part and related fixing parts (13, 13a) enable the product to work with popular brand accessories which cannot be attached to the quick changing tool holder (6) of this product.



WARNING! Check with the dealer of the tool attachments to make sure if their tool attachments are compatible with the provided tool holder adaptor (14).

Pay special attention to check the reliability of the assembled compatible tool attachment before working with it.

- > Ensure that the SDS clamping lever (1) is closed and place the product upside down on a flat, stable surface.
- > Place the tool holder adaptor (14) onto SDS tool holder (6) and ensure they are engaged (Fig. 10).

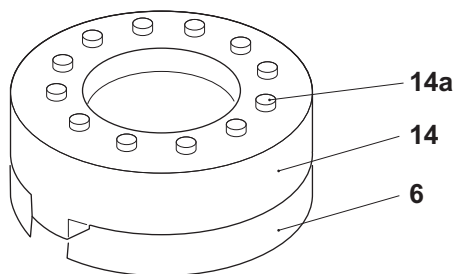


Fig. 10

- > Align the grooves of the compatible tool attachment with the pins of the tool holder adaptor (14a) and place the tool attachment onto the tool holder adaptor (14) (Fig. 11).
- > Secure the tool attachment with locking flange (13a) and bolt (13) (Fig. 12).

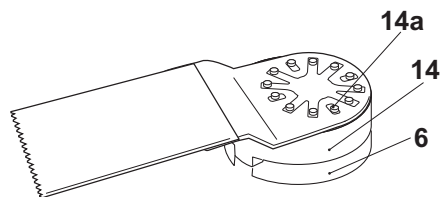


Fig. 11

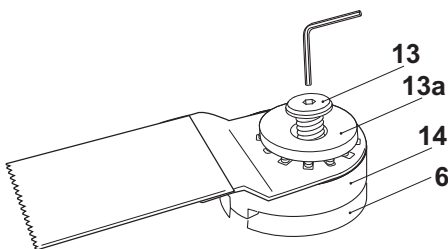


Fig. 12

- > Check if the tool attachment is reliably clamped between the locking flange (13a) and tool holder adaptor (14). Make adjustment if necessary.

Connection to the power supply

- > Make sure the on/off switch (2) is in off position (Fig. 13).

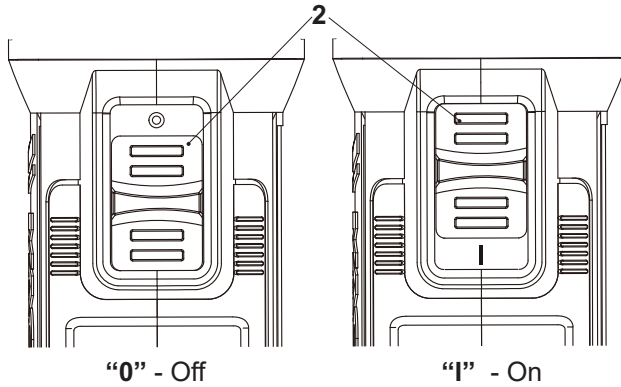


Fig. 13

- > Connect the plug with a suitable socket.



WARNING! Check the voltage! The voltage must comply with the information on the rating label!


- > Your product is now ready to be used.

Getting started...

In more detail...



Product functions	29
Operation	30
Care and maintenance	33
Troubleshooting	36
Recycling and disposal	37
Guarantee	38
Declaration of conformity	39



Intended use

This product is intended for cutting and sawing on wood, gypsum, plasterboard, soft plastics and non-ferrous metals, especially for flush and plunge cutting. It can also be used for dry sanding and scraping of small surfaces, e. g. edges etc. The supplied segment saw blade is only suitable for cutting wood and must not be used on other materials.

For safety reasons it is essential to read the entire instruction manual before first operation and to observe all the instructions therein.

Speed dial



WARNING! Always switch the product off and disconnect it from power supply before making any adjustments!



Limit the maximum speed using the speed dial (4) according to the application (Fig. 14).

- > Turn the speed dial (4) right to increase the maximum speed.
- > Turn the speed dial (4) left to decrease the maximum speed.

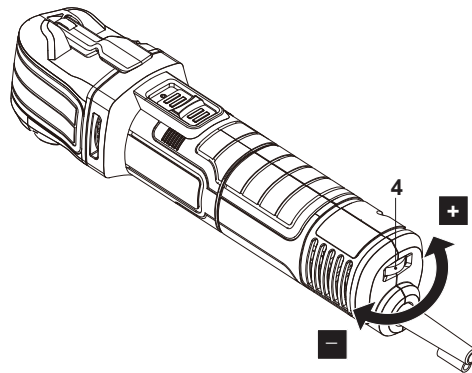


Fig. 14

Switching on/off

- > Slide the on/off switch (2) forward (as seen from the operator's position) to switch the product on (Fig. 13).
- > Slide the on/off switch (2) backward (as seen from the operator's position) to switch the product off (Fig. 13).

General operation

- > Check the product, its power cord and plug as well as accessories for damage before each use. Do not use the product if it is damaged or shows wear.
- > Double check that the accessories and attachments are properly fixed.
- > Always hold the product on its gripping surface. Keep the gripping surface dry to ensure safe support.
- > Ensure that the air vents are always unobstructed and clear. Clean them if necessary with a soft brush. Blocked air vents may lead to overheating and damage the product.
- > Switch the product off immediately if you are disturbed while working by other people entering the working area. Always let the product come to complete stop before putting it down.
- > Do not overwork yourself. Take regular breaks to ensure you can concentrate on the work and have full control over the product.
- > Always be aware of kickback, ensure stable footing.
- > Ensure the workpiece is free of obstacles like nails or screws before operation. Remove them if required. Where possible, secure smaller workpieces to prevent them from moving under the product.
- > Secure the workpiece properly, e. g. with a clamping device or a vice.
- > Always hold the product firmly by its hand grip (3) during operation. Do not cover the air vents (Fig. 15).

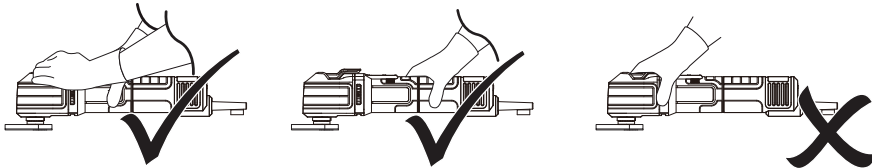


Fig. 15

Sanding



WARNING! During operation fine dust will be generated!



Some dusts are highly inflammable and explosive! Do not smoke during operation, keep heat sources and open flames out of the working area!



Always use wear a dust mask to protect yourself against hazards resulting from fine dust!



- > Switch the product on before placing it on the workpiece.
- > Move the product back and forth with slow even speed.
- > Only apply as much pressure as necessary to keep the product flat on the workpiece. Higher pressure will not increase but lower the performance of the product and leads to uneven results.
- > Keep the product moving at all times, do not stop in one position to avoid grooves.
- > Lift the product from the workpiece before switching it off.

Scraping



WARNING! Switch the product off, let it come to a complete stop and disconnect it from the power supply if the attachment gets stuck in the workpiece. Only then free the jammed attachment.

- > Switch the product on before placing the scraper (12) on the workpiece.
- > Adjust the product to a proper scraping angle according to the material of workpiece.
- > Keep the product at a flatter angle to the workpiece when processing soft materials, such as wood. Otherwise the scraper can cut into the workpiece.
- > Move the product forward at an even speed (Fig. 16).
- > Only apply as much pressure as necessary. Higher pressure will not increase but lower the performance of the product and leads to uneven results.
- > Lift the product from the workpiece before switching it off.

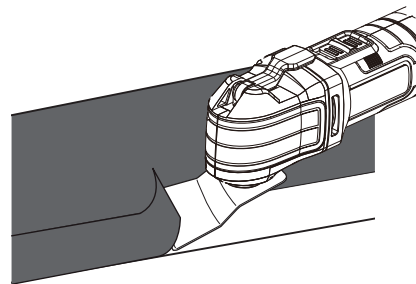


Fig. 16

Cutting



WARNING! Only perform plunge cutting into soft materials such as plasterboard or wood! Never attempt to conduct any plunge cutting into hard materials such as metal! Use only the appropriate saw blade for cutting! If you are unsure when cutting, consult with an experienced person – risk of injury!

Cutting



Warning! Use the supplied saw blades only for cutting of wood, never for any other materials!



WARNING! During operation fine dust will be generated!

Some dusts are highly inflammable and explosive! Do not smoke during operation, keep heat sources and open flames out of the working area! Always wear a dust mask to protect yourself against hazards resulting from fine dust!



NOTE: Do not turn the switch on or off while the product is in contact with the workpiece. It will decrease switch life and could cause damage to the workpiece.



NOTE: When cutting metal, use the suitable plunge saw blade and special cutting oil for cooling and adapt the moving speed to the cutting.

- > Mark the cutting line and clamp the workpiece on a flat surface to ensure it will not move during operation.
- > Align the saw blade with the marking. Make sure that the saw blade does not yet touch the surface.
- > Switch the product on before placing the saw blade on the workpiece.
- > Apply light pressure and carefully guide the saw blade into the workpiece until the desired depth is reached.
- > Only apply as much pressure as necessary. Higher pressure will not increase but lower the performance of the product and leads to uneven results.
- > When using the plunge saw blade (8/10), lift the saw blade/product from the workpiece and repeat the cutting steps as mentioned above (Fig. 17).
- > When using the segment saw blade (9), apply light pressure in the cutting direction and move the product forward along the cutting line at an even speed (Fig. 18).
- > Keep the product moving at all times, do not stop in one position to avoid grooves.
- > Lift the product from the workpiece before switching it off.

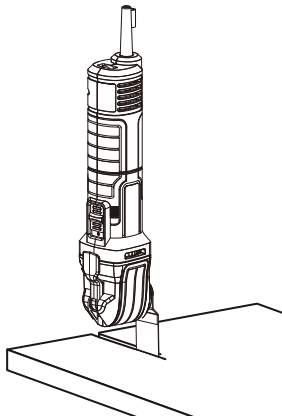


Fig. 17

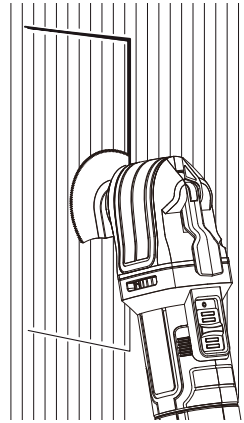


Fig. 18



WARNING! Switch the product off, let it come to a complete stop and disconnect it from the power supply if the attachment gets stuck in the workpiece. Only then free the jammed attachment.



After use

- > Switch the product off, disconnect it from the power supply and let it cool down.
- > Check, clean and store the product as described below.

The golden rules for care



WARNING! Always switch the product off, disconnect it from the power supply and let the product cool down before performing inspection, maintenance and cleaning work!



- > Keep the product clean. Remove debris from it after each use and before storage.
- > Regular and proper cleaning will help ensure safe use and prolong the life of the product.
- > Inspect the product before each use for worn and damaged parts. Do not operate it if you find broken and worn parts.

The golden rules for care



WARNING! Only perform repairs and maintenance work according to these instructions! All further works must be performed by a qualified specialist!

General cleaning

- > Clean the product with a dry cloth. Use a brush for areas that are hard to reach.
- > In particular clean the air vents (3a) after every use with a cloth and brush.
- > Remove stubborn dirt with compressed air (max. 3 bar).



NOTE: Do not use chemical, alkaline, abrasive or other aggressive detergents or disinfectants to clean this product as they might be harmful to its surfaces.

- > Check for any damage and wear. Repair damages in accordance with this instruction manual or take it to an authorised service centre before using the product again.

Maintenance

Before and after each use, check the product and accessories (or attachments) for wear and damage. If required, exchange them for new ones as described in this instruction manual. Observe the technical requirements.

Power cord

If the supply cord of this power tool is damaged, it must be replaced by a specially prepared supply cord available through the service organization.


UK plug (for UK only)

If you need to replace the fitted plug, then follow the instructions below.
IMPORTANT: The wires in the mains lead are coloured in accordance with the following code:

Blue – Neutral

Brown – Live

As the colours of the wire in the mains lead of this product may not correspond with the coloured marking identifying the terminals in your plug, proceed as follows. The wire, which is coloured blue, must be connected to the terminal, which is marked with N or coloured black. The wire, which is coloured brown, must be connected to the terminal, which is marked L or coloured red.

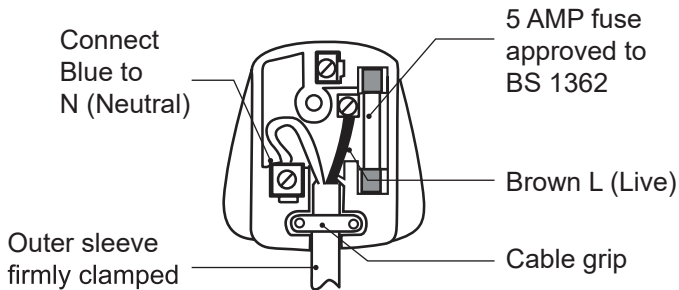

WARNING! Never connect live or neutral wires to the earth terminal of the plug, which is marked with E.

Only fit an approved BS 1363 or BS 1363/A plug and correctly rated BS 1362 5 Amp fuse. If in doubt, consult a qualified electrician.



NOTE: If a moulded plug is fitted and has to be removed take great care in disposing of the plug and severed cable, it must be destroyed to prevent engaging into a socket.

Repair

This product does not contain any parts that can be repaired by the consumer. Contact an authorised service centre or a similarly qualified person to have it checked and repaired.

Storage

- > Switch the product off and disconnect it from the power supply.
- > Remove the tool attachment.
- > Clean the product as described above.
- > Store the product and its accessories in a dark, dry, frost-free, well-ventilated place.

Storage

- > Always store the product in a place that is inaccessible to children. The ideal storage temperature is between 10 °C and 30 °C.
- > We recommend using the original package for storage or covering the product with a suitable cloth or enclosure to protect it against dust.

Transportation

- > Switch the product off and disconnect it from the power supply.
- > Remove the tool attachment.
- > Always carry the product by its handle.
- > Protect the product from any heavy impact or strong vibrations which may occur during transportation in vehicles.
- > Secure the product to prevent it from slipping or falling over.

Troubleshooting

Suspected malfunctions are often due to causes that the users can fix themselves. Therefore check the product using this section. In most cases the problem can be solved quickly.



WARNING! Only perform the steps described within these instructions! All further inspection, maintenance and repair work must be performed by an authorised service centre or a similarly qualified specialist if you cannot solve the problem yourself!

Problem	Possible Cause	Solution
1. Product does not start	1.1. Not connected to power supply 1.2. Power cord or plug is defective 1.3. Other electrical defect to the product	1.1. Connect to power supply 1.2. Check by a specialist electrician 1.3. Check by a specialist electrician

Problem	Possible Cause	Solution
2. Product does not reach full power	2.1. Extension cord not suitable for operation with this product 2.2. Power source (e. g. generator) has too low voltage 2.3. Air vents are blocked	2.1. Use a proper extension cord 2.2. Connect to another power source 2.3. Clean the air vents
3. Unsatisfactory result	3.1. Attachment is dull/damaged 3.2. Attachment not suitable for work piece material	3.1. Replace with new one 3.2. Use proper attachment
4. Excessive vibration or noise	4.1. Attachment is dull/damaged 4.2. Bolt/locking flange are loose 4.3. Attachment not properly attached or correctly assembled	4.1. Replace with a new one 4.2. Tighten bolt/locking flange 4.3. Reattach/re-assemble attachment

Recycling and disposal



Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or local store for recycling advice.

In more detail...

Guarantee

We take special care to select high quality materials and use manufacturing techniques that allow us to create products incorporating design and durability. This product (TITAN Multi Tool) has a manufacturer's guarantee of 2 years against manufacturing defects, from the date of purchase (if bought in store) or date of delivery (if bought online), at no additional cost.

To make a claim under this guarantee, you must present your proof of purchase (such as a sales receipt, purchase invoice or other evidence admissible under applicable law), please keep your proof of purchase in a safe place. For this guarantee to apply, the product you purchased must be new, it will not apply to second hand or display products. Unless stated otherwise by applicable law, any replacement product issued under this guarantee will only be guaranteed until expiry of the original guarantee period.

This guarantee covers product failures and malfunctions provided the product was used for the purpose for which it is intended and subject to installation, cleaning, care and maintenance in accordance with the information contained in these terms and conditions, in the user manual and standard practice, provided that standard practice does not conflict with the user manual.

This guarantee does not cover defects and damage caused by normal wear and tear or damage that could be the result of improper use, faulty installation or assembly, neglect, accident, misuse, or modification of the product. Unless stated otherwise by applicable law, this guarantee will not cover, in any case, ancillary costs (shipping, movement, costs of uninstalling and reinstalling, labour etc), or direct and indirect damage.



This guarantee does not cover defects and damage caused by or resulting from:

- Normal wear and tear
- Overload, misuse or neglect
- Repairs attempted by anyone other than an authorised agent
- Cosmetic damage
- Damage caused by foreign objects, substances or accidents
- Accidental damage or modification
- Failure to follow manufacturer's guidelines
- Loss of use of the goods

If the product is defective, we will, within a reasonable time, repair or replace it.

Rights under this guarantee are enforceable in the country in which you purchased this product. Guarantee related queries should be addressed to the store you purchased this product from.

The guarantee is in addition to and does not affect your statutory rights.

 (UK) DECLARATION OF CONFORMITY		
Product		
<ul style="list-style-type: none"> • Multi Tool • TTB892MLT • Serial number: from 000001 to 999999 		
Name and address of the manufacturer or his authorised representative:		
Kingfisher International Products Limited 3 Sheldon Square London W2 6PX United Kingdom		
This declaration of conformity is issued under the sole responsibility of the manufacturer.		
Object of the declaration		
Product	Model	EAN
Multi Tool	TTB892MLT	5059340253312
The object of the declaration described above is in conformity with the relevant legislation:		
Supply of Machinery (Safety) Regulations 2008 as amended Electromagnetic Compatibility Regulations 2016 as amended The Restriction of the use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 as amended		
References to the relevant designated standards used or references to the other technical specifications in relation to which conformity is declared:		
EN 62841-1:2015 EN 62841-2-4:2014 EN ISO 12100:2010 EN IEC 55014-1:2021 EN IEC 55014-2:2021 EN IEC 61000-3-2:2019/A1:2021 EN 61000-3-3:2013/A1:2019		
Authorised signatory and technical file holder: Kingfisher International Products Limited 3 Sheldon Square London W2 6PX United Kingdom		
		
David Awe Group Quality Director		On: 28/02/2022

In more detail...



(EN) EU DECLARATION OF CONFORMITY
 (FR) DÉCLARATION UE DE CONFORMITÉ
 (ES) DECLARACIÓN UE DE CONFORMIDAD
 (PT) DECLARAÇÃO DE CONFORMIDADE UE

Product/ Produit/ Producto/Produto

- Multi Tool/Outil multifunction/Multiherramienta/Multiferramenta
- TTB892MLT
- SN: 000001-999999

Name and address of the manufacturer or his authorised representative:
 Nom et adresse du fabricant ou de son mandataire:
 Nombre y dirección del fabricante o de su representante autorizado:
 Nome e endereço do fabricante ou do respetivo mandatário:

Kingfisher International Products B.V.,
 Rapenburgerstraat 175E,
 1011 VM Amsterdam,
 The Netherlands

This declaration of conformity is issued under the sole responsibility of the manufacturer.
 La présente déclaration de conformité est établie sous la seule responsabilité du fabricant.
 La presente declaración de conformidad se expide bajo la exclusiva responsabilidad del fabricante.
 A presente declaração de conformidade é emitida sob a exclusiva responsabilidade do fabricante.

Object of the declaration/Objet de la declaration/Objeto de la declaración/Objeto da declaração

Product/Produit/Producto/ Produto

Model/Modèle/Modelo/Modelo

EAN

Multi Tool
 Outil multifunction
 Multiherramienta
 Multiferramenta

TTB892MLT

5059340253312 (UK)
 5059340253329 (EU)

The object of the declaration described above is in conformity with the relevant Union harmonisation legislation:
 L'objet de la déclaration décrit ci-dessus est conforme à la législation d'harmonisation de l'Union applicable:
 El objeto de la declaración descrita anteriormente es conforme con la legislación de armonización pertinente de la Unión:
 O objeto da declaração acima descrito está em conformidade com a legislação de harmonização da União aplicável:



2006/42/EC as amended Machinery Directive
 2014/30/EU as amended Directive Electromagnetic compatibility
 2011/65/EU as amended Directive Restriction of the use of certain hazardous substances in electrical and electronic equipment

Directive 2006/42/CE relative aux machines
 2014/30 / UE telle que modifiée Directive Compatibilité électromagnétique
 Directive 2011/65/UE relative à la limitation de l'utilisation de certaines substances dangereuses dans les équipements électriques et électroniques

Directiva sobre maquinaria modificada 2006/42/CE
 2014/30/UE modificada Directiva Compatibilidad electromagnética
 2011/65/UE modificada Directiva Restricción del uso de determinadas sustancias peligrosas en equipos eléctricos y electrónicos

2006/42/CE como diretiva de máquinas alteradas
 2014/30/UE como alteração da compatibilidade eletromagnética
 2011/65/UE como restrição diretiva alterada da utilização de certas substâncias perigosas em equipamentos elétricos e eletrônicos

References to the relevant harmonised standards used or references to the other technical specifications in relation to which conformity is declared:

Références des normes harmonisées pertinentes appliquées, y compris la date de celles-ci, ou des autres spécifications techniques, y compris la date de celles-ci, par rapport auxquelles la conformité est déclarée:
 Referencias a las normas armonizadas pertinentes utilizadas, incluidas las fechas de las normas, o referencias a las otras especificaciones técnicas, incluidas las fechas de las especificaciones, respecto a las cuales se declara la conformidad:

Referências às normas harmonizadas aplicáveis utilizadas, incluindo a data da norma, ou às outras especificações técnicas, incluindo a data da especificação, em relação às quais é declarada a conformidade:

EN 62841-1:2015
 EN 62841-2-4:2014
 EN ISO 12100:2010
 EN IEC 55014-1:2021
 EN IEC 55014-2:2021
 EN IEC 61000-3-2:2019/A1:2021
 EN 61000-3-3:2013/A1:2019

Authorised signatory and technical file holder/signataire et responsable de la documentation technique
 autorisé/firmante autorizado y titular del expediente técnico/ signatário autorizado e detentor da ficha técnica

Kingfisher International Products B.V.,
 Rapenburgerstraat 175E, 1011 VM Amsterdam, The Netherlands

David Awe
 Group Quality Director

28/02/2022

In more detail...



TITAN

Manufacturer, Fabricant, Producent, Producător, Fabricante:

UK Manufacturer:

Kingfisher International Products Limited
3 Sheldon Square, London, W2 6PX
United Kingdom
www.kingfisher.com/products

EU Manufacturer:

Kingfisher International Products B.V.
Rapenburgerstraat 175E
1011 VM Amsterdam
The Netherlands
www.kingfisher.com/products

- | | | |
|-----------|--|---|
| EN | www.screwfix.com
www.screwfix.ie | To view instruction manuals online, visit
www.kingfisher.com/products |
| FR | www.bricodepot.fr | Pour consulter les manuels d'instructions en ligne,
rendez-vous sur le site www.kingfisher.com/products |
| ES | www.bricodepot.es | Para consultar los manuales de instrucciones en línea,
visite www.kingfisher.com/products |
| PT | www.bricodepot.pt | Para consultar manuais de instruções online, visite
www.kingfisher.com/products |