

Crabtree


DL21891/A - SF

Wiring Accessories


Fitting and wiring Instructions -

- 1). Before commencing work switch off the power supply by removing the fuse in the fuse box, or should isolate at main switch as neutral is a live conductor.
- 2). If unit is to be used as a replacement for an existing product, remove existing unit from its location and disconnect the wiring.
- 3). Connect the wires as shown in appropriate wiring diagrams below and overleaf. Use green/yellow sleeving on earth conductors not insulated. Ensure terminals are properly tightened and no bare wire is visible. Push back unit into mounting box making sure conductors are not trapped.
- 4). Screw the unit to the mounting box using screws provided. Do not over tighten fixing screws.
- 5). **These products must be installed in accordance with the latest Building and IEE wiring regulations.**
If in any doubt, please contact a qualified electrician


1 GANG 1 WAY 10AX ARCHITRAVE SWITCH

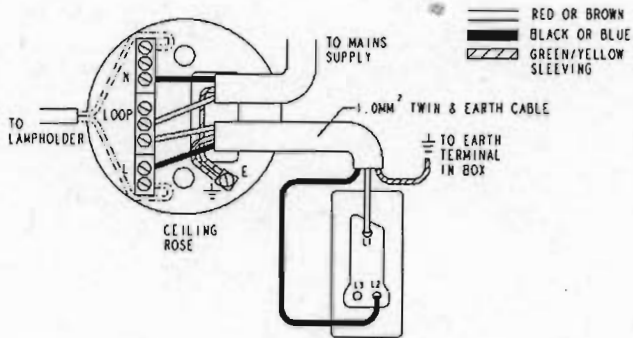


1 GANG 2 WAY 10AX ARCHITRAVE SWITCH

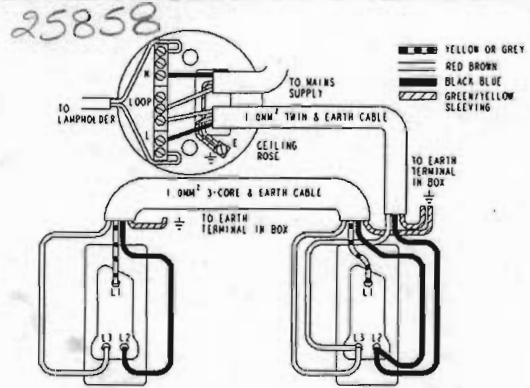

20A D.P. SWITCH

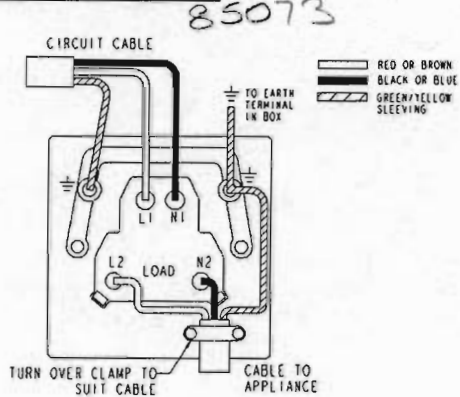

20A CORD OUTLET

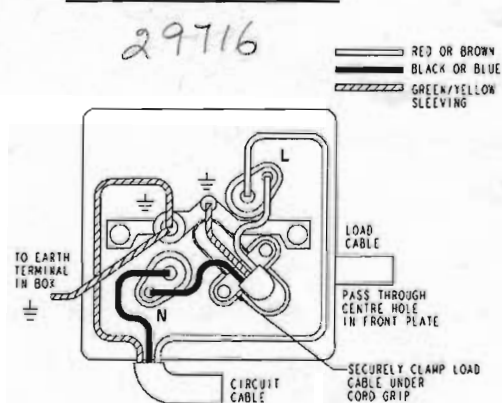

45A COOKER CONTROL UNIT

