

Deck Sink Mixer

Installation and Maintenance Instructions

REMOVING OLD TAPS OR MIXER


- 1 A "Tap Spanner" may be required. This can be purchased in store.
- 2 Ensure mains water supply is turned off at the stopcock or service valves.
- 3 After disconnecting the water supply, drain the pipework.
- 4 Unscrew the nuts connecting the water pipes to the fittings.
- 5 Be careful to save and inspect the fibre washer between the base of the tap tails and the water pipe.

FITTING YOUR NEW MIXER

Fitting your new mixer is easy when you follow these simple step-by-step instructions.

- 1 Identify all components.

Shoulder Washer
fitting Surface
Backnut
Sealing Washer
Water Pipes

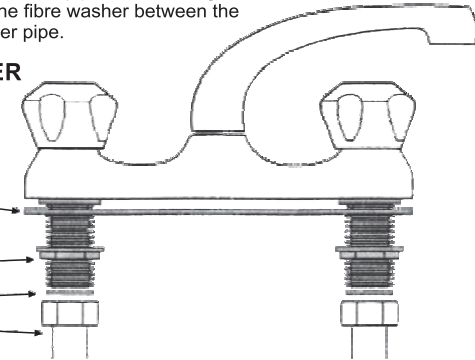


- 2 Before installation fully flush out the pipework to prevent any grit lodging on the valve seat inside the top body as grit will quickly wear the washer.
- 3 Ensure that the shoulder washer is placed between base of mixer and the fitting surface. Silicone Sealant may also be used to further seal these items, then carefully position your mixer in place.
- 4 Screw up the backnut, ensuring that the tap or mixer is in the correct position, taking care not to overtighten this nut, as it could damage the bath.
- 5 Reconnect the supply pipes, checking that the sealing washers are in good condition. If not the fibre washers should be replaced.
- 6 Turn on the taps and water supply at the stopcock or service valves.
- 7 Your taps are now fitted and ready for use.

This product should be fitted in accordance with Water ByLaw Regulations
Check valves should be fitted where necessary.

AFTERCARE INSTRUCTIONS

Whilst modern plating techniques are used in the manufacture of this item, the surfaces will wear if cleaned incorrectly. Clean this product with a soft cloth and clean water. The use of any abrasive material will invalidate the guarantee.



Fully remove grub screw from mixer if fitted.
Insert spout into body ensuring white plastic collar is positioned, so that gap in collar aligns with screw hole.
Push spout fully into body and insert screw.
The screw should be inserted into hole and tightened.
The screw should not be tightened onto the collar

Please ensure to fit spout prior to installation of mixer to sink