

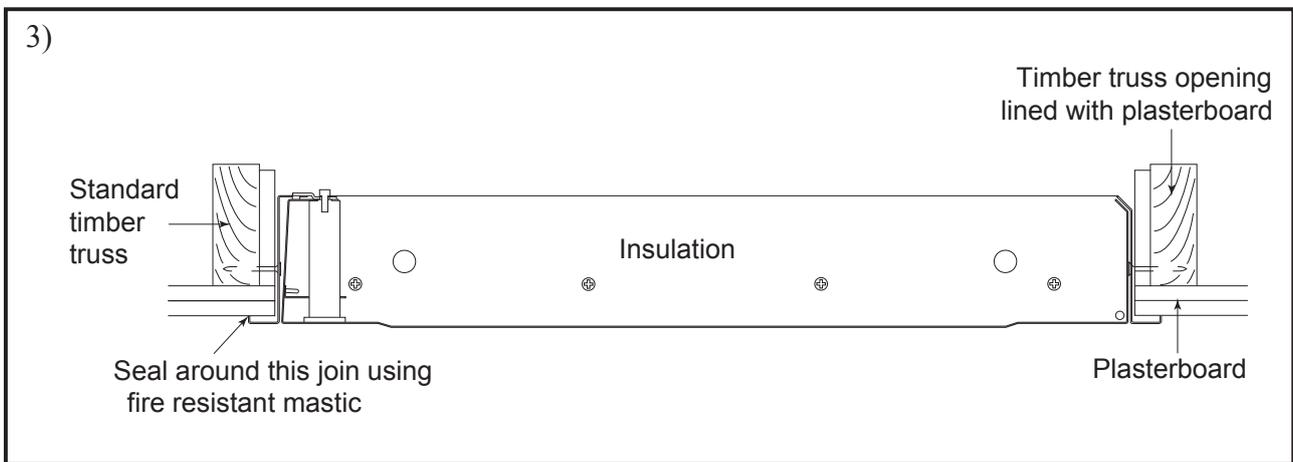
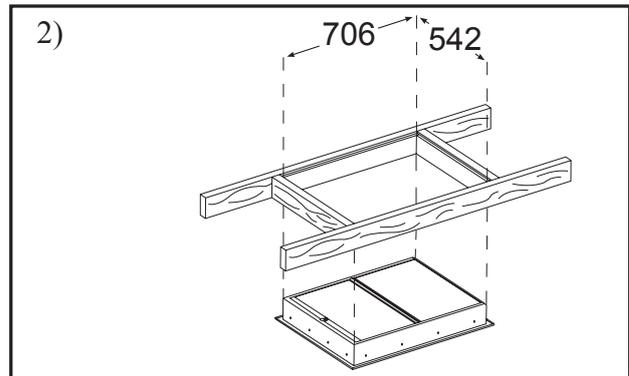


## One Hour Fire Rated Drop Down Loft Access Door

CODE GL 280 F

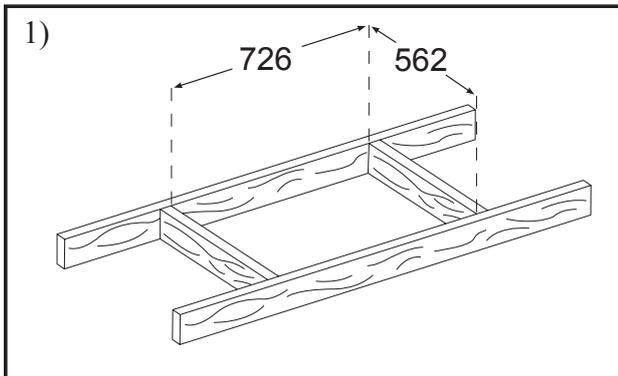

### Fitting Instructions:

- 1) Trim out a suitable opening and fix noggins spanning between trusses to form a clear opening of 726mm x 562mm.
- 2) Fit a layer of 10mm plasterboard 95mm up the edge of the joist. This leaves an opening of 706mm x 542mm.
- 3) The ceiling should preferably be fully finished and painted before installation of the unit. Offer up the door and frame in the open position ensuring it sits squarely and flush against the ceiling. Use 50mm long woodscrews to secure the frame through the 16 no. pre punched holes. Finally seal around the join between the frame and ceiling using a fire resistant mastic.
- 4) Close the door and lock the catch use the 'T' key provided.

MANTHORPE BUILDING PRODUCTS LTD  
 MANTHORPE HOUSE  
 BRITAIN DRIVE  
 CODNOR GATE BUSINESS PARK  
 RIPLEY  
 DERBYSHIRE DE5 3ND

TEL: 01773 514 200  
 FAX: 01773 514 262  
 EMAIL: sales@manthorpe.co.uk  
 WEB: www.manthorpe.co.uk

DRN M.R

Date 01.09.06

DRG No

**MBP 8197**

Issue

**D**

The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.