


Technical: wiring accessories

Lisse Screwless Deco

50A DP switches & 45A DP cooker control units

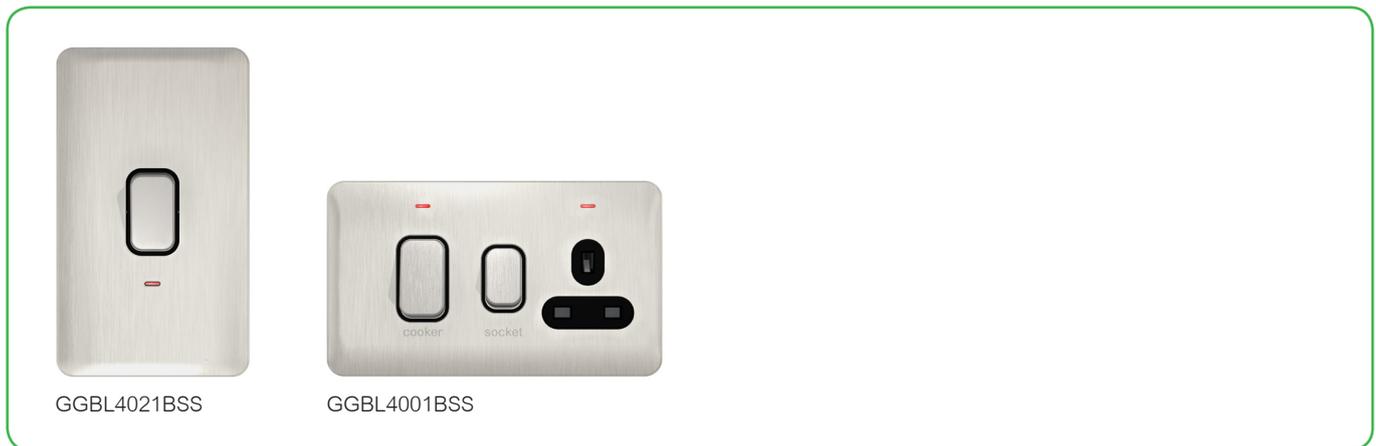

Description

This range of higher rated switches and cooker control units are designed to meet the needs of commercial and residential appliances, such as cookers, heaters, commercial refrigeration, air conditioning units, showers etc. This family of products benefits from all of the time and space saving design features of the Lisse Screwless Deco range.

Fully manufactured in accordance with latest British & International Standards and third party certified.

Features & benefits

- Large plate footprint provides extra strength and reduces the need for additional decorating.
- 7mm raised edge offers easy installation for new buildings and retrofits.
- Cable markings on all products with a moulded template to check the stripped wire length.
- Square caged terminals with generous cable capacity.

Technical specifications	
Voltage rating:	240V 50Hz
Current rating:	50A (switches and cooker connection unit) 45A with 13A Switched Socket Outlet (cooker control units)
Terminal capacity: (no. of cores to each terminal hole)	4.0mm ² 4 6.0mm ² 3 10mm ² 2 16mm ² 1
Dimensions:	87 x 87mm (1 gang) 148.5 x 87mm (2 gang)
Operating temperature:	Switches: Ambient temperatures not normally exceeding 25°C but occasionally reaching 35°C Cooker control switches: -5°C to 40°C *Average value over 24h not exceeding 25°C
Mounting box depth:	47mm
Fixing screws:	M3.5 x 30mm
Standard of compliance:	BS 60669-1 (switches) BS 4177 (cooker control units)


Technical: wiring accessories

Lisse Screwless Deco

50A DP switches & 45A DP cooker control units

Part code structure

- 10 Plate switches
 - 20 20AX switches & flex outlets
 - 30 Sockets
 - 40 50A switches & 45A control units
 - 50 Fused connection units
 - 60 Dimmers
 - 70 Shaver sockets & data communication
 - 80 Blank plates
- SS Stainless Steel
 - PC Polished Chrome
 - MB Mocha Bronze
 - SB Satin Brass
 - PB Polished Brass
 - PW Painted White
 - LC Light Copper

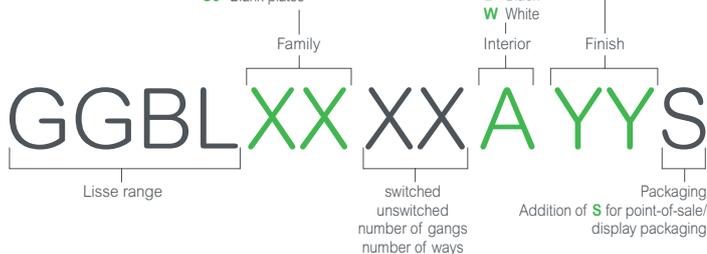


Range

50A switches	
GGBL4011AYY	Control switch - 1 gang LED indicator - 50A DP
GGBL4021AYY(S)	Control switch - 2 gang LED indicator - 50A DP
45A cooker control units	
GGBL4001AYY(S)	Switched socket - 1 gang - 13A


Dimensions

50A switches

1 gang




2 gang

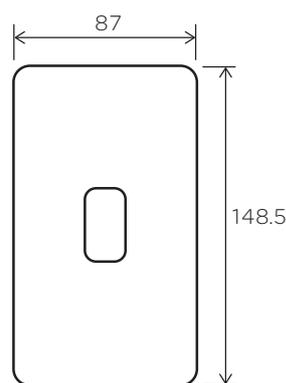

Cooker control units

2 gang

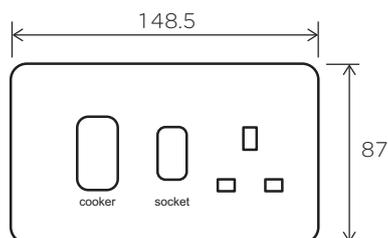

Configuration, packaging type and stock availability

Finishes	Inserts	Packaging option	Stock availability
Stainless Steel (SS)	White	Standard box	MTS
		Shelf ready box & display packaged	MTS
	Black	Standard box	MTS
		Shelf ready box & display packaged	MTS
Polished Chrome (PC)	White	Standard box	MTS
		Shelf ready box & display packaged	MTS
	Black	Standard box	MTS
		-	-
Satin Brass (SB)	White	Standard box	MTO
		-	-
	Black	Standard box	MTS
		Shelf ready box & display packaged	MTS
Mocha Bronze (MB)	White	-	-
		-	-
	Black	Standard box	MTS
		Shelf ready box & display packaged	MTS
Painted White (PW)	White	Standard box	MTO
		-	-
	Black	-	-
		-	-
Polished Brass (PB)	White	Standard box	MTO
		-	-
	Black	Standard box	MTO
		-	-
Light Copper (LC)	White	Standard box	MTO
		-	-
	Black	-	-
		-	-

MTO = made to order
MTS = made to stock

Steel mounting boxes	
SB471	1 gang 47mm deep
SB472	2 gang 47mm deep