



# Outdoor Wall Light

## Installation Instructions

These instructions on wiring and installation are provided as a guideline to assist you. If at any time you are unsure of how to proceed, please consult a qualified electrician.

### Important!

This light fitting must be connected to the supply earth. If your lighting circuit does not have an earth, ask a qualified electrician to provide an earth facility. Light fittings should be connected to a 5 amp fused circuit. This light fitting is suitable for outdoor use only.

### Before Starting

Please read through these instructions before commencing work, and keep them for future reference.


Please Take Extreme Care When Carrying Out These Instructions

### Warning!

Always switch off electricity supply at the mains during installation and maintenance. We recommend that the fuse is withdrawn or the circuit breaker is switched off whilst work is in progress. Do not just turn off at the wall switch. All fittings must be installed in accordance with current IEE wiring regulations. During use this product gets hot - Always switch off and allow to cool before touching.

### Installation:


- 1) Remove existing light fitting (if applicable) and take a note of the wiring positions.
- 2) Remove mounting box (A) from product by removing dome nuts (C) and washers (D). Pull terminal block off of retaining pegs in mounting box. Carefully pierce a small hole in the rubber gasket in the centre of the mounting box to allow the cable to pass through.
- 3) Thread the cable through the hole and fix the mounting box to the wall using the screws and plugs supplied (B). Ensure the drain hole is at the base of the mounting box. Take care not to damage any concealed wiring.

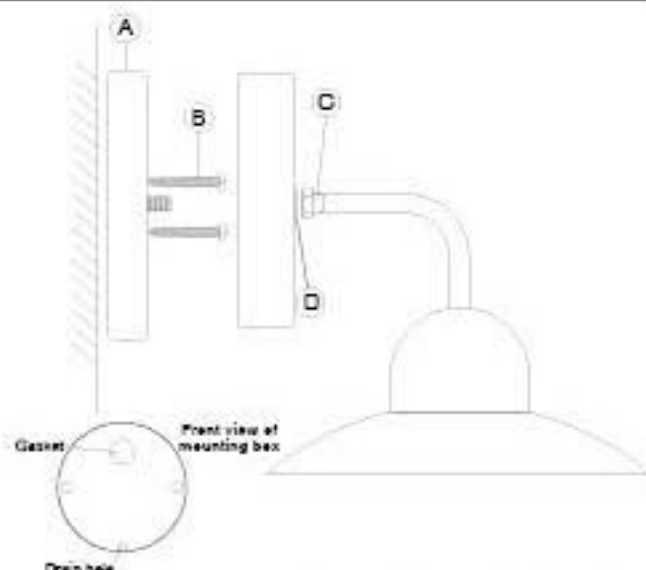

### Wiring:

Please note that the IEE Wiring Regulations (BS 7671) have changed the colours of cable used for fixed wiring for all new electrical installations.


- 1) Connect household live wire to brown wire on product (or terminal on terminal block marked 'L').
- 2) Connect household neutral wire to blue wire on product (or terminal on terminal block marked 'N').
- 3) Connect household earth wire (Green/yellow) to Earth wire on fitting, or terminal marked with the earth symbol.
- 4) Check that you have correctly identified the house wires, the connections are tight and that no loose strands have been left out of the connection block.
- 5) Wrap the terminal block in tape, 2cm each side of the connections
- 6) Push terminal block back onto the retaining pegs inside mounting box.
- 7) Ensuring the lampholder is facing downwards, fit the product back on to the mounting box and refit washers (D) and dome nuts (C), tighten dome nuts to secure.

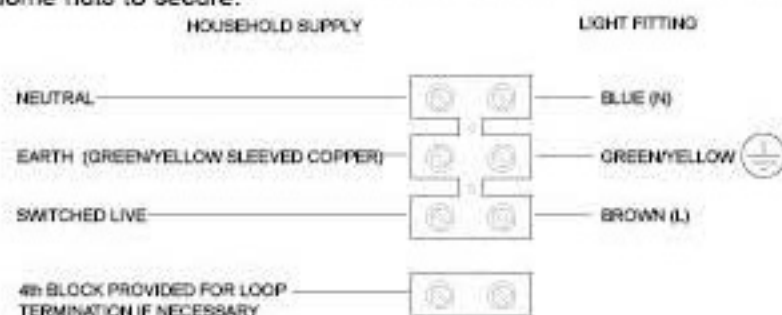

### Attaching the glass and metal shades

To attach the metal and glass shades to the product, place metal shade (F) over glass shade (H), ensuring rubber seal (G) is fitted onto the glass. Screw into collar (E).

Please remember that when you remove the glass shade the metal shade will also become detached. (e.g. when changing the bulb).

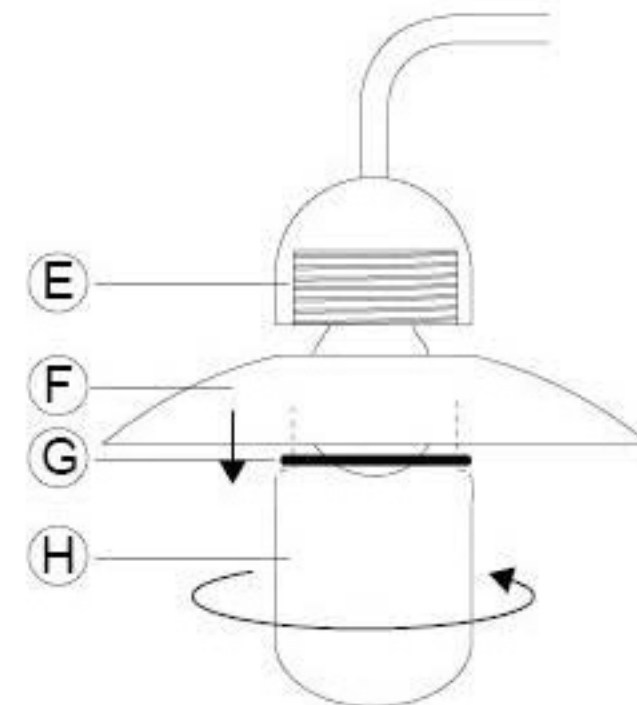

### Fitting / Replacing the bulb

Bulb type - 60w Maximum Gls E27 (es), or equivalent 11w E27 Energy Saver Bulb.

Do not exceed this wattage as this may cause the product to overheat.

Always switch off and allow product to cool before changing the bulb.

- 1) Unscrew the glass shade and remove. Remember the metal shade will also become detached when the glass shade is removed.
- 2) Remove the old bulb by turning anti-clockwise.
- 3) Insert new bulb turn clockwise.
- 4) Ensuring rubber seal is in place, re-fit the metal shade over the glass shade and screw into the collar.

### Care and Use

Do not use abrasive materials and cleaners on these products as this may damage the finish. Do not clean the units with a pressure washer. Wipe clean using a soft, damp cloth.



Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.