

TRITON


**KYLIE
Shower Head
(MIXER ONLY)**

ONE YEAR
GUARANTEE

1



**SAFETY CRITICAL
TRITON ACCESSORY**

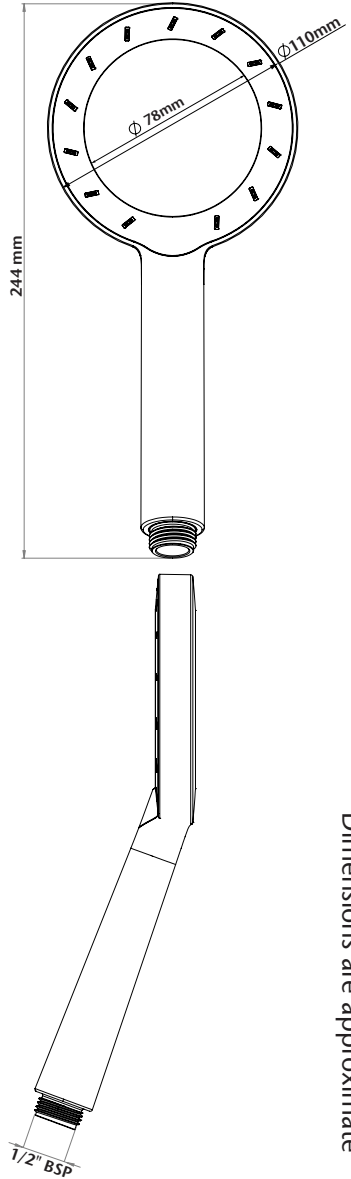

Dimensions are approximate

INSTALLERS PLEASE NOTE THESE INSTRUCTIONS ARE TO BE LEFT WITH THE USER

2181623C - April 2021

Maintenance Instructions

INSTALLATION

Before installing the shower head, flush the pipework through to remove any debris that may be in the system.

TYPE OF SHOWER HEAD

Fitting the correct type of shower head is critical to the safe performance of your shower, especially if you have an electric shower. Some shower heads are only suitable for use on mixer showers as the flow of water from them can be restricted or stopped completely, which can result in a build-up of potential hot water which could, under pressure, be unexpectedly released.

You can therefore, rest assured when you purchase a genuine Triton electric shower head that it has been fully tested for use in the UK on all electric shower types.

CLEANING YOUR SHOWER HEAD

Triton recommends that all products are cleaned using warm, soapy water.

DO NOT use abrasive or aggressive chemical cleaning products as this may affect the product surface and finish.

Before cleaning, turn off the unit at the mains supply to avoid the shower being accidentally switched on. The shower head may be cleaned by simply rubbing your thumb over the spray plate.

IT IS IMPORTANT TO KEEP THE SHOWER HEAD CLEAN TO MAINTAIN THE PERFORMANCE OF THE SHOWER.

The hardness of the water will determine the frequency of cleaning. For example, if the shower is used every day in a very hard water area, it may be necessary to clean the shower head on a weekly basis.

Triton Showers
Triton Road
Nuneaton
Warwickshire CV11 4NR

Triton is a division of Norcross Group (Holdings) Limited

INSPECTING THE HOSE


Your shower hose should be inspected from time to time for signs of damage or internal collapse.

Internal collapse can restrict the flow rate from the shower head and may cause damage to the shower, especially an electric shower.

Triton recommends use of a branded anti-twist hose on all showers to ensure continuous safe performance.

To inspect your hose:

1. Unscrew the hose from the shower head and the shower outlet.
2. Inspect the hose for damage, internal kinks, etc.
3. If necessary, replace the hose.

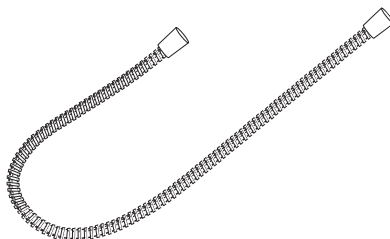

KYLIE REPLACEMENT CODES

SFXSHUKYLIE1WHT.....White/Chrome
SFXSHUKYLIE1CHR.....Chrome

Customer Experience: 024 7637 2222
Trade Installer Hotline: 024 7637 8344
www.tritonshowers.co.uk

E-mail: serviceenquiries@tritonshowers.co.uk
technical@tritonshowers.co.uk

For product guarantee information please go to www.tritonshowers.co.uk/help-and-support

TRITON reserve the right to change product specification without prior notice. E&OE. © TRITON SHOWERS 2020