




The Door Lock People

Know your cylinder

Cylinders ref: 4000 series


Single Cylinder -

Opening from one side only (external side door) where security is required on one side and controlled access on the other.




Double Cylinder -

Ensures controlled access from both sides of the locks.

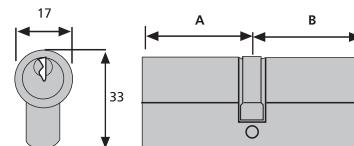


Thumbturn Cylinder -

Ideal for locations that require controlled access from one direction and easy access from the other.

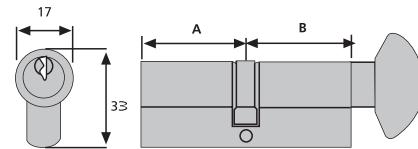

Measure from the centre of the screw hole to the end of cylinder see diagrams.
Measurement (A) is the centre to the edge of the cylinder which is outside facing.
Measurement (B) is the centre to the edge of the cylinder which is inside facing.
If your cylinder is offset ie.one side is longer than the other, you measure in the same way.

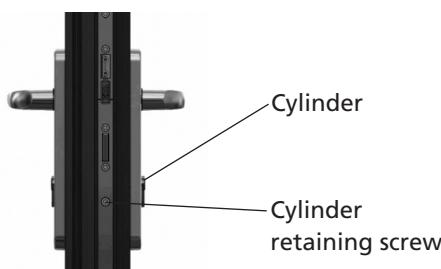

Removing your cylinder

1. Unscrew and remove cylinder retaining screw.
2. Insert key in cylinder, rotate key whilst pushing cylinder from the other side.
3. Remove cylinder and measure as above.

Reduce the risk with ERA PRODUCTS LTD
Call 01922 490000 for your FREE brochure
www.era-security.com

TECHNICAL HELPLINE
01922 490 050