


HSA6000 series

Wirefree Yale HSA6060 Remote keyfob controller

(Yale part number: 666060001001)

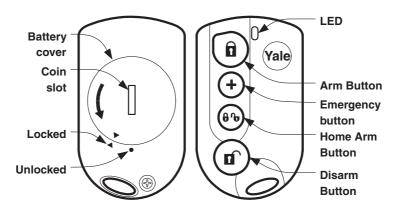

Pack contents

- 1 x HSA6060 Remote Keyfob controller.
- 1 x 3V C2032 cell.

Keyfob description

LED: Red LED indicates keyfob state. Arm button: Press for Away Arming. Emergency button: Press for Personal alarm.

Home Arm button: Press to partially arm. Disarm: Press to switch alarm off or to silence alarm.

Specification

Conforms to:

EN 300 220-1 / V2.1.1 (2006-04) EN 301 489 -1, / V1.6.1 (2004-12) EN 301 489-3, / V 1.4.1 (2002-08)

Environmental conditions:

-10°C to 40°C, relative humidity 70% non-condensing

Radio: Microcontroller controlled 433.92MHz AM transmitter.

Battery: 3V, CR2032 lithium coin cell. 3 years typical domestic service life

ASSA ABLOY

Battery installation

- 1 Remove the battery cover by using a coin to turn counter-clockwise until the arrow is pointing to the round dot (unlocked).
- 2 Insert the battery with the positive (+) side up.
- **3** To replace the battery cover ensure the arrow is pointing towards the dot and turn the cover clockwise until the arrows are pointing towards each other (locked).

Programming & testing

Program your Keyfob before installation and test afterwards. Please see your current system instruction book.



Yale UK

School Street, Willenhall West Midlands WV13 3PW Tel +44 (0)1902 364647 Fax +44 (0)1902 364692 E-mail info@yale.co.uk

www.yale.co.uk



NoPb

C€



An ASSA ABLOY Group brand

E1 12/06 ASSA ABLOY