



Loft 2 Light Cabinet Lights Installation Instructions

14466



Before Starting

Please read through these instructions before commencing work, and keep them for future reference.
Please Take Extreme Care When Carrying Out These Instructions.

Warning!

This light fitting is Class 2 and does not need to be Earthed.

ELECTRICAL SAFETY

All fittings must be installed in accordance with the current edition of the IEE Wiring regulations (BS7671:Requirements for Electrical Installations). If in doubt, consult a qualified electrician.

Before commencing any work ensure the supply is switched off at the mains. Either by switching off main switch at the consumer unit or by removing the appropriate fuse.

Ensure all terminal screws are tight and all wires are neatly routed and not unduly stretched or pinched.

If connecting to a switch, the switched live conductor must be appropriately identified.

If drilling new holes, be sure to locate cables before beginning work, to avoid electric shock and damage to existing circuits.

Installation

This product is designed for use on top of kitchen cupboards, bookshelves, cabinets etc. Suitable for indoor use only

Not suitable for bathrooms.

Lay out/ measure the positions of the head units as desired. Ensure you route cables to avoid accident or damage occurring. Cables can be taped to mounting surface after installation.

The heads are pre-wired to a 'Y' shaped loom. They will spread up to 2m and the transformer can be mounted up to 1m away from the centre point. See layout examples overleaf.



Mount the head units with the fixings provided.


Connect head loom to transformer cable.

Electrical installation

Simply plug into a standard 3 pin wall socket.

Alternatively, connect the supplied mains lead to a 3 Amp fused connection unit by removing the plug. The Brown wire must be connected to the terminal marked L. The Blue wire must be connected to the terminal marked N. See below. Using this method the kit can be controlled via a wall switch. If in doubt please consult a qualified electrician.

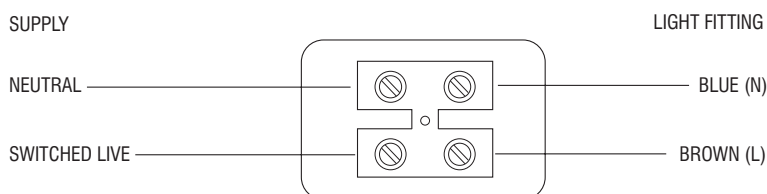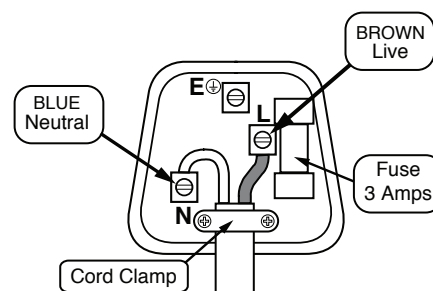

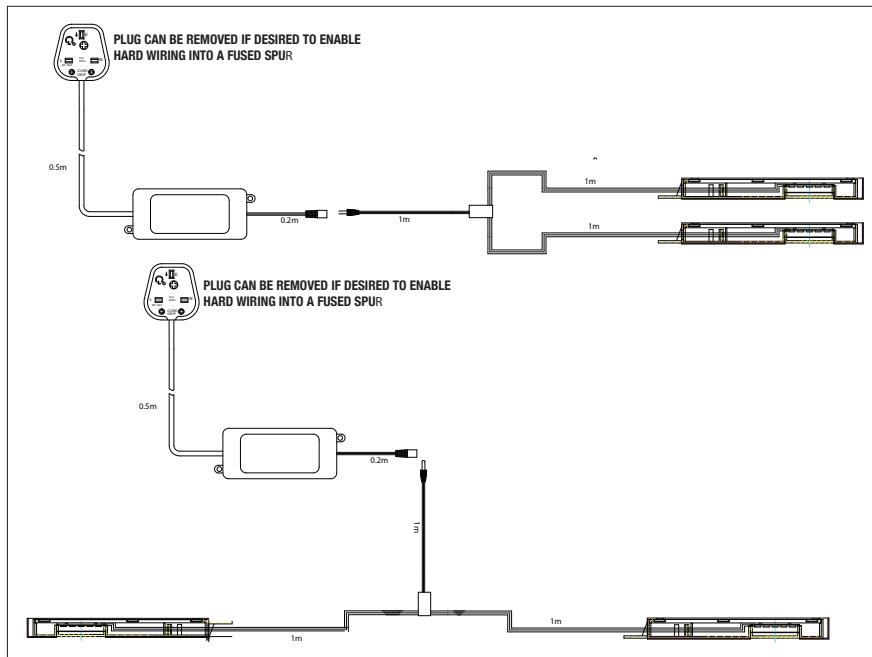

Fitting/Replacing the bulb

This fitting has non replaceable LEDs.

Care and cleaning

Finish - We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will damage the finish.

Safety Information

For your safety, always switch off the supply before cleaning or removing shades.



Waste electrical products should not be disposed of with normal household waste. Please recycle where facilities exist. Check with your Local Authority for recycling advice.