Radiator Name: Odin 1823

REINA

This product must be fitted only by a fully qualified installer

Description	Illustration	Qty
Radiator		1
Bracket		4
Fixing Screw		4
Wall Anchor		4
Security Screw		4
Air Vent		1
End Plug		1

Description	Illustration
Fixings choose the appropriate fixing for the wall material if required	
PTFE tape	
Electric drill	
Masonry drill bit appropiate to the fixings	
Adjustable spanner	
Radiator valve Hex Key	
Flat head and Philips head screw drivers	
1 Lock shield valve and 1 Gate or Thermostatic valve	
Spirit level	
Measuring tape	

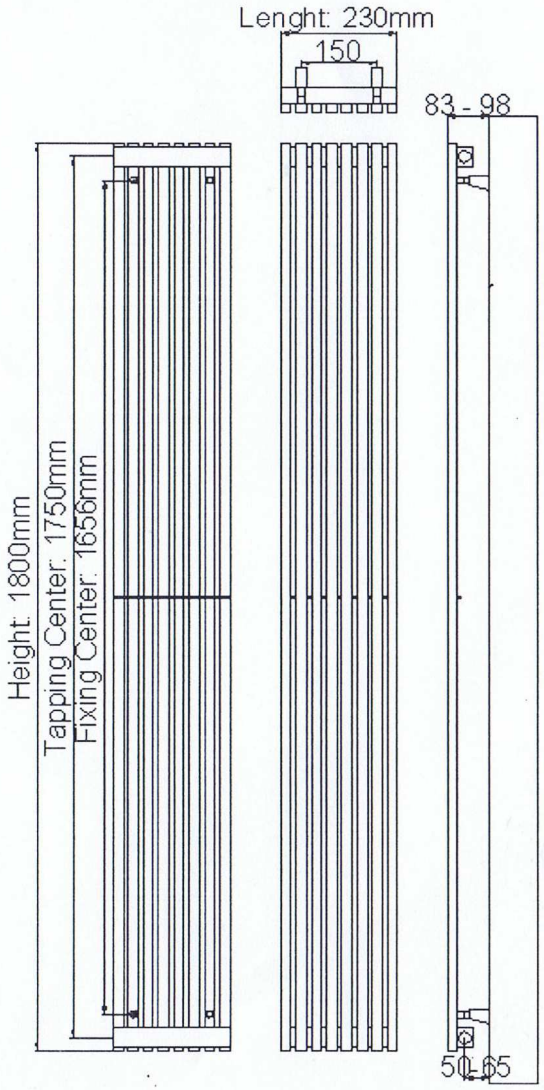

Screw the 4 X inserts (3) onto the nuts welded on the back of the radiator.slide 4 X brackets (2) onto inserts and secure with grub screws (4). **1**

Site the unit against the wall. It should not be mounted closer than 50mm below any overhanging surface (i.ei shelf) and no lower than 100mm from the floor. Transfer the bracket drill position measurements to the wall. **2**

Remove the unit, drill and insert wall plugs (or other suitable fixings). **3**

Insert screw through bracket sleeve and fasten brackets. Position rad then tighten the grub screws. **4**

Horizontal installation: The internal flow divertor must be pressed flat when installing these radiators horizontally. Failure to follow this instruction will lead to incorrect operation. **5**

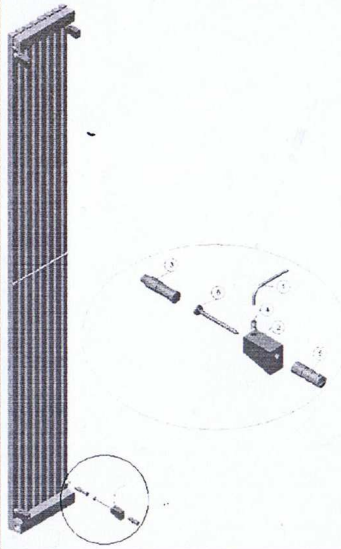

GENERAL RECOMMENDATION

Before fitting the radiator it is necessary to wash out the heating system to remove any existing mud, scale, work residues, iraces of flux, oil etc "" When the system watr pH is outside the 5.5 - 8.5 range and/or when the dissolved is above 0.1mg/litre, it is always needed to protect the heating system components (the radiator is one of these) with a proper chemical treatment compatible with all parts in contact with water (Silicon rubber too). In order to fit the radiator to the wall, it is necessary to choose the proper fixings for the wall material. If the system water exceeds 50 centigrad degree, please install a warning mark near the radiator to avoid any accidental scalding. Clean the radiator surface only with a soft cloth to avoid scratching the finish and do not use chemical againts during cleaning operations. It is prohibited to climb on the radiator. Maximum working temperature: 95 centrigad degree. maxsimum working pressure 4 bar.