

Radiator Name: PIENZA



This product must be fitted only by a fully qualified installer

| Description | Illustration | Qty. |
|-----------------|--------------|------|
| Radiator | | 1 |
| Bracket | | 4 |
| Connection part | | 4 |
| Fixing screw | | 4 |
| Wall Anchor | | 4 |
| Security Screw | | 4 |

| Description | Illustration |
|---|--------------|
| Fixings choose the appropriate fixing for the wall material if required | |
| PTFE tape | |
| Electric drill | |
| Masonry drill bit appropriate to the fixings | |
| Adjustable spanner | |
| Radiator valve Hex Key | |
| Flat head and Phillips head screw drivers | |
| 1 Lock shield valve and 2 Gate or Thermostatic valve | |
| Spirit level | |
| Measuring tape | |

GENERAL RECOMMENDATION

Before fitting the radiator it is necessary to wash out the heating system to remove any existing mud, scale, work residues, traces of flux, oil, etc... When the system water pH is outside the 5,5 - 6,5 range and / or when the dissolved is above 0,1 mg/L, it is always needed to protect the heating system components (The radiator is one of these) with a proper chemical treatment compatible with all parts in contact with water (Sillicon rubber too). In order to fit the radiator to the wall, it is necessary to choose the proper fixings for the wall (Sillicon rubber too). If the system water exceeds 50 centigrad degree, please install a warning mark near the radiator to avoid any accidental scalding. Clean the radiator surface only with a soft cloth to avoid scratching the finish and do not use chemical against during cleaning operations. It is prohibited to climb on the radiator. Maximum working temperature: 95 centigrad degree, maximum working pressure 4 bar.

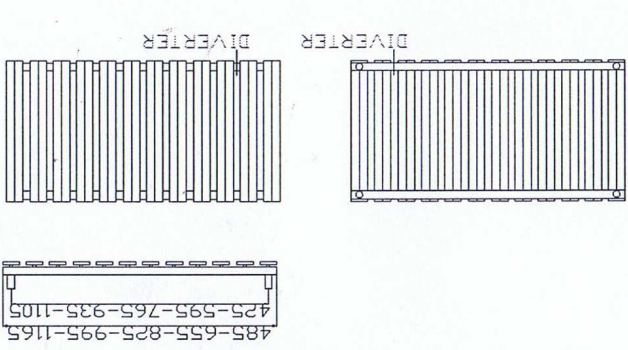

Screw 3x inserts (3) onto the nuts brackets (2) onto inserts and secur with grub screws (4).

1 Site the unit against the wall. It should not be mounted closer than 50mm. below any overhanging surface (i.ei shelf) and no lower than 100mm. from the floor. Transfer the bracket drill position measurements to the wall.

2 Remove the unit, drill and insert wall plugs (or other suitable fixings).

3 Insert screw through bracket sleeve and fasten brackets. Position rad then tighten the grub screws Failure to follow this instruction will lead to incorrect operation.

