


# Technical: wiring accessories

## Lisse Screwless Deco

### 13A unswitched socket outlets

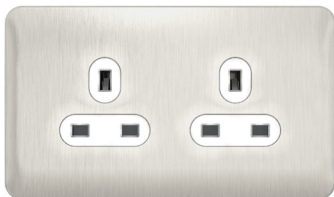

GGBL3060WSS

#### Description

A high quality range of unswitched socket outlets designed for both residential and commercial installations. This family of products benefits from all of the design features of the Lisse Screwless Deco range such as time and space saving solutions, as well as a comprehensive array of installation-friendly aspects.

Fully manufactured in accordance with latest British & International Standards and third party certified. All 2 gang socket outlets include twin earth terminals as standard, enabling high integrity earthing.

#### Features & benefits

- Large plate footprint provides extra strength and reduces the need for additional decorating.
- 7mm raised edge offers easy installation for new buildings and retrofits.
- Minimum back projection frees up space in the back box for cabling.
- One and two gang spacers available for added installation depth.
- Backed out and captive screw terminals to allow for positive drive and speed of installation.
- In-line, angled terminals for easier cabling access.
- Twin earth terminals on all 2 gang 13A socket outlets, for high integrity earthing.
- Cable markings on all products with a moulded template to check the stripped wire length.
- Light grey back moulding colour for easier terminal identification.
- Square caged terminals with generous cable capacity.


Technical specifications	
Voltage rating:	240V
Current rating:	13A
Terminal capacity: (no. of cores to each terminal hole)	2.5mm <sup>2</sup> 5 4.0mm <sup>2</sup> 3 6.0mm <sup>2</sup> 2 10mm <sup>2</sup> 1 16mm <sup>2</sup> 1
Dimensions:	87 x 148.5mm
Operating temperature:	-5°C to 40°C *Average value over 24h not exceeding 25°C
Mounting box depth:	Min. 25mm
Fixing screws:	M3.5 x 25mm
Standard of compliance:	BS 1363

# Technical: wiring accessories

## Lisse Screwless Deco

### 13A unswitched socket outlets

#### Part code structure

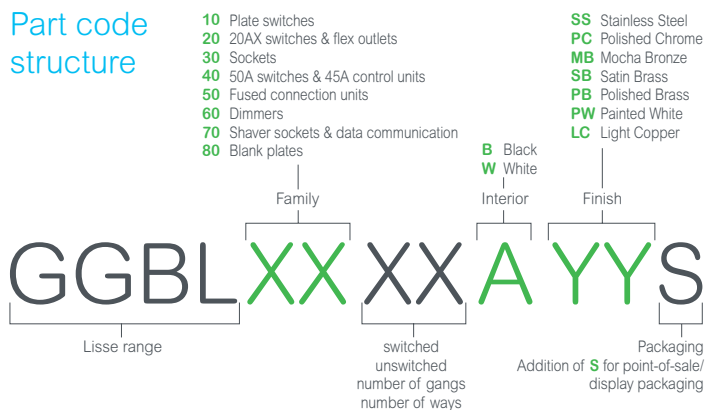


#### Range

13A unswitched socket outlets	
GGBL3060AYYS	Unswitched socket - 2 gang - 13A

Steel mounting boxes	
SB252	2 gang 25mm deep
SB352	2 gang 35mm deep

#### Dimensions

##### 2 gang

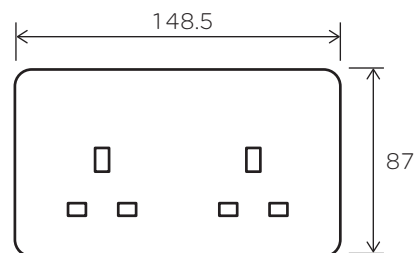

#### Configuration, packaging type and stock availability

Finishes	Inserts	Packaging option	Stock availability
Stainless Steel (SS)	White	Standard box	MTS
	White	Shelf ready box & display packaged	MTS
Black	Black	Standard box	MTS
	Black	Shelf ready box & display packaged	MTS
Polished Chrome (PC)	White	Standard box	MTS
	White	Shelf ready box & display packaged	MTS
Black	Black	Standard box	MTS
	Black	-	-
Satin Brass (SB)	White	Standard box	MTO
	White	-	-
Black	Black	Standard box	MTS
	Black	Shelf ready box & display packaged	MTS
Mocha Bronze (MB)	White	-	-
	White	-	-
Black	Black	Standard box	MTS
	Black	Shelf ready box & display packaged	MTS
Painted White (PW)	White	Standard box	MTO
	White	-	-
Black	Black	-	-
	Black	-	-
Polished Brass (PB)	White	Standard box	MTO
	White	-	-
Black	Black	Standard box	MTO
	Black	-	-
Light Copper (LC)	White	Standard box	MTO
	White	-	-
Black	Black	-	-
	Black	-	-

MTO = made to order  
MTS = made to stock